

ShinMaywa

Submersible Pumps

(Vortex Type)

CV Series



Non-Clogging Vortex Type


Even sewage containing foreign matter hardly "clog" or cause "entanglement" in the pump

There are MANY ADVANTAGES with ShinMaywa Submersible Pump.

●Features and Construction


Cable entry with core wire seal

The core wire seal at the cable entry shuts the water out from penetrating into the motor chamber through the core wires even if the cable tip is immersed in water or the sheath is damaged.




Shaft seal

A highly wear resistant silicon carbide double mechanical seal positively prevents the water from penetrating into the motor chamber. Besides, combined use of an oil seal further extends the service life of the mechanical seal.



Discharge connection

When the guide rail installation type submersible pump is lowered along the guide pipe, the pump is automatically connected to the discharge pipe with the discharge connection.

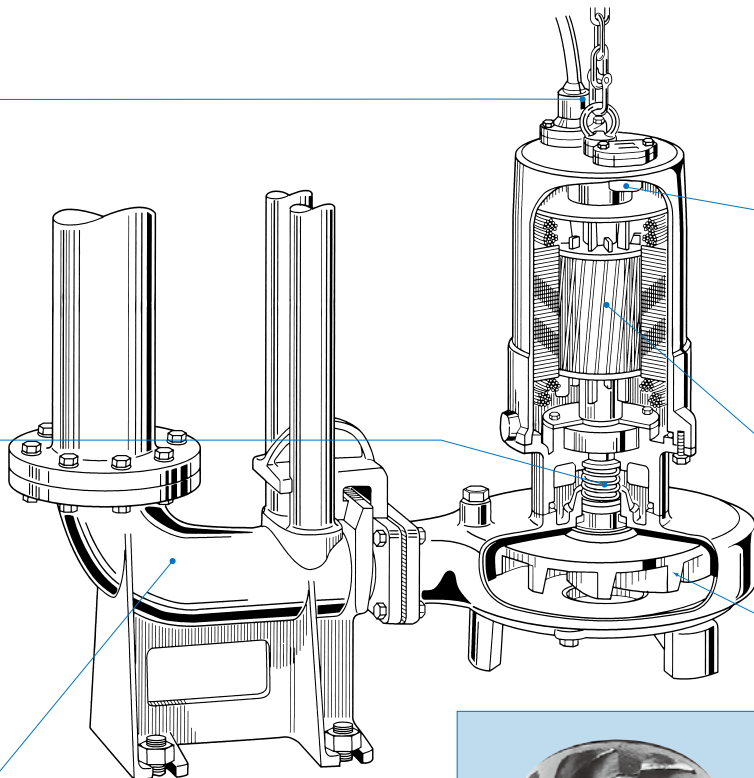

Applications

For sewage and wastewater containing a lot of fibrous solids


- For pump stations in the sewerage/wastewater collection system.
- For transferring/discharging sludge and scum at industrial wastewater treatment plants.
- For transferring/discharging wastewater and sludge at food processing factories or livestock production facilities.
- For use in the raw water tank and/or flow equalization tank at night soil treatment plants.
- For use in the raw water tank and/or flow equalization tank at onsite wastewater treatment systems.

Features of vortex type


As illustrated, vortex impeller provides a broad area for passage, thereby eliminating the possible clogging, winding and/or entanglement of solids, fibrous solids, etc.

Sewage or sludge does not directly pass through the interior of an impeller. As a result, the vortex impeller scarcely abrades while showing an excellent level of durability.

Guide rail installation type

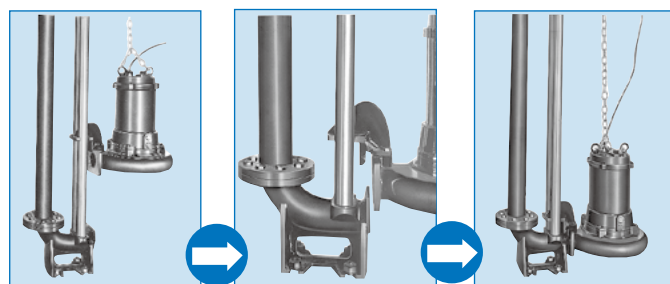


VORTEX TYPE

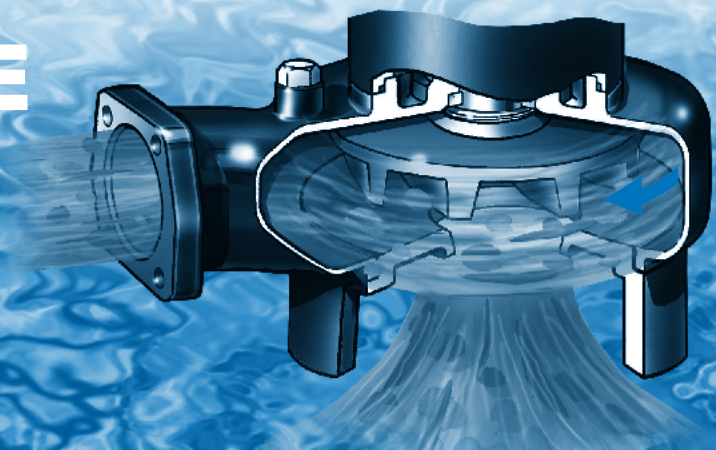

Motor protector


A built-in automatic-reset type motor protector (thermal protector or thermal switches) positively protects the motor from burnout due to overload, locked up impeller and open phase.



Motor

Impeller

A vortex impeller most suitable for each application is employed. Also, dynamic and static balance of impeller are adjusted.

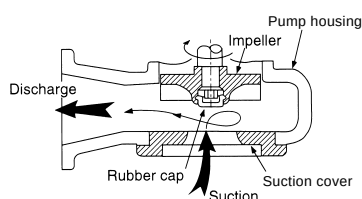

CV-MT CV·CVH

2-Pole
(0.15 to 1.5kW)
4-Pole
(5.5 to 22kW)

Discharge size(mm)	40	50	65	80	100	150
Rated output(kW) 0.15						
0.25						
0.4		•	•			
0.75		•	•	•		
1.5		•	•	•		
5.5						•
7.5						•
11					•	•
15					•	•
22					•	•

CV-MT·CV·CVH

CVS-MT CVS

2-Pole

Discharge size(mm)	40	50	65	80	100	150
Rated output(kW) 0.15						
0.25	•	•				
0.4		•				
0.75		•				
1.5			•	•		
2.2			•	•		
3.7			•	•	•	
5.5				•	•	
7.5				•	•	
11				•	•	
15						
22						

CVS-MT·CVS

CVC-MT CVC

4-Pole

Discharge size(mm)	40	50	65	80	100	150
Rated output(kW) 0.15						
0.25		•				
0.4		•	•			
0.75		•	•			
1.5			•	•		
2.2			•	•	•	
3.7			•	•	•	
5.5				•	•	
7.5				•	•	
11						
15						
22						

CVC-MT·CVC

CVM

4-Pole

Solid passage dia.:
100% of discharge size
(except for CVM150)

Discharge size(mm)	40	50	65	80	100	150
Rated output(kW) 0.15						
0.25						
0.4		•				
0.75		•				
1.5			•	•	•	
2.2			•	•	•	
3.7			•	•	•	
5.5				•	•	
7.5				•	•	
11						•
15						
22						

CVM

CV-MT•CV•CVH Series

<Discharge size> 50 to 150mm
<Rated output> 0.4 to 1.5kW/5.5 to 22kW



2-Pole
(0.15 to 1.5kW)
4-Pole
(5.5 to 22kW)



Standard Specifications

Discharge mm	Pump model	Installation kit No.		Rated output kW	No. of poles	Flow—Total head		Solid passage dia. (Soft solid) mm		Pump weight kg
		Guide rail installation	Free standing			50Hz m ³ /min — m	60Hz m ³ /min — m	50Hz	60Hz	
50	CV501T	P50	F50	0.4	2	0.15 — 5.9	0.15 — 5.9	30	30	17
	CV501			0.75		0.2 — 8.5	0.2 — 8.5	29	32	18
	CV501-MT			1.5		0.2 — 14.7	0.2 — 15.2	32	31	29
65	CV501T	P65B	F65B	0.4	2	0.15 — 5.9	0.15 — 5.9	30	30	17
	CV501			0.75		0.2 — 8.5	0.2 — 8.5	29	32	18
	CV501-MT			1.5		0.2 — 14.7	0.2 — 15.2	32	31	29
	CV651	P65	F65	1.5	2	0.4 — 8.7	0.4 — 8.2	42	42	29
80	CV651	P80	F80	1.5	2	0.4 — 8.7	0.4 — 8.2	46	46	29
100	CVH100	P100C	F100B	11	4	0.8 — 23	0.86 — 23	36	36	192
				15		0.94 — 26	0.9 — 29			208
				22		1.05 — 34	0.92 — 36			262
150	CV150	P150	F150	5.5	4	1.6 — 8.9	1.3 — 8.6	58	58	120
				7.5		1.9 — 9.4	1.6 — 10.5			132
				11		1.9 — 16	1.67 — 16			185
				15		2.15 — 19	2.05 — 20	48	48	197
				22		2.75 — 23	2.15 — 23			256

Performance Curves

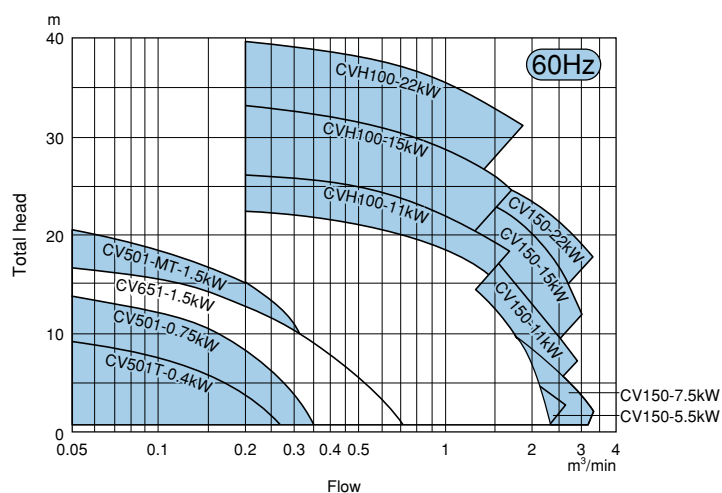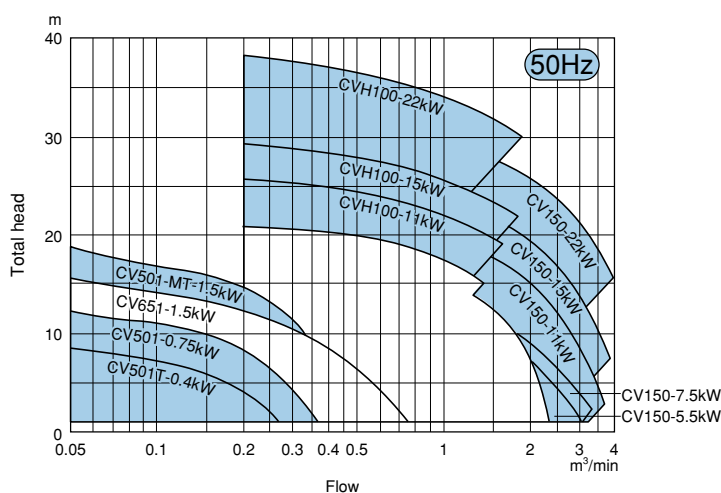

CVS-MT•CVS Series

<Discharge size> 40 to 100mm
<Rated output> 0.25 to 11kW



2-Pole



Standard Specifications

Discharge	Pump model	Installation kit No.		Rated output	Flow—Total head		Solid passage dia. (Soft solid)		Pump weight kg	
mm		Guide rail installation	Free standing		kW	50Hz m³/min — m	60Hz m³/min — m	mm		
								50Hz		60Hz
40	CVS401T-MT	P40	F40	0.25	0.13 — 4.4	0.1 — 4.6	27	27	17	
50	CVS501T-MT	P50	F50	0.25	0.13 — 4.4	0.1 — 4.6	27	27	17	
				0.4	0.17 — 5.0	0.12 — 6.8	29	29	17	
	CVS501-MT			0.75	0.16 — 9.2	0.2 — 8.0	27	27	18	
65	CVS651-MT	P65	F65	1.5	0.42 — 9.0	0.38 — 9.0	16	16	29	
	CVS80	P65	F65	2.2	0.44 — 11.0	0.42 — 11.0	17	17	46	
				3.7	0.51 — 17.0	0.47 — 17.0			55	
80	CVS651-MT	P80	F80	1.5	0.42 — 9.0	0.38 — 9.0	16	16	29	
	CVS80	P80	F80	2.2	0.44 — 11.0	0.42 — 11.0	17	17	46	
				3.7	0.51 — 17.0	0.47 — 17.0			55	
	CVS100	P80	F80	5.5	0.45 — 22.7	0.40 — 23.6	22	22	82	
				7.5	0.55 — 27.2	0.45 — 28.5			92	
				11	0.60 — 33.0	0.60 — 35.6			120	
100	CVS80	P100	F100	3.7	0.51 — 17.0	0.47 — 17.0	17	17	55	
	CVS100	P100	F100	5.5	0.45 — 22.7	0.40 — 23.6	22	22	82	
				7.5	0.55 — 27.2	0.45 — 28.5			92	
				11	0.60 — 33.0	0.60 — 35.6			120	

Performance Curves

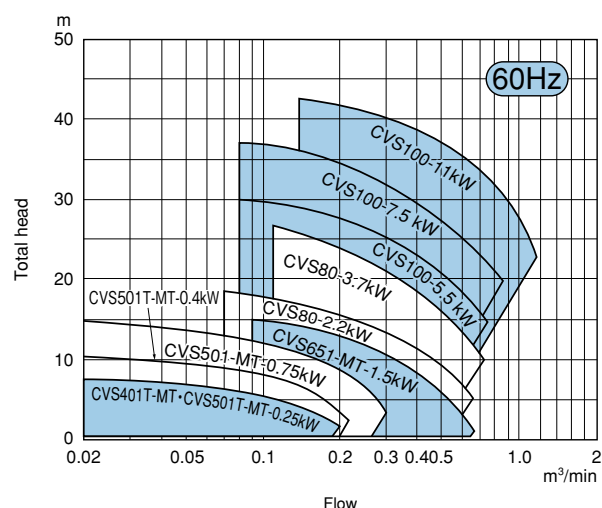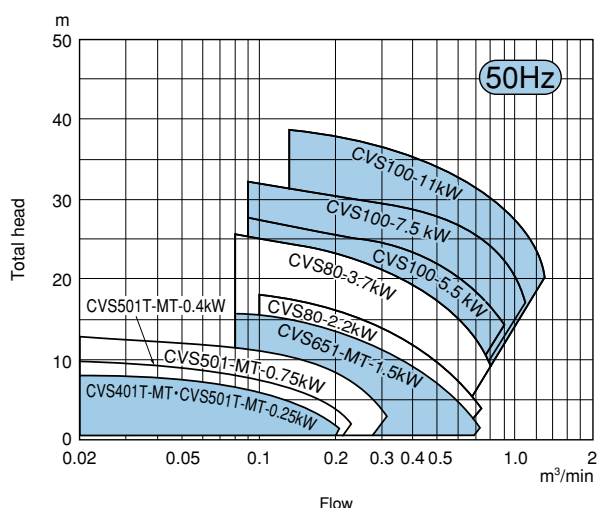

CVC-MT•CVC Series

<Discharge size> 50 to 100mm
<Rated output> 0.25 to 7.5kW



4-Pole



Standard Specifications

Discharge mm	Pump model	Installation kit No.		Rated output kW	Flow—Total head		Solid passage dia. (Soft solid) mm		Pump weight kg
		Guide rail installation	Free standing		50Hz m³/min — m	60Hz m³/min — m	50Hz	60Hz	
50	CVC501	P50	F50	0.25	0.19 — 3.1	0.19 — 3.1	35	35	22
				0.4	0.18 — 4.4	0.18 — 4.6			25
				0.75	0.23 — 6.5	0.23 — 7.1			28
65	CVC501	P65B	F65B	0.4	0.18 — 4.4	0.18 — 4.6	35	35	25
				0.75	0.23 — 6.5	0.23 — 7.1			28
	CVC651-MT	P65	F65	1.5	0.45 — 7.6	0.45 — 8.2	46	46	45
	CVC801	P65	F65	1.5	0.52 — 7.0	0.52 — 6.7	56	56	45
	CVC801-MT	P65	F65	2.2	0.6 — 8.9	0.6 — 8.9			60
				3.7	0.8 — 11.3	0.8 — 11.9			70
80	CVC651-MT	P80	F80	1.5	0.45 — 7.6	0.45 — 8.2	46	46	45
	CVC801	P80	F80	1.5	0.52 — 7.0	0.52 — 6.7	56	56	45
	CVC801-MT	P80B	F80	2.2	0.6 — 8.9	0.6 — 8.9			60
				3.7	0.8 — 11.3	0.8 — 11.9			70
	CVC1001-MT	P80B	F80	5.5	1.2 — 12.2	1.2 — 12.2	70	70	98
				7.5	1.3 — 14.8	1.3 — 16.0			107
100	CVC801-MT	P100B	F100	2.2	0.6 — 8.9	0.6 — 8.9	56	56	60
				3.7	0.8 — 11.3	0.8 — 11.9			70
	CVC1001-MT	P100B	F100	5.5	1.2 — 12.2	1.2 — 12.2	70	70	98
				7.5	1.3 — 14.8	1.3 — 16.0			107

Performance Curves

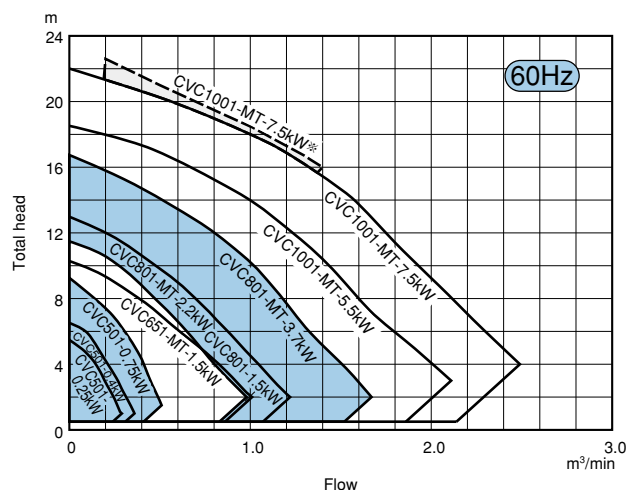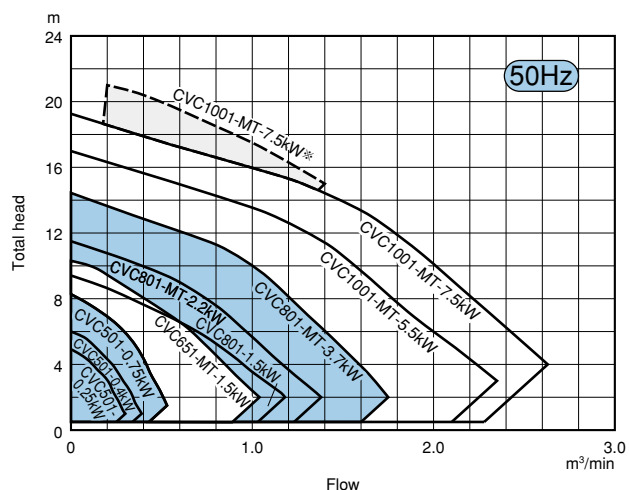


※ Upon consultation

CVM Series

<Discharge size> 50 to 150mm
<Rated output> 0.4 to 7.5kW

4-Pole

Solid passage dia. :
100% of discharge size
(except for CVM150)

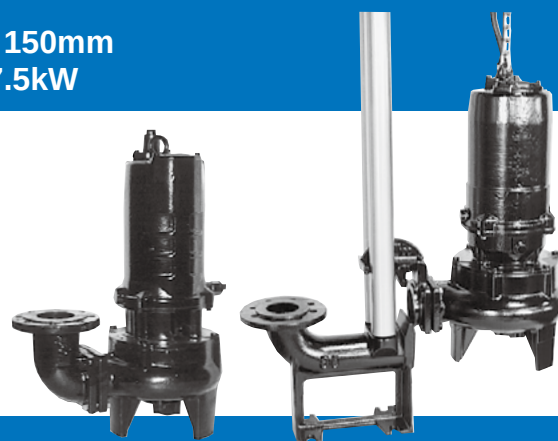



Standard Specifications

Discharge mm	Pump model	Installation kit No.		Rated output kW	Flow—Total head		Solid passage dia. (Soft solid) mm		Pump weight kg
		Guide rail installation	Free standing		50Hz m³/min — m	60Hz m³/min — m	50Hz	60Hz	
50	CVM50	P50	F50	0.4	0.18 — 3.55	0.17 — 3.3	50	50	25
				0.75	0.23 — 4.1	0.22 — 5.7			26
65 (80)	CVM65	P65 (P80)	F65 (F80)	1.5	(1) 0.21 — 6.9 (3) 0.37 — 5.8	(2) 0.20 — 7.5 (4) 0.33 — 6.1	65	65	43
				2.2	(1) 0.28 — 8.8 (3) 0.38 — 7.9	(2) 0.20 — 10.0 (4) 0.34 — 8.4			55
				3.7	(1) 0.52 — 11.4	(2) 0.64 — 10.6			69
80 (100)	CVM80	P80B (P100B)	F80 (F100)	1.5	(5) 0.2 — 6.5 (7) 0.42 — 4.7	(6) 0.16 — 6.9 (8) 0.40 — 4.9	80	80	46
				2.2	(5) 0.26 — 7.2 (7) 0.45 — 5.9	(6) 0.25 — 7.5 (8) 0.38 — 5.8			58
				3.7	(1) 0.42 — 11.0 (3) 0.66 — 9.2	(2) 0.46 — 11.2 (4) 0.57 — 10.0			72
				5.5	(1) 0.56 — 12.4 (3) 0.84 — 11.0	(2) 0.55 — 13.0 (4) 0.86 — 10.8			93
				7.5	(1) 0.47 — 16.4 (3) 0.94 — 14.0	(2) 0.80 — 16.0 (4) 1.00 — 14.4			106
100	CVM100	P100C	F100B	3.7	(5) 0.40 — 9.3 (7) 0.78 — 6.7	(6) 0.30 — 9.5 (8) 0.72 — 6.2	100	100	73
				5.5	(5) 0.62 — 10.8 (7) 1.02 — 8.9	(6) 0.44 — 12.0 (8) 0.86 — 9.4			97
				7.5	(5) 0.52 — 14.6 (7) 0.96 — 12.0	(6) 0.80 — 13.2 (8) 1.05 — 11.8			111
150	CVM150	P150	F150	5.5	(7) 0.51 — 7.6 (9) 0.80 — 6.5	(8) 0.55 — 7.3 (10) 0.64 — 6.2	125	125	107
				7.5	(9) 0.92 — 9.4 (11) 1.32 — 7.6	(8) 0.78 — 9.7 (10) 1.04 — 8.1			123



(80),(100) : Also available with solid passage dia. of 65 and 80mm respectively.

[] : Impeller No.

Performance Curves

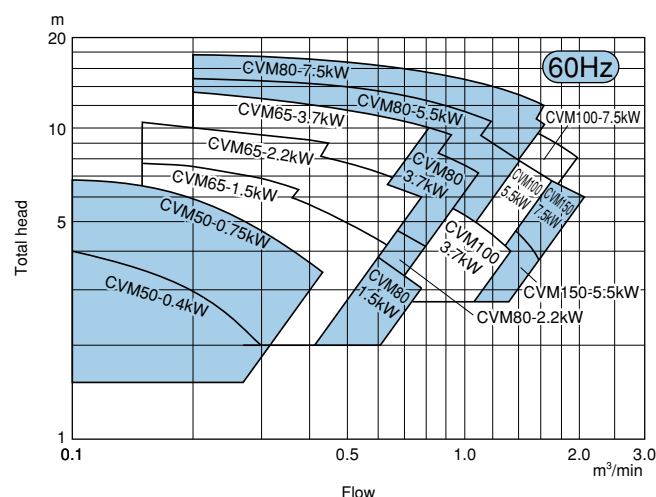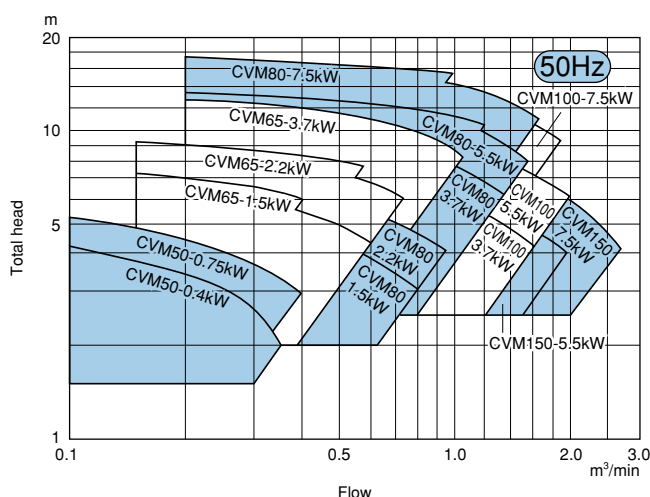

Dimensions




Guide rail installation

Free standing

	Pump model	Installation kit No.	Rated output kW	A	B	C	D	E	F	Pump model	Installation kit No.	Rated output kW	A	B	C	D				
CV-MT CV CVH	CV501(T)	P50	0.4 · 0.75	461	427	156	180	550	350	CV501(T)	F50	0.4 · 0.75	415	229	156	135				
		P65B			500						F65B			324						
	CV501-MT	P50	1.5	501	448	178	195	550	350	CV501-MT	F50	1.5	455	250	178	150				
		P65B			521						F65B			345						
	CV651	P65	1.5	539	627	182	235	550	350	CV651	F65	1.5	474	382	182	170				
		P80		579	703		275				F80			397						
	CVH100	P100C	11	861	1,110	486	335	900	700	CVH100	F100B	11	782	848	486	255				
			15									15								
			22									22								
	CV150	P150	5.5	779	1,094	400	325	900	700	CV150	F150	5.5	713	836	400	260				
			7.5									7.5								
			11									11								
			15									15								
			22									22								
CVS-MT CVS	CVS401T-MT	P40	0.25	457	427	162	175	550	350	CVS401T-MT	F40	0.25	399	229	162	115				
	CVS501T-MT	P50	0.25							CVS501T-MT	F50	0.25								
	CVS501T-MT		0.4							CVS501T-MT		0.4								
	CVS501T-MT		0.75							CVS501T-MT		0.75								
	CVS651-MT	P65	1.5	516	663	192	200	550	350	CVS651-MT	F65	1.5	440	418	192	125				
		P80		556	739		240				F80			433						
	CVS80	P65	2.2	581	697	266	200	550	350	CVS80	F65	2.2	538	452	266	160				
			3.7	622			240					3.7	579							
			2.2	621								2.2	538							
			3.7	662								3.7	579							
	CVS100	P80	5.5	698	803	248	255	700	600	CVS100	F80	5.5	616	509	248	175				
			7.5	733								7.5	651							
			11	814								11	733							
			5.5	698								5.5	616							
	P100	7.5	733	816	248	255	700	600	CVS100	F100	7.5	651	526	248	175					
		11	814								11	733								
		5.5	698								5.5	616								
		7.5	733								7.5	651								
CVC-MT CVC	CVC501	P50	0.25	437	490	204	180	550	350	CVC501	F50	0.25	391	292	204	135				
			0.4									0.4								
			0.75									0.75								
			0.4									0.4								
	CVC651-MT	P65	1.5	587	670	247	235	550	350	CVC651-MT	F65	1.5	526	425	247	175				
		P80		627	746		275				F80			440						
	CVC801	P65	1.5	592	693	253	245	550	350	CVC801	F65	1.5	557	448	253	210				
	CVC801-MT	P65	2.2	614	736	297	250	600	500	CVC801-MT	P65	2.2	578	490	297	215				
		3.7	675	3.7							639									
	CVC801	P80B	1.5	632	769	253	285	550	350	CVC801	F80	1.5	557	463	253	210				
		P80B	2.2	654	812	297	290	600	500		F80	2.2	578	505	297	215				
	CVC801-MT	P100B	3.7	715	825	297	290	600	500	CVC801-MT	F100	3.7	639	523						
		P100B	2.2	654							825	297	290	600			500	F100	2.2	578
	CVM	CVM50	P50	0.4 · 0.75	506	475	188	195	550	350	CVM50	F50	0.4 · 0.75	486	277	188	170			
1.5				601	637	219	245	550	350				1.5	572	392	219	230			
2.2				625	687	238	260						2.2	595	442	238				
3.7				687	696	257	300	550	350				3.7	657	451	257				
CVM65		P65	1.5	641	713	219	285	550	350	CVM65	F65	1.5	572	407	219	230				
			2.2	665	763	238	300					2.2	595	457	238					
			3.7	727	772	257	310	550	350			3.7	657	466	257					
			1.5	659	758	230	300					1.5	572	407	219	230				
CVM80		P80B	2.2	673	769	249	310	550	350	CVM80	F80	2.2	630	462	249					
			3.7	735	777	267	310					3.7	692	471	267					
			5.5	765	830	292	310	550	350			5.5	722	523	292	267				
			7.5	800	841	313	310					7.5	757	534	313					
CVM100		P100C	1.5	659	771	230	300	550	350	CVM100	F100	1.5	573	470	230	260				
			2.2	673	782	249	310					2.2	630	480	249					
			3.7	735	790	267	310	550	350			3.7	692	489	267	265				
			5.5	765	843	292	310					5.5	722	541	292					
CVM150		P150	1.5	659	771	230	300	550	350	CVM150	F150	1.5	573	470	230	260				
			2.2	673	782	249	310					2.2	630	480	249					
			3.7	735	790	267	310	550	350			3.7	692	489	267	265				
			5.5	765	843	292	310					5.5	722	541	292					
	P100C	1.5	659	771	230	300	550	350	CVM100	F100	1.5	573	470	230	260					
		2.2	673	782	249	310					2.2	630	480	249						
		3.7	735	790	267	310	550	350			3.7	692	489	267	265					
		5.5	765	843	292	310					5.5	722	541	292						
	P150	1.5	659	771	230	300	550	350	CVM150	F150	1.5	573	470	230	260					
		2.2	673	782	249	310					2.2	630	480	249						
		3.7	735	790	267	310	550	350			3.7	692	489	267	265					
		5.5	765	843	292	310					5.5	722	541	292						
	P100C	1.5	659	771	230	300	550	350	CVM100	F100	1.5	573	470	230	260					
		2.2	673	782	249	310					2.2	630	480	249						
		3.7	735	790	267	310	550	350			3.7	692	489	267	265					
		5.5	765	843	292	310					5.5	722	541	292						
	P150	1.5	659	771	230	300	550	350	CVM150	F150	1.5	573	470	230	260					
		2.2	673	782	249	310					2.2	630	480	249						
		3.7	735	790	267	310	550	350			3.7	692	489	267	265					
		5.5	765	843	292	310					5.5	722	541	292						
	P100C	1.5	659	771	230	300	550	350	CVM100	F100	1.5	573	470	230	260					
		2.2	673	782	249	310					2.2	630	480	249						
		3.7	735	790	267	310	550	350			3.7	692	489	267	265					
		5.5	765	843	292	310					5.5	722	541	292						
	P150	1.5	659	771	230	300	550	350	CVM150	F150	1.5	573	470	230	260					
		2.2	673	782	249	310					2.2	630	480	249						
		3.7	735	790	267	310	550	350			3.7	692	489	267	265					
		5.5	765	843	292	310					5.5	722	541	292						
	P100C	1.5	659	771	230	300	550	350	CVM100	F100	1.5	573	470	230	260					
		2.2	673	782	249	310					2.2	630	480	249						
		3.7	735	790	267	310	550	350			3.7	692	489	267	265					
		5.5	765	843	292	310					5.5	722	541	292						
	P150	1.5	659	771	230	300	550	350	CVM150	F150	1.5	573	470	230	260					
		2.2	673	782	249	310					2.2	630	480	249						
		3.7	735	790	267	310	550	350			3.7	692	489	267	265					
		5.5	765	843	292	310					5.5	722	541	292						
	P100C	1.5	659	771	230	300	550	350	CVM100	F100	1.5	573	470	230	260					
		2.2	673	782	249	310					2.2	630	480	249						
		3.7	735	790	267	310	550	350			3.7	692	489	267	265					
		5.5	765	843	292	310					5.5	722	541	292						
	P150	1.5	659	771	230	300	550	350	CVM150	F150	1.5	573	470	230	260					
		2.2	673	782	249	310					2.2	630	480	249						
		3.7	735	790	267	310	550	350			3.7	692	489	267	265					
		5.5	765	843	292	310					5.5	722	541	292						
	P100C	1.5	659	771	230	300	550	350	CVM100	F100	1.5	573	470	230	260					
		2.2	673	782	249	310					2.2	630	480	249						
		3.7	735	790	267	310	550	350			3.7	692	489	267	265					
		5.5	765	843	292	310					5.5	722	541	292						
	P150	1.5	659	771	230	300	550	350	CVM150	F150	1.5	573	470	230	260					
		2.2	673	782	249	310					2.2	630	480	249						
		3.7	735	790	267	310	550	350			3.7	692	489	267	265					
		5.5	765	843	292	310					5.5	722	541	292						
	P100C	1.5	659	771	230	300	550	350	CVM100	F100	1.5	573	470	230	260					
		2.2	673	782	249	310					2.2	630	480	249						
		3.7	735	790	267	310	550	350			3.7	692	489	267	265					
		5.5	765	843	292	310					5.5	722	541	292						
	P150	1.5	659	771	230	300	550	350	CVM150	F150	1.5	573	470	230	260					
		2.2	673	782	249	310					2.2	630	480	249						
		3.7	735	790	267	310	550	350			3.7	692	489	267	265					
		5.5	765	843	292	310					5.5	722	541	292						
	P100C	1.5	659	771	230	300	550	350	CVM100	F100	1.5	573	470	230	260					
		2.2	673	782	249	310					2.2	630	480	249						
		3.7	735	790	267	310	550	350			3.7	692	489	267	265					
		5.5	765	843	292	310					5.5	722	541	292						


Sectional View

CV651

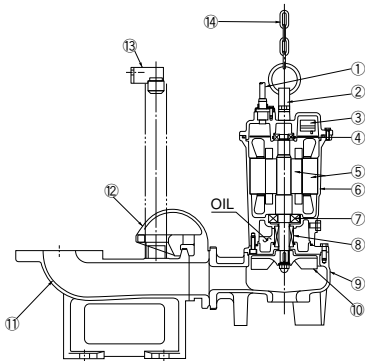

No.	Part Name	Material
1	Cable	PVC insulated PVC sheathed cable
2	Handle	304 stainless steel
3	Thermal protector	—
4	Ball bearing(upper)	—
5	Motor	Shaft:420J2 stainless steel
6	Stator housing	Gray iron casting (FC200)
7	Ball bearing(lower)	—
8	Mechanical seal	—
9	Pump housing	Gray iron casting (FC200)
10	Impeller	Gray iron casting (FC200)
11	Discharge connection	Gray iron casting (FC200)
12	Sliding bracket	Gray iron casting (FC200)
13	Guide holder	304 stainless steel casting
14	Lifting chain	Structural steel

CVC651-MT

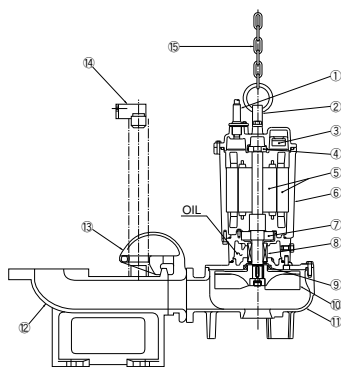

No.	Part Name	Material
1	Cable	PVC insulated PVC sheathed cable
2	Handle	304 stainless steel
3	Thermal protector	—
4	Ball bearing(upper)	—
5	Motor	Shaft:420J2 stainless steel
6	Stator housing	Gray iron casting (FC200)
7	Ball bearing(lower)	—
8	Mechanical seal	—
9	Oil seal	Acrylonitrile butadiene rubber (NBR)
10	Impeller	Gray iron casting (FC250)
11	Pump housing	Gray iron casting (FC250)
12	Discharge connection	Gray iron casting (FC200)
13	Sliding bracket	Gray iron casting (FC200)
14	Guide holder	304 stainless steel casting
15	Lifting chain	Structural steel

Guide rail installation kit

- Discharge connection
- Sliding bracket
- Guide holder(with bolts and nuts)
- Lifting chain (6m)

Discharge mm	Installation kit No.	Pump model				Weight (kg)	
		CV/CVH	CVS	CVC	CVM	Kit	Connection
40	P40	—	CVS401T-MT	—	—	11	4.5
50	P50	CV501(T) CV501-MT	CVS501(T)-MT	CVC501	CVM50	11	4.5
65	P65B	CV501(T) CV501-MT	—	CVC501	—	20	14.5
	P65	CV651	CVS651-MT CVS80	CVC651-MT CVC801-MT CVC801	CVM65	24	15
80	P80	CV651	CVS651-MT CVS80 CVS100	CVC651-MT	CVM65	31.5	20.5
	P80B	—	—	CVC801-MT CVC801 CVC1001-MT	CVM80	31.5	18
100	P100	—	CVS80 CVS100	—	—	40.5	27
	P100B	—	—	CVC801-MT CVC801 CVC1001-MT	CVM80	40.5	27
	P100C	CVH100	—	—	CVM100	55	37
150	P150	CV150	—	—	CVM150	60	42

Free standing kit

- Discharge flange
- Companion flange (with bolts, nuts and gasket)

Discharge mm	Installation kit No.	Pump model				Kit weight (kg)
		CV/CVH	CVS	CVC	CVM	
40	F40	—	CVS401T-MT	—	—	★
50	F50	CV501(T) CV501-MT	CVS501(T)-MT	CVC501	CVM50	★
65	F65B	CV501(T) CV501-MT	—	CVC501	—	5.5
	F65	CV651	CVS651-MT CVS80	CVC651-MT CVC801-MT CVC801	CVM65	7
80	F80	CV651	CVS651-MT CVS80 CVS100	CVC651-MT CVC801-MT CVC801 CVC1001-MT	CVM65 CVM80	9.5
100	F100	—	CVS80 CVS100	CVC801-MT CVC801 CVC1001-MT	CVM80	11
	F100B	CVH100	—	—	CVM100	12
150	F150	CV150	—	—	CVM150	30

★ : Built into the pump

Standard Specifications

Handling liquid	Kind of liquid		Wastewater and sewage or Water including sludge
Material	Cable	0.15 to 7.5kW	PVC insulated PVC sheathed cable
		11 to 22kW	EPR insulated PCP sheathed cable
	Motor shaft		420J2 stainless steel
	Pump housing	CV-MT,CV150, CVS-MT, CVC-MT	Gray iron casting (FC250)
		Other models	Gray iron casting (FC200)
	Impeller	CVM65-80-100-150	Spheroidal graphite iron casting (FCD500)
		CV-MT, CVS-MT, CVC-MT	Gray iron casting (FC250)
Electric motor	Other models		Gray iron casting (FC200)
	Type		Air-filled submersible induction motor
	Insulation class		Class E, Class F(CV-MT, CVS-MT, CVC-MT)
	Enclosure		IP68
Phase		3	

Optional Specifications

Cable extension	Length of cable 15-20-30m		
Material change	Pump series	CV-MT-CV-CVH/ CVS-MT-CVS	CVC-MT-CVC/CVM
	Impeller	304 stainless steel casting	304 stainless steel casting High chromium iron casting
	Suction cover	304 stainless steel (casting)	—
	Lifting chain	304 stainless steel	

Standard Accessories

- Cable (0.15 to 7.5kW) 1pc.
- (11 to 22kW) 3pcs.
- 6m for 0.15 to 0.75kW
- 8m for 1.5 to 22kW


Special Accessories

Liquid Level Regulators - All models are non-mercury structure for earth environment.

LC "Level Switch"



MS "Mini Switch"

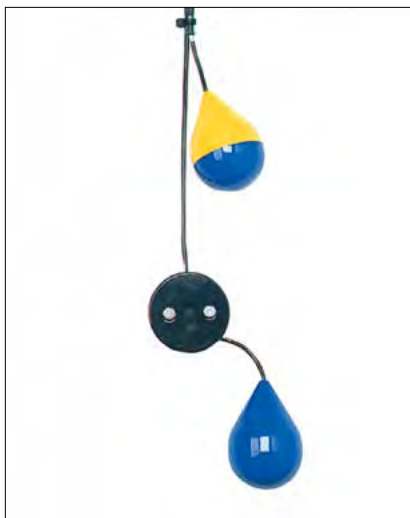

FV "Oval Float"



Features

LC Useful for potable water, wastewater and sewage containing the suspended solids. Hardly affected by corrosion or rust even if it is immersed in a corrosive liquid for a long time.

MS Useful for wastewater and sewage containing a few suspended solids. The MS is available in two types, MS11 (single float) and MS21 (double float).

FV Useful for the fresh water as well as wastewater not containing suspended solids. A single FV is able to control both the upper and lower liquid levels.

Specifications

Model		LC12	MS11, MS21	FV11
Switch		Micro switch	Reed switch	Reed switch
Specific gravity of liquid		0.95~1.15	0.95~1.10	0.95~1.10
Liquid temperature		0~60°C	0~60°C	0~60°C
Voltage		AC/DC30V or under		
Current		5A	0.5A	0.6A
Cable length		6m, 13m, 20m (for further cable extension at an interval of 10m) MAX. length 100m		
Cable type		0.75mm ² ×3 cores, Flat Cable	0.2mm ² ×2 cores×O.D.4.7mm	0.5mm ² ×2 cores×O.D.5.8mm
Weight (including cable)		6m:1.2kg, 13m:1.6kg, 20m:2.0kg	0.6kg (MS11, 6m cable)	Approx. 1.0kg (6m cable)
Material	Case	Polypropylene resin	ABS resin	Polypropylene resin
	Cable	PVC resin (Soft)	PVC resin (Soft)	PVC resin (Soft)
	Others	Chain: 304 stainless steel	Sinker:PVC Resin coating is applied to FC 150	Sinker:The FC200 is coated

Specifications and dimensions are subject to change without notice.

ShinMaywa Industries, Ltd.

Global Sales Dept.
Sales & Marketing Dept., Fluid Div.

3-2-43, Shitte, Tsurumi-ku, Yokohama, 230-0003, Japan
Phone : +81-45-584-1322 Fax : +81-45-575-2286
E-mail : global.pump@shinmaywa.co.jp

ShinMaywa (Asia) Pte. Ltd.

15 Tuas South Street 8, Singapore 637109
Phone : +65-6224-0728
Fax : +65-6224-9678
E-mail : asia.ad@shinmaywa.com.sg

Thai ShinMaywa Co., Ltd.

199 Moo 12, Soi Petchakasem 120, Petchakasem Road,
Om-noi, Krathumban, Samutsakorn 74130 Thailand
Phone : +66-2-420-4712
Fax : +66-2-420-9863
E-mail : tsmc.fluid.sales@shinmaywa.co.jp

ShinMaywa (Shanghai) Trading Co., Ltd.

201107 Building 6, Youleja City, Industrial Park, 333 Lane,
Zhujian Road Minhang, Shanghai, China
Phone : +86-21-5296-2966
Fax : +86-21-5296-2970
E-mail : shanghai@shinmaywa.co.jp

ShinMaywa (America), Ltd.

Headquarters
10737 Gateway West, Suite 240,
El Paso, Texas 79935, U.S.A.
Phone : +1-915-594-9862
Fax : +1-915-594-9866
E-mail : info@shinmaywaamerica.com

North Carolina Branch
6135 Park South Drive, Suite 510
Charlotte, NC, 28210, U.S.A.
Phone : +1-704-945-7112
Fax : +1-704-945-7101
E-mail : pump@shinmaywaamerica.com

URL : <https://www.shinmaywa.co.jp/america/index.html>

<https://www.shinmaywa.co.jp/pump/english/index.html>



Website

ShinMaywa ONO PLANT
ISO 9001-0066539/ISO 14001-0066652

'23. 10 Z-E077L Printed in Japan 14 ㊞