

ShinMaywa

Submersible Ejector

J · JF · JA · JAF



High Performance with Low Power Consumption

ShinMaywa helps to cut initial and running costs.



0.75~5.5kW

For preliminary aeration of purifying tanks

For preliminary aeration of industrial wastewater treatment plants etc.

Submersible Ejector forces sucked air into the tank through an ejector action with a jet of water, thereby stirring the liquid in the tank simultaneously. Since Submersible Ejector offers high performance and low power consumption, it allows you to cut initial and running costs. It can be used effectively for the preliminary aeration of purifying tanks etc. Submersible Ejector is available in two types: the auto-connection type and free-standing type. You can choose either according to your application.



JA372

Major Features

Stirring with a jet of water and tiny air bubbles ensures uniform MLSS concentration in the tank.

Low noise generation.

Since Submersible Ejector can be used in water from 1 to 6 m in depth, limited treatment areas can be effectively covered.

Submersible Ejector has a long life thanks to a vortex type impeller, which allows foreign matter to pass through easily.

Submersible Ejector, especially the automatic connection type, is easy to maintain.

Standard Specifications

Model		Model of Pump Used	Output (kW)	Phase	Rating(50/60Hz)		Number of Poles (P)	Lifting Weight (kg)			Gross Weight (kg)
Auto-Connection	Free-Standing				Air Flow Rate (m³/h)	Water Depth (m)		J-JA	JF-JAF	J-JA	
J7502	JF7502	CVS501	0.75	3-phase	10	2.0	2	24	26	31	
JA152	JAF152	CVC651	1.5		22	3.5	4	52	54	71	
JA222	JAF222	CVC801	2.2		35	3.5	4	65	68	98	
JA372	JAF372	CVC801	3.7		67	4.0	4	77	80	110	
JA552	JAF552	CVC1001	5.5		101	4.0	4	103	106	136	

(Note) The lifting weight of the JF and JAF models does not include the weight of the air suction pipe. The water depth refers to the distance from the center of the diffuser to the surface of the water.

Stirring Capacity

Model	Tank Dimensions			Max. Stirring Capacity (m³)
	Max. Width (m)	Max. Length (m)	Max. Water Depth (m)	
J7502·JF7502	2	3	3.2	19.2
JA152·JAF152	3.5	4	3.9	54.6
JA222·JAF222	4.5	5	4.5	101.3
JA372·JAF372	6	6	5.3	190.8
JA552·JAF552	7	7	6.3	308.7

(Note) The indicated tank dimensions for preliminary aeration are maximum values, assuming a water flow speed of 0.3 m/s or more. The maximum stirring capacity for preliminary aeration is obtained from the max.width × max.length × max.water depth.

Caution

- If you need information regarding the choice of models and the calculation of the number of pumps, please contact ShinMaywa.
- Basically, the operating hours of Submersible Ejector should be 12 hours or less per day or 4,000 hours or less per year. If this limit is anticipated to be exceeded, please consult ShinMaywa.
- In the case of a sludge (thickened) storage tank, the pump life may be shortened due to high sludge density or the nozzle may be clogged with foreign matter. If you wish to use Submersible Ejector for a sludge storage tank, consult ShinMaywa in advance.
- Because Submersible Ejector stirs the liquid in the tank with an upward flow of air bubbles, it cannot perform anaerobic stirring.

Motor Protector Device

Model	Thermal Protector		Leakage Detector
	Auto-Reset type	Manual Reset type	
J7502·JF7502	○	×	×
JA152·JAF152	○	△	▲
JA222·JAF222	○	△	▲
JA372·JAF372	○	△	▲
JA552·JAF552	○	△	▲

○··· It is included as standard equipment.

△··· It is attachable to order (option).

▲··· The electrode type detector is attachable to order (option).

×··· It is not attachable for structural reasons.

Standard Accessories


● Auto-Connection type (J/JA)

- Cable (8 m, 6 m for J7502 only)..... 1
- Lifting chain (6 m, 4 m for J7502 only)..... 1
- Connection..... 1
- Guide holder (with bolts and nuts)..... 1
- Silencer..... 1
- Ball valve (not applicable to J7502) 1

● Free-Standing type (JF/JAF)


- Cable (8 m, 6 m for JF7502 only)..... 1
- Lifting chain (6 m) (not applicable to JF7502)..... 1
- Silencer..... 1
- Ball valve (not applicable to JF7502) 1

■ Component Names and Functions

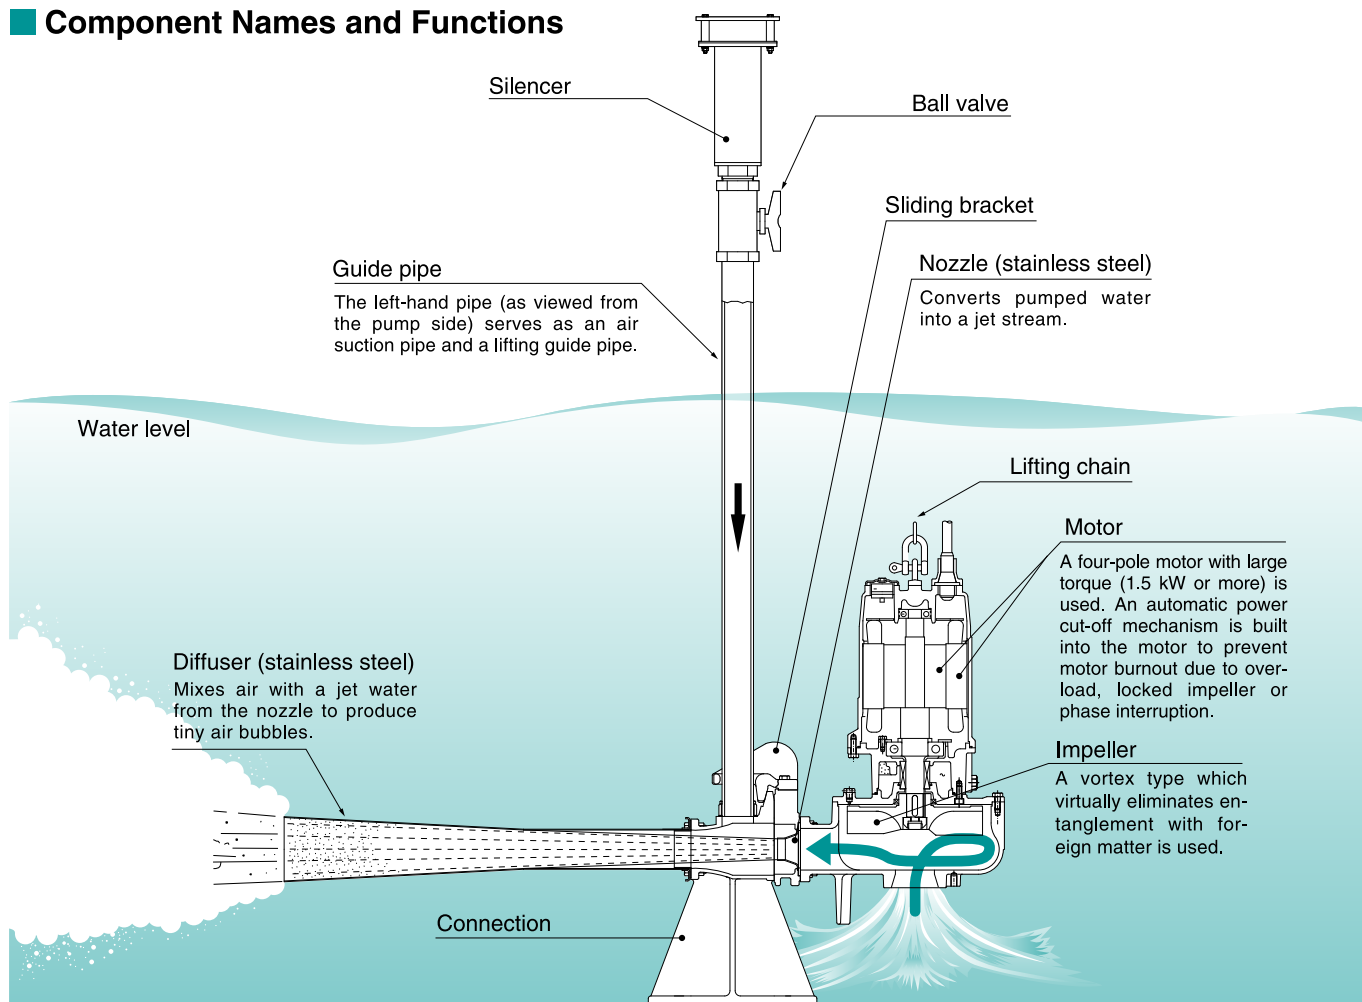

(Note) The diagram given here is for Model JA.

■ Air Suction Performance

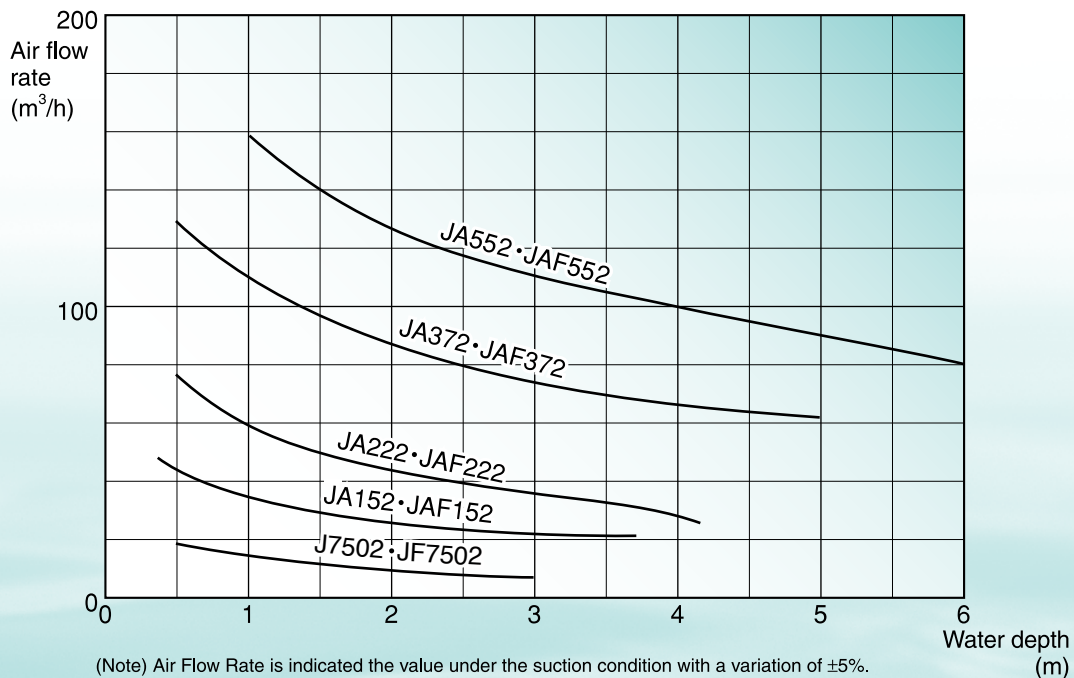


■ Table of Air Flow Rate(m³/h)

Model		Water depth										
Auto-Connection	Free-Standing	1m	1.5m	2m	2.5m	3m	3.5m	4m	4.5m	5m	5.5m	6m
J7502	JF7502	15	12	10	9	8	—	—	—	—	—	—
JA152	JAF152	36	31	27	25	23	22	—	—	—	—	—
JA222	JAF222	60	51	45	40	37	35	29	—	—	—	—
JA372	JAF372	110	98	88	81	75	70	67	64	62	—	—
JA552	JAF552	158	139	127	118	111	105	101	96	91	86	79

(Note) Air Flow Rate is indicated the value under the suction condition with a variation of $\pm 5\%$.

Dimensions


Auto-Connection type

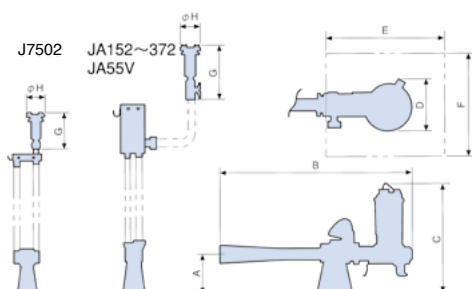

Unit:mm

Model	A	B	C	D	E	F	G	H
J7502	179	701	426	188	550	350	191	89
JA152	225	1,082	652	247			308	114
JA222	300	1,341	750	297	600	500	470	160
JA372			812					
JA552		1,379	858(50Hz) 833(60Hz)	334	700	600		

Free-Standing type



Unit:mm

Model	A	B	C	D	E	F
JF7502	156	691	403	188	191	89
JAF152	99	1,029	526	247	308	114
JAF222	125	1,341	574	297	470	160
JAF372			636			
JAF552	144	1,379	702(50Hz) 677(60Hz)	334		

Packing Size

Unit:mm

Model	Pump Length × Width × Height	Diffuser Length × Width × Height
J7502 JF7502	280 × 225 × 470	180 × 220 × 330
JA152 JAF152	350 × 287 × 610	790 × 290 × 390
JA222	455 × 395 × 670	990 × 430 × 550
JAF222		960 × 290 × 390

Unit:mm

Model	Pump Length × Width × Height	Diffuser Length × Width × Height
JA372	455 × 395 × 730	990 × 430 × 550
JAF372		960 × 290 × 390
JA552	485 × 425 × 805	990 × 430 × 550
JAF552		960 × 290 × 390

Twin Diffuser Type Submersible Aeration Pump

JB・JBF

It keeps stored sewage aerobic to prevent sedimentation of sludge and generation of scum, which causes bad odor.



Guide Rail Type



Free-standing Type

Specifications and dimensions are subject to change without notice.

ShinMaywa Industries, Ltd.

Global Sales Dept.
Sales & Marketing Dept., Fluid Div.

3-2-43, Shitte, Tsurumi-ku, Yokohama, 230-0003, Japan
Phone : +81-45-584-1322 Fax : +81-45-575-2286
E-mail : global.pump@shinmaywa.co.jp

ShinMaywa (Asia) Pte. Ltd.

8 Burn Road, #14-10 Trivex, Singapore 369977
Phone : +65-6224-0728
Fax : +65-6224-9678
E-mail : asia.ad@shinmaywa.com.sg

Thai ShinMaywa Co., Ltd.

199 Moo 12, Soi Petchakasem 120, Petchakasem Road,
Om-noi, Krathumban, Samutsakorn 74130 Thailand
Phone : +66-2-420-4712
Fax : +66-2-420-9863
E-mail : tsmc.fluid.sales@shinmaywa.co.jp

ShinMaywa (Shanghai) Trading Co., Ltd.

201107 Building 6, Youleji City, Industrial Park, 333 Lane,
Zhujian Road Minhang, Shanghai, China
Phone : +86-21-5296-2966
Fax : +86-21-5296-2970
E-mail : shanghai@shinmaywa.co.jp

ShinMaywa (America), Ltd.

Head Quarters
10737 Gateway West, Suite 240,
El Paso, Texas 79935, U.S.A.
Phone : +1-915-594-9862
Fax : +1-915-594-9866
E-mail : info@shinmaywaamerica.com

North Carolina Branch
6135 Park South Drive, Suite 510
Charlotte, NC, 28210, U.S.A.
Phone : +1-704-945-7112
Fax : +1-704-945-7101
E-mail : pump@shinmaywaamerica.com

ShinMaywa ONO PLANT

ISO 9001-0066539/ISO 14001-0066652

URL : <https://www.shinmaywa.co.jp/america/index.html>

<https://www.shinmaywa.co.jp/pump/english/index.html>

'22. 7 Z-E157G Printed in Japan 1.11 ㊞