




凯泉泵业(集团)有限公司



EA/EAD/EAZS

EA系列卧式单级单吸离心泵
EAD系列卧式单级单吸离心泵泵组
EAZS系列卧式直联式离心泵

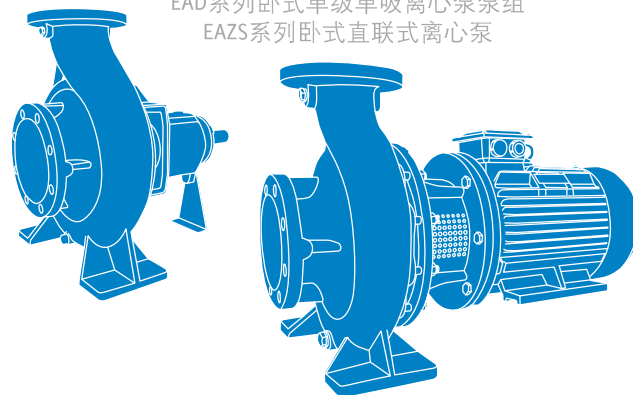

上海凯泉泵业(集团)有限公司

地址：上海市嘉定区曹安公路4255号
集团呼叫中心：400-002-6600
www.kaiquan.com.cn

合肥凯泉电机泵有限公司

地址：合肥市新站区天水路611号(当涂北路与天水路交口)
传真：0551-65458794 咨询电话：0551-65459129
服务热线：0551-65459132



EA系列卧式单级单吸离心泵 产品概述



EA系列型泵是卧式、轴向端吸、径向排出、单级单吸离心泵，泵结构为后开式结构，拆开泵盖和叶轮时不需拆卸吸水和排出管路，悬架内装有两个球轴承（H型结构有一个双列向心推力轴承），泵通过弹性柱销联轴器由电机直接驱动（其他连接和驱动方式可以按照用户具体情况而定）。涡室、底脚、进水法兰和出水法兰铸成一体。

适用于输送清水及物理化学性质类似于水的介质，介质温度-10℃~85℃(105℃)，液体动力黏度系数应小于150cSt（大于20cSt时性能需要修正）；颗粒度小于3mm的悬浮液也可抽吸，但会磨损相关部件，影响泵的寿命。

本泵结构简单，性能可靠，体积小，重量轻，抗汽蚀性能好，能耗低，使用维修方便。

EA系列卧式单级单吸离心泵

1、主要技术参数

型号表示方法：

例：EA



泵口径：吸入口50~350，排出口32~300
流量：最大流量400l/s
扬程：最大扬程150m
泵体承压：标准16MPa,可选24 MPa
工作压力：标准10MPa,可选16 MPa

示例：排出口直径是40mm，叶轮公称直径是16cm的EA系列水泵，其型号表示为：EA40/16。

全系列有多个规格的产品。提供不同直径，不同转速的性能选择。

产品标准：BS EN733/DIN24255

法兰标准：DIN2501 PN16，GB/T17241.6 PN16 (泵体法兰可选其他同等级标准法兰，如ANSI、JIS等)


泵的转向：从驱动端看为顺时针旋转，从水泵进口看逆时针旋转。

2、主要零件材料

零件名称	标准材质	可选材质
泵体	灰铸铁	球墨铸铁、304/316不锈钢
叶轮	黄铜	灰铸铁、球墨铸铁、青铜、304/316不锈钢
密封环	灰铸铁	球墨铸铁、青铜、304/316不锈钢
轴	2Cr13不锈钢	45#钢、304/316不锈钢
轴套	2Cr13不锈钢	45#钢、304/316不锈钢
轴封	机械密封	填料密封

End Suction Centrifugal Pumps

EA SERIES

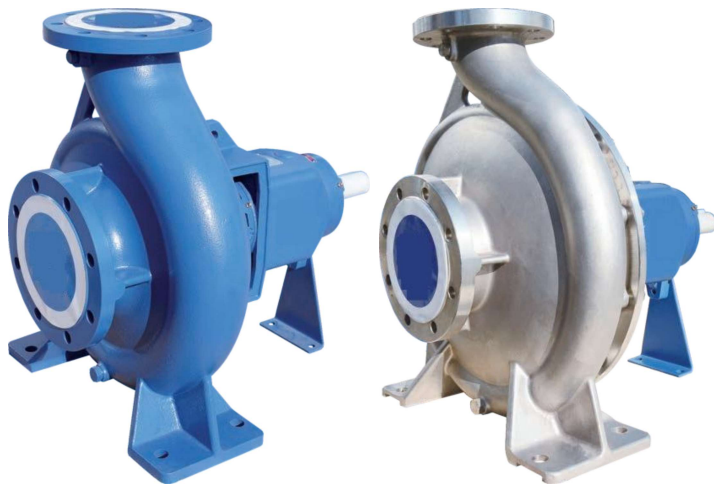

3、泵的结构特点

泵的外形与安装尺寸、设计制造和验收规范符合BS EN733、DIN24255和ISO9908国际标准，与其他符合该标准的泵产品具有通用互换性。


泵体——采用高效能的蜗壳形式，其法兰连接尺寸标准：GB/T17241.6 PN1.6-1998（铸铁），GB/T9113.1-2000（钢）PN1.6MPa（16bar）可与下列标准同级法兰配合使用：BS4504、DIN2533、ISO7005.1、ISO7005.2；

叶轮——闭式叶轮；采用优秀的水力模型设计；

轴——加大尺寸的泵轴使泵的运行更为可靠；

轴封——采用机械密封和填料密封两种密封形式；

轴承——轴承润滑方式有脂润滑和油润滑两种形式，工作环境温度较高，载荷较大时宜用油润滑。

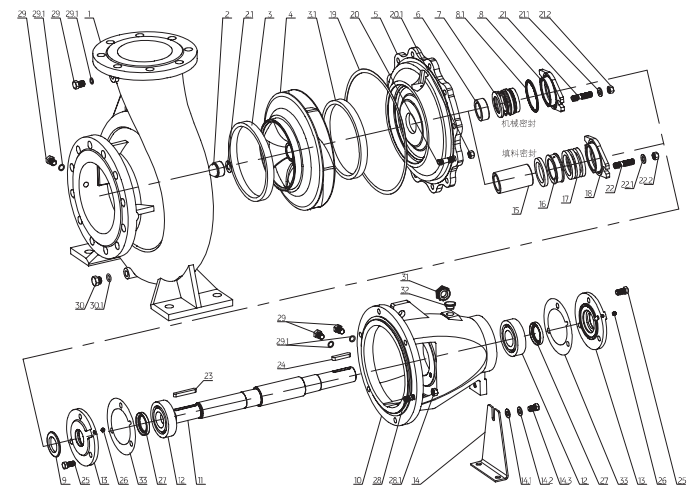

序号	名称	序号	名称	序号	名称	序号	名称
1	泵体	10	悬架	20	螺栓	28	螺栓
2	叶轮螺母	11	轴	20.1	螺母	28.1	螺母
2.1	止动垫片	12	轴承	21	螺栓	29	管堵
3	密封环	13	轴承盖	21.1	平垫圈	29.1	O型圈
3.1	密封环	14	泵支架	21.2	螺母		管堵垫片
4	叶轮	14.1	平垫圈	22	螺栓	30	管堵
5	泵盖	14.2	弹性垫圈	22.1	平垫圈	30.1	O型圈
6	轴套	14.3	螺栓	22.2	螺母		管堵垫片
7	B1A机械密封	15	填料轴套	23	键	31	油标
	MG1机械密封	16	填料环	24	键	32	油孔盖
	M3N机械密封		轴承套	25	螺栓	33	轴承盖垫
8	密封压盖	17	填料	26	油杯M6		
8.1	O型密封圈	18	填料压盖	27	油毛毡		
9	挡水圈	19	泵盖垫		骨架油封		

A blue industrial centrifugal pump assembly. It features a blue cast-iron pump housing with a large circular inlet/outlet flange on the left. The pump is connected to a blue electric motor with a ribbed cooling fan and a terminal box on top. The entire unit is mounted on a sturdy blue metal base.



EA系列卧式单级单吸离心泵 性能参数表

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		电机型号	效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	Motor Model	%	mm	m
EA32/13	9.0	2.50	26.0	2900	1.23	1.5	Y2-90L-2 2.2KW	52	139	1.4
	15.0	4.17	24.0		1.61	2.2		61		1.7
	18.0	5.00	22.5		1.78	2.2		62		2.5
EA32/13 A	8.4	2.34	22.0		0.98	1.5	Y2-90L-2 2.2KW	51.5	130	1.4
	14.0	3.90	19.7		1.25	1.5		60		1.7
	16.8	4.68	18.0		1.36	2.2		60.5		2.5
EA32/13 B	7.8	2.16	18.0		0.75	1.1	Y2-90S-2 1.5KW	51	120	1.4
	13.0	3.60	16.2		0.98	1.1		58.5		1.7
	15.6	4.32	14.5		1.06	1.5		58		2.5
EA32/13 C	7.1	1.98	14.8		0.57	1.1	Y2-802-2 1.1KW	50	110	1.4
	11.9	3.30	13.0		0.74	1.1		57		1.7
	14.3	3.96	11.4		0.80	1.1		55.5		2.5
EA32/13 D	6.5	1.80	11.7		0.43	0.75	Y2-802-2 1.1KW	48	100	1.4
	10.8	3.00	10.1		0.57	0.75		52		1.7
	13.0	3.60	8.7		0.59	1.1		52		2.5
EA32/16	10.8	3.00	42.0	2.66	3	Y2-132S1-2 5.5KW	46.5	174	1.9	
	18.0	5.00	39.0	3.41	4		56		2.2	
	21.6	6.00	36.5	3.79	5.5		56.7		3.7	
EA32/16 A	10.2	2.84	37.0	2.27	3	Y2-112M-2 4KW	45.5	165	1.9	
	17.1	4.74	34.6	2.90	3		55.5		2.2	
	20.5	5.69	32.1	3.18	4		56.3		3.7	
EA32/16 B	9.6	2.67	32.3	1.92	3	Y2-112M-2 4KW	44	155	1.9	
	16.0	4.45	30.5	2.44	3		54.5		2.2	
	19.2	5.34	28.7	2.68	4		56		3.7	
EA32/16 C	9.0	2.50	28.3	1.61	2.2	Y2-100L-2 3KW	43	145	1.9	
	15.0	4.17	26.5	2.04	3		53		2.2	
	18.0	5.00	25.0	2.25	3		54.5		3.7	
EA32/16 D	8.4	2.33	24.6	1.40	2.2	Y2-90L-2 2.2KW	40	135	1.9	
	14.0	3.88	22.7	1.69	2.2		51		2.2	
	16.8	4.66	21.4	1.86	2.2		52.5		3.7	
EA32/16 E	7.8	2.16	20.5	1.11	1.1	Y2-90L-2 2.2KW	39	125	1.9	
	12.9	3.59	19.2	1.39	2.2		48.5		2.2	
	15.5	4.31	18.0	1.49	2.2		51		3.7	
EA32/20	10.8	3.00	64.2	4.84	5.5	Y2-160M1-2 11KW	39	214	1.7	
	18.0	5.00	58.5	5.92	7.5		48.4		2	
	21.6	6.00	54.1	6.59	11		48.3		2.3	
EA32/20 A	10.3	2.87	58.3	4.25	5.5	Y2-132S2-2 7.5KW	38.6	205	1.6	
	17.2	4.79	53.0	5.16	7.5		48.2		1.95	
	20.7	5.75	48.3	5.66	7.5		48.1		2.2	
EA32/20 B	9.8	2.73	52.2	3.62	5.5	Y2-132S2-2 7.5KW	38.6	195	1.6	
	16.4	4.56	47.7	4.48	7.5		47.5		1.95	
	19.7	5.47	43.2	4.92	7.5		47		2.2	
EA32/20 C	9.3	2.59	47.2	3.24	4	Y2-132S1-2 5.5KW	37	185	1.6	
	15.6	4.32	42.5	3.87	5.5		46.5		1.95	
	18.7	5.19	38.2	4.22	5.5		46		2.2	
EA32/20 D	8.8	2.45	42.2	2.82	4	Y2-132S1-2 5.5KW	36	175	1.6	
	14.7	4.09	38.0	3.39	5.5		45		1.95	
	17.7	4.91	34.2	3.72	5.5		44.2		2.2	
EA32/20 E	8.3	2.31	37.5	2.40	2.2	Y2-112M-2 4KW	35.5	165	1.6	
	13.9	3.86	33.8	2.97	4		43		1.95	
	16.7	4.63	30.4	3.17	4		43.4		2.2	
EA32/26	16.2	4.50	89.3	11.76	15	Y2-160L-2 18.5KW	33.5	264	2.1	
	27.0	7.50	82.0	14.52	18.5		41.5		2.6	
	32.4	9.00	75.3	16.28	18.5		40.8		3.1	
EA32/26 A	15.6	4.35	83.6	10.79	15	Y2-160L-2 18.5KW	33	255	2.1	
	26.1	7.24	76.0	13.39	15		40.3		2.6	
	31.3	8.69	70.5	14.83	18.5		40.5		3.1	

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		电机型号	效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	Motor Model	%	mm	m
EA32/26 B	15.0	4.18	77.5	2900	10.23	15	Y2-160M2-2 15KW	31	245	2.1
	25.1	6.96	70.2		12.12	15		39.5		2.6
	30.1	8.35	65.0		13.23	15		40.2		3.1
EA32/26 C	14.4	4.01	72.0		9.12	15	Y2-160M2-2 15KW	31	235	2.1
	24.0	6.68	65.0		10.90	15		39		2.6
	28.8	8.01	59.8		11.74	15		40		3.1
EA32/26 D	13.8	3.84	66.0		8.13	11	Y2-160M2-2 15KW	30.5	225	2.1
	23.0	6.39	59.6		9.95	15		37.5		2.6
	27.6	7.67	54.8		10.84	15		38		3.1
EA32/26 E	13.2	3.66	60.8		7.28	11	Y2-160M1-2 11KW	30	215	2.1
	22.0	6.11	55.0		9.09	11		36.2		2.6
	26.4	7.33	51.0		9.90	11		37		3.1
EA32/26 F	12.6	3.49	58.0		6.97	11	Y2-160M1-2 11KW	28.5	205	2.1
	21.0	5.82	50.8		8.40	11		34.5		2.6
	25.2	6.99	46.2		9.04	11		35		3.1
EA40/13	18.0	5.00	25.3	2900	2.03	2.2	Y2-112M-2 4KW	61	139	1.8
	30.0	8.33	23.5		2.63	3		73		2
	36.0	10.00	21.8		2.91	4		73.5		3
EA40/13 A	16.8	4.67	22.0		1.63	2.2	Y2-100L-2 3KW	62	130	1.8
	28.0	7.79	20.2		2.11	3		73.2		2
	33.7	9.35	18.5		2.32	3		73.2		3
EA40/13 B	15.5	4.31	18.5		1.28	1.5	Y2-90L-2 2.2KW	61	120	1.8
	25.9	7.19	17.0		1.64	2.2		73		2
	31.1	8.63	15.3		1.77	2.2		73		3
EA40/13 C	14.2	3.96	15.5		1.00	1.5	Y2-90L-2 2.2KW	60	110	1.8
	23.7	6.59	13.7		1.23	1.5		72		2
	28.5	7.91	12.2		1.31	2.2		72		3
EA40/13 D	12.9	3.60	12.5		0.76	1.1	Y2-90L-2 1.5KW	58	100	1.8
	21.6	5.99	11.0		0.92	1.5		70		2
	25.9	7.19	9.5		0.97	1.5		69		3
EA40/16	18.0	5.00	39.5	2900	3.39	5.5	Y2-132S2-2 7.5KW	57	174	1.5
	30.0	8.33	35.0		4.46	5.5		64		2.2
	36.0	10.00	31.5		5.02	7.5		61.5		3.3
EA40/16 A	17.1	4.74	34.8		2.89	4	Y2-132S1-2 5.5KW	56	165	1.5
	28.4	7.90	30.5		3.74	5.5		63.2		2.2
	34.1	9.48	27.6		4.20	5.5		61		3.3
EA40/16 B	16.0	4.45	30.5		2.42	4	Y2-112M-2 4KW	55	155	1.5
	26.7	7.42	26.5		3.15	4		61.2		2.2
	32.1	8.90	23.4		3.46	4		59		3.3
EA40/16 C	15.0	4.17	26.7		2.06	3	Y2-112M-2 4KW	53	145	1.5
	25.0	6.94	22.5		2.62	4		58.5		2.2
	30.0	8.33	19.5		2.84	4		56		3.3
EA40/16 D	14.0	3.88	23.1		1.76	3	Y2-100L-2 3KW	50	135	1.5
	23.3	6.46	19.5		2.17	3		57		2.2
	27.9	7.76	16.5		2.28	3		55		3.3
EA40/16 E	12.9	3.59	19.5	2900	1.43	3	Y2-100L-2 3KW	48	125	1.5
	21.5	5.98	16.0		1.71	3		55		2.2
	25.9	7.18	13.5		1.86	3		51		3.3
EA40/20	18.0	5.00	61.5		6.28	7.5	Y2-160M1-2 11KW	48	214	1.8
	30.0	8.33	56.5		7.95	11		58		2
	36.0	10.00	53.0		8.88	11		58.5		2.7
EA40/20 A	17.2	4.79	55.4		5.42	7.5	Y2-160M1-2 11KW	48	205	1.8
	28.7	7.98	51.0		6.94	11		57.5		2
	34.5	9.58	47.3		7.65	11		58		2.7
EA40/20 B	16.4	4.55	49.5		4.70	5.5	Y2-160M1-2 11KW	47	195	1.8
	27.3	7.59	47.5		6.25	7.5		56.5		2
	32.8	9.11	42.0		6.58	11		57		2.7

EA系列卧式单级单吸离心泵 性能参数表

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		电机型号	效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	Motor Model	%	mm	m
EA40/20 C	15.6	4.32	44.6	2900	4.10	7.5	Y2-132S2-2 7.5KW	46	185	1.8
	25.9	7.20	40.5		5.15	7.5		55.5		2
	31.1	8.64	36.5		5.62	7.5		55		2.7
EA40/20 D	14.7	4.09	39.9		3.55	5.5	Y2-132S2-2 7.5KW	45	175	1.8
	24.5	6.81	36.0		4.45	7.5		54		2
	29.4	8.17	32.2		4.82	7.5		53.5		2.7
EA40/20 E	13.9	3.85	35.4		3.01	5.5	Y2-132S1-2 5.5KW	44.5	165	1.8
	23.1	6.42	31.5		3.81	5.5		52		2
	27.7	7.71	28.2		4.14	5.5		51.5		2.7
EA40/26	21.6	6.00	93.0		13.67	15	Y2-180M-2 22KW	40	264	1.8
	36.0	10.00	86.5		16.62	18.5		51		2
	43.2	12.00	81.5		18.08	22		53		2.5
EA40/26 A	20.9	5.80	86.0		12.21	15	Y2-160L-2 18.5KW	40	255	1.8
	34.8	9.66	80.0		15.06	18.5		50.3		2
	41.7	11.59	74.5		16.18	18.5		52.3		2.5
EA40/26 B	20.0	5.57	78.3		10.96	15	Y2-160L-2 18.5KW	39	245	1.8
	33.4	9.28	72.0		13.10	15		50		2.0
	40.1	11.14	66.0		14.12	18.5		51		2.5
EA40/26 C	19.2	5.34	71.0	2900	9.78	15	Y2-160M2-2 15KW	38	235	1.8
	32.0	8.90	66.2		11.91	15		48.5		2
	38.5	10.68	60.7		12.71	15		50		2.5
EA40/26 D	18.4	5.11	65.1		8.58	11	Y2-160M2-2 15KW	38	225	1.8
	30.7	8.52	60.2		10.48	15		48		2
	36.8	10.23	55.7		11.50	15		48.5		2.5
EA40/26 E	17.6	4.89	59.4		7.59	11	Y2-160M2-2 15KW	37.5	215	1.8
	29.3	8.14	54.3		9.22	11		47		2
	35.2	9.77	50.8		10.25	15		47.5		2.5
EA40/26 F	16.8	4.66	54.0		6.57	11	Y2-160M1-2 11KW	37.5	205	1.8
	28.0	7.77	49.5		8.19	11		46		2
	33.5	9.32	45.5		8.94	11		46.5		2.5
EA40/32G EA40/32H	21.6	6.00	155.0	2900	27.21	30	Y2-225M-2 45KW	33.5	329	2.7
	36.0	10.00	148.0		34.13	37		42.5		3.2
	43.2	12.00	140.0		37.42	45		44		4.8
EA40/32GA EA40/32HA	20.7	5.74	139.0		24.45	30	Y2-200L2-2 37KW	32	315	2.7
	34.5	9.57	133.0		30.07	37		41.5		3.2
	41.4	11.49	126.0		32.84	37		43.2		4.8
EA40/32GB EA40/32HB	19.7	5.47	124.5		21.53	30	Y2-200L2-2 37KW	31	300	2.7
	32.8	9.12	118.0		26.04	30		40.5		3.2
	39.4	10.94	114.0		29.11	37		42		4.8
EA40/32GC EA40/32HC	18.7	5.20	111.0		18.85	22	Y2-200L1-2 30KW	30	285	2.7
	31.2	8.66	107.0		23.00	30		39.5		3.2
	37.4	10.40	100.0		25.47	30		40		4.8
EA40/32GD EA40/32HD	17.7	4.92	99.0		17.06	22	Y2-200L1-2 30KW	28	270	2.7
	29.5	8.21	95.0		19.59	30		39		3.2
	35.5	9.85	88.0		21.78	30		39		4.8
EA40/32GE EA40/32HE	16.7	4.65	88.0	2900	14.58	18.5	Y2-180M-2 22KW	27.5	255	2.7
	27.9	7.75	81.5		16.96	22		36.5		3.2
	33.5	9.30	75.0		17.99	22		38		4.8
EA50/13	36.0	10.00	26.0		3.89	5.5	Y2-132S2-2 7.5KW	65.5	139	1.95
	60.0	16.67	23.0		4.82	7.5		78		2.5
	72.0	20.00	20.5		5.36	7.5		75		3.3
EA50/13 A	33.7	9.35	22.0		3.13	4	Y2-132S1-2 5.5KW	64.5	130	1.95
	56.1	15.59	18.6		3.79	5.5		75		2.5
	67.4	18.71	16.1		4.10	5.5		72		3.3
EA50/13 B	31.1	8.63	18.3		2.46	4	Y2-132S1-2 4KW	63	120	1.95
	51.8	14.39	15.0		2.94	4		72		2.5
	62.2	17.27	12.3		3.06	4		68		3.3

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		电机型号	效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	Motor Model	%	mm	m
EA50/13 C	28.5	7.92	15.0	2900	1.88	3	Y2-100L-2 3KW	62	110	1.95
	47.5	13.19	11.6		2.17	3		69		2.5
	57.0	15.83	9.6		2.31	3		64.5		3.3
EA50/16	39.0	10.83	42.3		6.96	11	Y2-160M1-2 11KW	64.5	174	1.8
	65.0	18.05	38.0		8.96	11		75		2.8
	78.0	21.66	33.8		10.11	11		71		3.2
EA50/16 A	37.0	10.27	37.5		5.99	7.5	Y2-160M1-2 11KW	63	165	1.8
	61.6	17.12	33.2		7.68	11		72.5		2.8
	73.9	20.54	29.5		8.73	11		68		3.2
EA50/16 B	34.7	9.65	33.3	2900	5.25	7.5	Y2-160M1-2 11KW	60	155	1.8
	57.9	16.08	29.2		6.67	11		69		2.8
	69.5	19.29	25.8		7.28	11		67		3.2
EA50/16 C	32.5	9.03	28.7		4.30	5.5	Y2-132S2-2 7.5KW	59	145	1.8
	54.2	15.04	25.0		5.46	7.5		67.5		2.8
	65.0	18.05	22.1		6.01	7.5		65		3.2
EA50/16 D	30.2	8.40	24.5		3.48	5.5	Y2-132S2-2 7.5KW	58	135	1.8
	50.4	14.00	20.8		4.46	5.5		64		2.8
	60.5	16.81	18.3		4.86	7.5		62		3.2
EA50/16 E	28.0	7.78	20.5		2.95	4	Y2-132S1-2 5.5KW	53	125	1.8
	46.7	12.97	16.8		3.44	5.5		62		2.8
	56.0	15.56	14.2		3.64	5.5		59.5		3.2
EA50/20	36.0	10.00	62.0	10.48	15	Y2-160L-2 18.5	58	214	2.2	
	60.0	16.67	56.0	13.07	15		70		3.2	
	72.0	20.00	51.0	14.70	18.5		68		4	
EA50/20 A	34.5	9.58	56.3	2900	8.81	11	Y2-160M2-2 15KW	60	205	2.2
	57.5	15.97	50.3		11.53	15		68.3		3.2
	69.0	19.16	44.7		12.82	15		65.5		4
EA50/20 B	32.8	9.11	51.3		7.77	11	Y2-160M2-2 15KW	59	195	2.2
	54.7	15.19	44.7		10.01	15		66.5		3.2
	65.6	18.23	40.0		11.16	15		64		4
EA50/20 C	31.1	8.65	46.2		6.75	11	Y2-160M1-2 11KW	58	185	2.2
	51.9	14.41	40.2		8.67	11		65.5		3.2
	62.3	17.29	35.4		9.68	11		62		4
EA50/20 D	29.4	8.18	41.3		5.86	7.5	Y2-160M1-2 11KW	56.5	175	2.2
	49.1	13.63	36.2		7.56	7.5		64		3.2
	58.9	16.36	31.4		8.60	11		58.5		4
EA50/20 E	27.8	7.71	36.7		5.14	7.5	Y2-132S2-2 7.5KW	54	165	2.2
	46.3	12.85	32.2		6.76	7.5		60		3.2
	55.5	15.42	27.5		7.42	7.5		56		4
EA50/26H	39.0	10.83	97.5	2900	20.29	30	Y2-200L2-2 37KW	51	264	1.7
	65.0	18.05	91.5		26.32	30		61.5		2.5
	78.0	21.66	87.0		29.31	37		63		3.2
EA50/26H A	37.7	10.46	90.5		18.19	22	Y2-200L1-2 30KW	51	255	1.7
	62.8	17.43	84.0		23.53	30		61		2.5
	75.3	20.92	79.5		26.29	30		62		3.2
EA50/26H B	36.2	10.05	84.0		16.55	18.5	Y2-200L1-2 30KW	50	245	1.7
	60.3	16.75	78.0		21.34	30		60		2.5
	72.4	20.10	73.0		23.57	30		61		3.2
EA50/26 C	34.7	9.64	77.5		14.79	18.5	Y2-200L1-2 30KW	49.5	235	1.7
	57.8	16.07	71.0		18.95	22		59		2.5
	69.4	19.28	66.0		20.78	30		60		3.2
EA50/26 D	33.2	9.23	71.0		13.10	15	Y2-180M-2 22KW	49	225	1.7
	55.4	15.38	65.0		17.05	22		57.5		2.5
	66.5	18.46	60.5		18.54	22		59		3.2
EA50/26 E	31.8	8.82	65.0	2900	11.70	15	Y2-160L-2 18.5KW	48	215	1.7
	52.9	14.70	59.4		15.14	18.5		56.5		2.5
	63.5	17.64	55.2		16.60	18.5		57.5		3.2

EA系列卧式单级单吸离心泵 性能参数表

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		电机型号 Motor Model	效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	%	mm	m	
EA50/26 F	30.3	8.41	59.0	2900	10.35	15	Y2-160L-2 18.5KW	47	205	1.7
	50.5	14.02	53.5		13.36	18.5		55		2.5
	60.5	16.82	49.8		14.66	18.5		56		3.2
EA50/32G EA50/32H	54.0	15.00	151.5	2900	41.63	45	Y2-280S-2 75KW	53.5	329	2.8
	90.0	25.00	136.0		54.62	55		61		4.5
	108.0	30.00	124.0		62.86	75		58		7
EA50/32G EA50/32H A	51.7	14.36	139.0		37.26	45	Y2-280S-2 75KW	52.5	315	2.8
	86.2	23.94	125.0		48.71	55		60.2		4.5
	103.4	28.72	113.5		54.61	75		58.5		7
EA50/32G EA50/32H B	49.2	13.68	126.0		32.79	37	Y2-250M-2 55KW	51.5	300	2.8
	82.1	22.80	113.0		42.79	45		59		4.5
	98.5	27.36	102.5		47.79	55		57.5		7
EA50/32G EA50/32H C	46.8	12.99	114.0		28.75	30	Y2-225M-2 45KW	50.5	285	2.8
	78.0	21.66	101.0		36.96	37		58		4.5
	93.6	25.99	92.0		41.47	45		56.5		7
EA50/32G EA50/32H D	44.3	12.31	101.5		24.99	30	Y2-225M-2 45KW	49	270	2.8
	73.9	20.52	90.5		32.21	37		56.5		4.5
	88.6	24.62	82.0		35.33	45		56		7
EA50/32G EA50/32H E	41.9	11.63	90.5		21.26	22	Y2-200L2-2 37KW	48.5	255	2.8
	69.8	19.38	80.0		27.62	30		55		4.5
	83.7	23.25	72.5		30.31	37		54.5		7
EA65/13	60.0	16.67	24.5	2900	5.89	7.5	Y2-160M1-2 11KW	68	139	3
	100.0	27.78	20.5		7.06	11		79		3.75
	120.0	33.34	17.2		7.39	11		76		4.2
EA65/13 A	56.1	15.59	20.6		4.63	7.5	Y2-132S2-2 7.5KW	68	130	3
	93.5	25.98	16.2		5.38	7.5		76.6		3.75
	112.2	31.18	13.0		5.59	7.5		71		4.2
EA65/13 B	51.8	14.39	17.2		3.68	5.5	Y2-132S1-2 5.5KW	66	120	3
	86.3	23.98	13.2		4.25	5.5		73		3.75
	103.6	28.78	10.2		4.29	5.5		67		4.2
EA65/16	60.0	16.67	39.7		9.83	15	Y2-160M2-2 15KW	66	174	2.7
	100.0	27.78	34.0		12.34	15		75		3.5
	120.0	33.34	29.6		13.16	15		73.5		4.1
EA65/16 A	56.9	15.81	36.0		8.32	11	Y2-160M2-2 15KW	67	165	2.7
	94.8	26.34	30.0		10.47	15		74		3.5
	113.8	31.61	25.8		11.02	15		72.5		4.1
EA65/16 B	53.5	14.85	32.0	2900	7.16	11	Y2-160M1-2 11KW	65	155	2.7
	89.1	24.75	26.2		8.75	11		72.6		3.5
	106.9	29.70	21.8		9.06	11		70		4.1
EA65/16 C	50.0	13.89	28.0		6.05	7.5	Y2-160M1-2 11KW	63	145	2.7
	83.3	23.15	22.2		7.09	11		71		3.5
	100.0	27.78	18.2		7.23	11		68.5		4.1
EA65/16 D	46.6	12.93	24.2		5.03	7.5	Y2-132S2-2 7.5KW	61	135	2.7
	77.6	21.55	19.2		5.89	7.5		69		3.5
	93.1	25.86	15.5		6.04	7.5		65		4.1
EA65/16 E	43.1	11.97	20.7		4.06	5.5	Y2-132S1-2 5.5KW	60	125	2.7
	71.8	19.96	16.0		4.67	5.5		67		3.5
	86.2	23.95	12.8		4.77	5.5		63		4.1
EA65/20	66.0	18.33	64.2	2900	19.55	22	Y2-200L1-2 30KW	59	214	2.4
	110.0	30.55	56.5		23.08	30		73.3		3.7
	132.0	36.66	52.0		25.52	30		73.2		5.2
EA65/20 A	63.2	17.56	58.2		16.15	18.5	Y2-200L1-2 30KW	62	205	2.4
	105.4	29.27	50.5		19.84	30		73		3.7
	126.4	35.12	45.6		21.65	30		72.5		5.2
EA65/20 B	60.1	16.70	52.9		14.43	18.5	Y2-180M-2 22KW	60	195	2.4
	100.2	27.84	46.0		17.31	22		72.5		3.7
	120.3	33.41	41.4		18.82	22		72		5.2

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		电机型号	效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	Motor Model	%	mm	m
EA65/20 C	57.0	15.85	47.6	2900	12.32	15	Y2-180M-2 22KW	60	185	2.4
	95.1	26.41	41.4		14.88	22		72		3.7
	114.1	31.69	37.3		16.19	22		71.5		5.2
EA65/20 D	54.0	14.99	42.0		10.46	15	Y2-160L-2 18.5KW	59	175	2.4
	89.9	24.98	36.6		12.62	18.5		71		3.7
	107.9	29.98	32.7		13.63	18.5		70.5		5.2
EA65/20 E	50.9	14.13	36.8		8.94	11	Y2-160M2-2 15KW	57	165	2.4
	84.8	23.55	32.0		10.55	15		70		3.7
	101.8	28.27	28.0		11.41	15		68		5.2
EA65/26	72.0	20.00	98.0		30.49	37	Y2-250M-2 55KW	63	264	2.4
	120.0	33.33	89.9		39.95	45		73.5		4.2
	144.0	40.00	82.3		45.12	55		71.5		5.8
EA65/26 A	69.5	19.32	91.0	27.78	37	Y2-225M-2 45KW	62	255	2.4	
	115.9	32.19	83.0	35.87	45		73		4.2	
	139.1	38.63	76.0	40.53	45		71		5.8	
EA65/26 B	66.8	18.56	84.5	25.19	30	Y2-225M-2 45KW	61	245	2.4	
	111.4	30.93	77.0	32.19	37		72.5		4.2	
	133.6	37.12	70.0	35.86	45		71		5.8	
EA65/26 C	64.1	17.80	78.5	23.21	30	Y2-200L2-2 37KW	59	235	2.4	
	106.8	29.67	71.0	28.87	37		71.5		4.2	
	128.2	35.60	64.0	31.67	37		70.5		5.8	
EA65/26 D	61.4	17.04	72.5	20.88	30	Y2-200L2-2 37KW	58	225	2.4	
	102.3	28.41	65.0	25.63	30		70.6		4.2	
	122.7	34.09	59.0	28.16	37		70		5.8	
EA65/26 E	58.6	16.29	66.2	18.38	22	Y2-200L1-2 30KW	57.5	215	2.4	
	97.7	27.14	59.4	23.05	30		68.5		4.2	
	117.3	32.57	50.8	24.95	30		65		5.8	
EA65/26 F	55.9	15.53	59.0	16.32	22	Y2-200L1-2 30KW	55	205	2.4	
	93.2	25.88	52.6	20.37	30		65.5		4.2	
	111.8	31.06	48.0	22.48	30		65		5.8	
EA65/32G	78.0	21.66	143.5	56.41	75	Y2-280M-2 90KW	54	329	3.1	
EA65/32H	130.0	36.10	133.5	74.14	90		63.7		4.8	
EA65/32H	156.0	43.32	124.0	82.25	90		64		6.8	
EA65/32G	74.7	20.74	131.0	49.76	55	Y2-280M-2 90KW	53.5	315	3.1	
EA65/32H	124.4	34.56	119.0	63.68	75		63.3		4.8	
EA65/32H	149.3	41.48	110.0	70.63	90		63.3		6.8	
EA65/32G	71.1	19.75	117.0	43.97	55	Y2-280S-2 75KW	51.5	300	3.1	
EA65/32G	118.5	32.92	105.0	54.20	75		62.5		4.8	
EA65/32H	142.2	39.50	95.3	59.50	75		62		6.8	
EA65/32G	67.5	18.76	104.0	37.50	45	Y2-280S-2 75KW	51	285	3.1	
EA65/32H	112.6	31.27	92.0	46.22	55		61		4.8	
EA65/32H	135.1	37.53	82.6	50.63	75		60		6.8	
EA65/32G	64.0	17.78	94.2	32.82	45	Y2-250M-2 55KW	50	270	3.1	
EA65/32H	106.7	29.63	82.0	39.68	55		60		4.8	
EA65/32H	128.0	35.55	71.7	43.44	55		57.5		6.8	
EA65/32G	60.4	16.79	83.0	27.87	37	Y2-225M-2 45KW	49	255	3.1	
EA65/32H	100.7	27.98	72.3	35.72	37		55.5		4.8	
EA65/32H	120.9	33.58	62.2	37.55	45		54.5		6.8	
EA80/16	97.2	27.00	40.3	2900	15.23	18.5	Y2-200L1-2 30KW	70	174	2.7
	162.0	45.00	34.7		19.13	22		80		3.8
	194.4	54.00	29.3		20.95	30		74		5
EA80/16 A	92.2	25.60	34.8		12.94	18.5	Y2-180M-2 22KW	67.5	165	2.7
	153.6	42.67	29.1		16.01	18.5		76		3.8
	184.3	51.21	24.2		17.60	22		69		5
EA80/16 B	86.6	24.05	30.7		11.49	15	Y2-160L-2 18.5KW	63	155	2.7
	144.3	40.09	24.7		13.11	15		74		3.8
	173.2	48.10	20.1		14.36	18.5		66		5

EA系列卧式单级单吸离心泵 性能参数表

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		电机型号	效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	Motor Model	%	mm	m
EA80/16 C	81.0	22.50	26.9	2900	9.55	11	Y2-160M2-2 15KW	62	145	2.7
	135.0	37.50	21.6		11.03	15		72		3.8
	162.0	45.00	17.4		11.99	15		64		5
EA80/16 D	75.4	20.95	22.8	2900	8.07	11	Y2-160M1-2 11KW	58	135	2.7
	125.7	34.91	18.2		9.44	11		66		3.8
	150.8	41.90	14.4		9.85	11		60		5
EA80/20	114.0	31.67	60.5	2900	28.02	37	Y2-225M-2 45KW	67	214	3.1
	190.0	52.78	52.7		35.04	45		77.8		4.8
	228.0	63.34	46.0		38.85	45		73.5		5.8
EA80/20 A	109.2	30.34	55.1	2900	25.20	30	Y2-200L2-2 37KW	65	205	4
	182.0	50.56	47.9		30.78	37		77.1		4.9
	218.4	60.67	41.5		34.04	37		72.5		5.85
EA80/20 B	103.9	28.86	49.6	2900	22.62	30	Y2-200L2-2 37KW	62	195	4
	173.1	48.09	43.6		27.04	30		76		4.7
	207.8	57.71	37.6		29.54	37		72		5.5
EA80/20 C	98.6	27.38	43.8	2900	18.95	30	Y2-200L1-2 30KW	62	185	4
	164.3	45.63	37.2		22.48	30		74		4.7
	197.1	54.75	31.8		24.73	30		69		5.5
EA80/20 D	93.2	25.90	39.2	2900	15.07	18.5	Y2-200L1-2 30KW	66	175	4
	155.4	43.16	33.3		18.53	22		76		4.7
	186.5	51.79	28.5		19.26	30		75		5.5
EA80/20 E	87.9	24.42	34.8	2900	12.73	15	Y2-180M-2 22KW	65.5	165	4
	146.5	40.69	29.6		15.63	18.5		75.5		4.7
	175.8	48.83	25.3		16.25	22		74.5		5.5
EA80/26	114.0	31.67	95.0	2900	45.01	55	Y2-280S-2 75KW	65.5	264	2.6
	190.0	52.78	83.5		57.59	75		75		4.2
	228.0	63.34	74.0		63.79	75		72		5.8
EA80/26 A	110.1	30.59	87.5	2900	40.35	55	Y2-280S-2 75KW	65	255	3.95
	183.5	50.98	76.5		51.30	75		74.5		5.2
	220.2	61.18	69.0		56.51	75		73.2		6.25
EA80/26 B	105.8	29.39	80.1	2900	36.05	45	Y2-250M-2 55KW	64	245	3.9
	176.3	48.98	70.0		45.41	55		74		5
	211.6	58.78	62.0		50.09	55		71.3		6
EA80/26 C	101.5	28.19	73.3	2900	32.14	45	Y2-250M-2 55KW	63	235	3.9
	169.1	46.98	63.0		39.68	55		73.1		5
	203.0	56.38	55.1		42.88	55		71		6
EA80/26 D	97.2	26.99	66.5	2900	28.37	37	Y2-225M-2 45KW	62	225	3.9
	161.9	44.98	57.0		34.75	45		72.3		5
	194.3	53.98	49.6		37.22	45		70.5		6
EA80/26 E	92.8	25.79	60.1	2900	24.90	30	Y2-200L2-2 37KW	61	215	3.9
	154.7	42.98	50.3		30.05	37		70.5		5
	185.7	51.58	44.5		32.13	37		70		6
EA80/26 F	88.5	24.59	54.0	2900	21.87	30	Y2-220L2-2 37KW	59.5	205	3.9
	147.5	40.98	45.1		25.88	37		70		5
	177.1	49.18	39.8		27.60	37		69.5		6
EA80/32G EA80/32H	125.9	34.98	146.0	2900	80.08	90	Y2-315M1-2 132KW	62.5	329	3
	209.9	58.30	133.5		103.77	132		73.5		6.8
	251.9	69.96	122.0		117.81	132		71		9
EA80/32G EA80/32H A	120.6	33.49	134.0	2900	71.51	90	Y2-315S-2 110KW	61.5	315	3
	200.9	55.82	122.5		91.54	110		73.2		6.8
	241.1	66.98	112.5		103.72	110		71.2		9
EA80/32G EA80/32H B	114.8	31.90	119.0	2900	61.48	75	Y2-315S-2 110K	60.5	300	3
	191.4	53.16	109.0		77.79	90		73		6.8
	229.7	63.79	99.3		87.19	110		71.2		9
EA80/32G EA80/32H C	109.1	30.30	106.0	2900	52.46	75	Y2-280M-2 90KW	60	285	3
	181.8	50.50	96.5		65.34	75		73.1		6.8
	218.2	60.60	88.0		73.61	90		71		9

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		电机型号 Motor Model	效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r	
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor		%	mm	m	
EA80/32G EA80/32H D	103.3	28.71	95.5	2900	45.08	55	Y2-280S-2 75KW	59.6	270	3	
	172.2	47.84	87.0		55.88	75		73		6.8	
	206.7	57.41	79.2		63.21	75		70.5		9	
EA80/32G EA80/32H E	97.6	27.11	85.5		2900	38.50	45	Y2-280S-2 75KW	59	255	3
	162.7	45.19	78.0			48.31	55		71.5		6.8
	195.2	54.22	70.0			53.14	75		70		9
EA100/16	151.2	42.00	34.5	2900		21.04	30	Y2-200L1-2 30KW	67.5	176	4
	252.0	70.00	26.7			23.94	30		76.5		4.6
	302.4	84.00	20.8			24.12	30		71		6.1
EA100/16 A	141.8	39.38	30.0		2900	17.41	22	Y2-180M-2 22KW	66.5	165	4.9
	236.3	65.63	23.0			19.72	22		75		4.9
	283.5	78.75	17.7			20.09	22		68		5.4
EA100/16 B	133.2	36.99	25.8	2900		14.39	18.5	Y2-160L-2 18.5KW	65	155	4.8
	221.9	61.65	19.2			16.11	18.5		72		4.8
	266.3	73.98	14.6			16.16	18.5		65.5		5.3
EA100/16 C	124.6	34.60	22.8		2900	12.08	15	Y2-160M2-2 15KW	64	145	4.7
	207.6	57.67	16.2			13.08	15		70		4.7
	249.1	69.20	12.0			13.13	15		62		5.2
EA100/20	171.0	47.50	58.7	2900		39.04	45	Y2-280S-2 75KW	70	214	3.9
	285.0	79.17	50.1			48.59	55		80		5.8
	342.0	95.00	42.0			52.49	75		74.5		6.9
EA100/20 A	163.8	45.50	53.2		2900	34.38	45	Y2-250M-2 55KW	69	205	3.9
	273.0	75.84	44.3			41.68	55		79		5.8
	327.6	91.01	37.0			44.90	55		73.5		6.9
EA100/20 B	155.8	43.28	47.0	2900		29.32	37	Y2-225M-2 45KW	68	195	3.9
	259.7	72.14	38.7			35.53	45		77		5.8
	311.6	86.57	31.5			37.91	45		70.5		6.9
EA100/20 C	147.8	41.06	42.0		2900	25.61	30	Y2-200L2-2 37KW	66	185	3.9
	246.4	68.44	33.0			30.11	37		73.5		5.8
	295.7	82.13	26.3			31.36	37		67.5		6.9
EA100/20 D	139.8	38.85	37.2	2900		22.48	30	Y2-200L1-2 30KW	63	175	3.9
	233.1	64.74	28.7			26.01	30		70		5.8
	279.7	77.69	21.8			25.93	30		64		6.9
EA100/20 E	131.9	36.63	32.0		2900	19.30	30	Y2-200L1-2 30KW	59.5	165	3.9
	219.8	61.04	24.0			21.27	30		67.5		5.8
	263.7	73.25	18.0			21.54	30		60		6.9
EA100/26H	177.0	49.16	95.0	2900		70.42	90	Y2-315S-2 110KW	65	264	3.9
	295.0	81.94	85.0			87.51	110		78		5.8
	354.0	98.33	75.0			95.72	110		75.5		7
EA100/26H A	171.0	47.49	88.0		2900	63.01	75	Y2-315S-2 110KW	65	255	3.9
	284.9	79.15	78.2			78.57	90		77.2		5.8
	341.9	94.98	69.0			85.63	110		75		7
EA100/26H B	164.3	45.63	81.5	2900		56.94	75	Y2-280M-2 90KW	64	245	3.9
	273.8	76.04	71.5			70.48	90		75.6		5.8
	328.5	91.25	63.0			76.13	90		74		7
EA100/26H C	157.5	43.76	75.0		2900	51.04	75	Y2-280S-2 75KW	63	235	3.9
	262.6	72.94	65.2			62.56	75		74.5		5.8
	315.1	87.53	56.8			67.20	75		72.5		7
EA100/26H D	150.8	41.90	68.7	2900		45.52	55	Y2-280S-2 75KW	62	225	3.9
	251.4	69.84	58.5			55.22	75		72.5		5.8
	301.7	83.80	50.5			59.25	75		70		7
EA100/26H E	144.1	40.04	62.3		2900	39.75	55	Y2-280S-2 75KW	61.5	215	3.9
	240.2	66.73	52.4			48.61	75		70.5		5.8
	288.3	80.08	44.5			51.36	75		68		7
EA100/26H F	137.4	38.18	56.0	2900		36.12	45	Y2-250M-2 55KW	59	205	3.9
	229.1	63.63	46.4			41.93	55		69		5.8
	274.9	76.35	38.0			45.13	55		63		7

EA系列卧式单级单吸离心泵 性能参数表

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		电机型号 Motor Model	效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor		%	mm	m
EA125/20	216.0	60.00	56.5	2900	55.84	75	Y2-280M-2 90KW	59.5	214	4.7
	360.0	100.00	49.0		64.89	90		74		6.5
	432.0	120.00	42.5		68.94	90		72.5		7.2
EA125/20 A	206.9	57.48	51.7		50.21	55	Y2-280S-2 75KW	58	205	4.7
	344.9	95.79	43.6		56.46	75		72.5		6.5
	413.8	114.95	37.0		58.46	75		71.3		7.2
EA125/20 B	196.8	54.67	46.3		43.52	55	Y2-250M-2 55KW	57	195	4.7
	328.0	91.12	37.8		47.21	55		71.5		6.5
	393.6	109.35	31.5		48.92	55		69		7.2
EA125/20C	186.7	51.87	40.6		38.22	45	Y2-225M-2 45KW	54	185	4.7
	311.2	86.45	32.3		39.09	45		70		6.5
	373.5	103.74	26.2		40.36	45		66		7.2
EA32/13	4.3	1.21	6.7	0.17	0.55	Y2-801-4 0.55KW	47	139	1.7	
	7.2	2.01	6.2	0.21	0.55		58		2	
	8.7	2.41	5.8	0.23	0.55		59		2.1	
EA32/13 A	4.1	1.13	5.7	0.14	0.55	Y2-801-4 0.55KW	46	130	1.7	
	6.8	1.88	5.2	0.17	0.55		56.5		2	
	8.1	2.26	4.8	0.18	0.55		58		2.1	
EA32/13 B	3.7	1.04	4.7	0.11	0.55	Y2-801-4 0.55KW	45	120	1.7	
	6.2	1.74	4.2	0.13	0.55		55		2	
	7.5	2.08	3.9	0.14	0.55		56		2.1	
EA32/13 C	3.4	0.95	3.9	0.08	0.55	Y2-801-4 0.55KW	45	110	1.7	
	5.7	1.59	3.5	0.10	0.55		54		2	
	6.9	1.91	3.1	0.11	0.55		54		2.1	
EA32/13 D	3.1	0.87	3.1	0.06	0.55	Y2-801-4 0.55KW	44	100	1.7	
	5.2	1.45	2.7	0.08	0.55		51		2	
	6.2	1.74	2.3	0.08	0.55		52		2.1	
EA32/16	5.2	1.45	10.6	0.32	0.55	Y2-802-4 0.75KW	47.5	174	1.8	
	8.7	2.41	10.1	0.43	0.55		55		2	
	10.4	2.89	9.5	0.48	0.75		56		2.2	
EA32/16 A	4.9	1.37	9.5	0.28	0.55	Y2-801-4 0.55KW	45	165	1.8	
	8.2	2.29	9.0	0.37	0.55		55		2	
	9.9	2.74	8.5	0.41	0.55		55.5		2.2	
EA32/16 B	4.6	1.29	8.4	0.24	0.55	Y2-801-4 0.55KW	44	155	1.8	
	7.7	2.15	7.8	0.31	0.55		53.5		2	
	9.3	2.58	7.3	0.34	0.55		54		2.2	
EA32/16 C	4.3	1.21	7.4	0.21	0.55	Y2-801-4 0.55KW	42	145	1.8	
	7.2	2.01	6.8	0.26	0.55		51.5		2	
	8.7	2.41	6.4	0.29	0.55		52		2.2	
EA32/16 D	4.0	1.12	6.4	0.17	0.55	Y2-801-4 0.55KW	41.5	135	1.8	
	6.7	1.87	5.9	0.22	0.55		49.5		2	
	8.1	2.24	5.5	0.24	0.55		50		2.2	
EA32/16 E	3.7	1.04	5.5	0.14	0.55	Y2-801-4 0.55KW	40	125	1.8	
	6.2	1.73	5.1	0.18	0.55		47		2	
	7.5	2.08	4.7	0.20	0.55		49		2.2	
EA32/20	5.2	1.45	16.0	0.61	0.75	Y2-90S-4 1.1KW	37	214	1.9	
	8.7	2.41	14.7	0.75	1.1		46.5		2	
	10.4	2.89	13.6	0.81	1.1		47.5		2.3	
EA32/20 A	5.0	1.39	14.6	0.55	0.75	Y2-90S-4 1.1KW	36	205	1.9	
	8.3	2.31	13.2	0.65	1.1		46		2	
	10.0	2.77	12.1	0.71	1.1		46.5		2.3	
EA32/20 B	4.7	1.32	13.2	0.49	0.75	Y2-802-4 0.75KW	34.5	195	1.9	
	7.9	2.20	11.9	0.57	0.75		45		2	
	9.5	2.64	10.9	0.63	0.75		45		2.3	
EA32/20 C	4.5	1.25	11.9	0.43	0.75	Y2-802-4 0.75KW	34	185	1.9	
	7.5	2.08	10.8	0.55	0.75		40		2	
	9.0	2.50	9.9	0.54	0.75		44.5		2.3	

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		电机型号	效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	Motor Model	%	mm	m
EA32/20 D	4.3	1.18	10.6	1450	0.37	0.55	Y2-801-4 0.55KW	33.5	175	1.9
	7.1	1.97	9.6		0.44	0.55		42		2
	8.5	2.36	8.8		0.49	0.55		42		2.3
EA32/20 E	4.0	1.11	9.5		0.31	0.55	Y2-801-4 0.55KW	33	165	1.9
	6.7	1.86	8.6		0.39	0.55		40		2
	8.0	2.23	7.8		0.43	0.55		40		2.3
EA32/26	6.6	1.83	23.7	1.42	2.2	Y2-100L2-4 3KW	30	264	1.8	
	11.0	3.05	22.4	1.76	2.2		38		2.1	
	13.2	3.66	21.4	1.92	3		40		2.4	
EA32/26 A	6.4	1.77	21.8	1.26	2.2	Y2-100L1-4 2.2KW	30	255	1.8	
	10.6	2.95	20.9	1.63	2.2		37		2.1	
	12.7	3.54	19.9	1.75	2.2		39.5		2.4	
EA32/26 B	6.1	1.70	20.2	1.16	2.2	Y2-100L1-4 2.2KW	29	245	1.8	
	10.2	2.83	19.3	1.45	2.2		37		2.1	
	12.2	3.40	18.5	1.58	2.2		39		2.4	
EA32/26 C	5.9	1.63	18.6	1.04	2.2	Y2-100L1-4 2.2KW	28.5	235	1.8	
	9.8	2.71	17.8	1.32	2.2		36		2.1	
	11.7	3.26	17.0	1.43	2.2		38		2.4	
EA32/26 D	5.6	1.56	17.1	0.93	1.5	Y2-100L1-4 2.2KW	28	225	1.8	
	9.4	2.60	16.3	1.19	1.5		35		2.1	
	11.2	3.12	15.7	1.30	1.5		37		2.4	
EA32/26 E	5.4	1.49	15.9	0.84	1.5	Y2-90L-4 1.5KW	27.5	215	1.8	
	8.9	2.48	15.1	1.08	1.5		34		2.1	
	10.7	2.98	14.5	1.18	1.5		36		2.4	
EA32/26 F	5.1	1.42	14.8	0.78	1.5	Y2-90L-4 1.5KW	26.5	205	1.8	
	8.5	2.37	14.0	0.98	1.5		33		2.1	
	10.2	2.84	13.3	1.06	1.5		35		2.4	
EA40/13	8.7	2.42	6.4	0.26	0.55	Y2-801-4 0.55KW	59	139	1.8	
	14.5	4.03	6.0	0.33	0.55		71		2	
	17.4	4.84	5.6	0.37	0.55		72		2.4	
EA40/13 A	8.1	2.26	5.6	0.21	0.55	Y2-801-4 0.55KW	58	130	1.8	
	13.6	3.77	5.2	0.27	0.55		71		2	
	16.3	4.52	4.8	0.30	0.55		71		2.4	
EA40/13 B	7.5	2.09	4.8	0.17	0.55	Y2-801-4 0.55KW	56	120	1.8	
	12.5	3.48	4.3	0.21	0.55		69		2	
	15.0	4.17	3.9	0.23	0.55		68.5		2.4	
EA40/13 C	6.9	1.91	4.0	0.15	0.55	Y2-801-4 0.55KW	51	110	1.8	
	11.5	3.19	3.6	0.18	0.55		64		2	
	13.8	3.83	3.3	0.19	0.55		63.5		2.4	
EA40/13 D	6.3	1.74	3.3	0.11	0.55	Y2-801-4 0.55KW	50.5	100	1.8	
	10.4	2.90	3.0	0.15	0.55		58		2	
	12.5	3.48	2.6	0.15	0.55		58		2.4	
EA40/16	8.7	2.42	10.0	0.40	0.55	Y2-90S-4 1.1KW	59	174	1.8	
	14.5	4.03	9.0	0.56	0.75		63		2	
	17.4	4.84	8.1	0.62	1.1		61.5		2.4	
EA40/16 A	8.3	2.29	8.9	0.35	0.55	Y2-802-4 0.75KW	57	165	1.8	
	13.8	3.82	8.0	0.48	0.75		62		2	
	16.5	4.59	7.2	0.54	0.75		60		2.4	
EA40/16 B	7.8	2.15	7.8	0.29	0.55	Y2-802-4 0.75KW	56	155	1.8	
	12.9	3.59	7.0	0.41	0.55		60		2	
	15.5	4.31	6.3	0.46	0.75		58		2.4	
EA40/16 C	7.3	2.02	7.0	0.28	0.55	Y2-801-4 0.55KW	50	145	1.8	
	12.1	3.36	6.0	0.35	0.55		57		2	
	14.5	4.03	5.4	0.39	0.55		55		2.4	
EA40/16 D	6.8	1.88	6.0	0.23	0.55	Y2-801-4 0.55KW	48.5	135	1.8	
	11.3	3.13	5.2	0.30	0.55		53		2	
	13.5	3.75	4.4	0.32	0.55		50		2.4	

EA系列卧式单级单吸离心泵 性能参数表

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		电机型号 Motor Model	效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor		%	mm	m
EA40/16 E	6.3	1.74	5.1	1450	0.20	0.55	Y2-80I-4 0.55KW	43	125	1.8
	10.4	2.90	4.3		0.25	0.55		49		2
	12.5	3.47	3.6		0.27	0.55		45		2.4
EA40/20	8.7	2.42	15.5	1450	0.77	1.1	Y2-90L-4 1.5KW	48	214	1.8
	14.5	4.03	14.3		0.99	1.5		57		2.2
	17.4	4.84	13.2		1.09	1.5		57.5		2.5
EA40/20 A	8.3	2.32	14.0	1450	0.66	1.1	Y2-90L-4 1.5KW	48	205	1.8
	13.9	3.86	13.0		0.88	1.1		56		2.2
	16.7	4.63	12.0		0.96	1.5		57		2.5
EA40/20 B	7.9	2.20	12.7	1450	0.60	1.1	Y2-90S-4 1.1KW	46	195	1.8
	13.2	3.67	11.6		0.76	1.1		55		2.2
	15.9	4.41	10.8		0.84	1.1		55.5		2.5
EA40/20 C	7.5	2.09	11.2	1450	0.50	0.75	Y2-90S-4 1.1KW	45.5	185	1.8
	12.5	3.48	10.4		0.66	1.1		54		2.2
	15.1	4.18	9.6		0.72	1.1		54.5		2.5
EA40/20 D	7.1	1.98	10.0	1450	0.44	0.75	Y2-802-4 0.75KW	44	175	1.8
	11.9	3.30	9.2		0.56	0.75		53		2.2
	14.2	3.95	8.4		0.61	0.75		53.5		2.5
EA40/20 E	6.7	1.86	9.0	1450	0.38	0.55	Y2-802-4 0.75KW	43.5	165	1.8
	11.2	3.11	8.0		0.48	0.75		50.5		2.2
	13.4	3.73	7.3		0.52	0.75		51		2.5
EA40/26	9.6	2.66	24.0	1450	1.65	2.2	Y2-100L2-4 3KW	38	264	1.8
	16.0	4.44	22.7		2.02	2.2		49		1.9
	19.2	5.33	21.7		2.22	3		51		2.2
EA40/26 A	9.3	2.57	22.0	1450	1.50	2.2	Y2-100L2-4 3KW	37	255	1.8
	15.4	4.29	20.7		1.83	3		47.5		1.9
	18.5	5.15	19.6		1.98	3		50		2.2
EA40/26 B	8.9	2.47	20.3	1450	1.37	2.2	Y2-100L2-4 2.2KW	36	245	1.8
	14.8	4.12	18.9		1.64	2.2		46.5		1.9
	17.8	4.94	18.0		1.76	2.2		49.5		2.2
EA40/26 C	8.5	2.37	18.4	1450	1.26	2.2	Y2-100L1-4 2.2KW	34	235	1.8
	14.2	3.95	17.3		1.47	2.2		45.5		1.9
	17.1	4.74	16.4		1.57	2.2		48.5		2.2
EA40/26 D	8.2	2.27	16.8	1450	1.13	1.5	Y2-100L1-4 2.2KW	33	225	1.8
	13.6	3.78	15.7		1.29	2.2		45		1.9
	16.3	4.54	15.0		1.42	2.2		47		2.2
EA40/26 E	7.8	2.17	15.2	1450	1.01	1.5	Y2-100L1-4 1.5KW	32	215	1.8
	13.0	3.62	14.2		1.14	1.5		44		1.9
	15.6	4.34	13.5		1.23	1.5		46.5		2.2
EA40/26 F	7.4	2.07	13.7	1450	0.93	1.5	Y2-100L1-4 1.5KW	30	205	1.8
	12.4	3.45	12.9		1.04	1.5		42		1.9
	14.9	4.14	12.2		1.10	1.5		45		2.2
EA40/32	10.8	3.00	37.5	1450	3.56	5.5	Y2-132S-4 5.5KW	31	329	2.1
	18.0	5.00	35.6		4.36	5.5		40		2.3
	21.6	6.00	33.8		4.73	5.5		42		2.5
EA40/32 A	10.3	2.87	33.9	1450	3.13	4	Y2-132S-4 5.5KW	30.5	315	2.1
	17.2	4.79	32.0		3.75	5.5		40		2.3
	20.7	5.74	30.5		4.09	5.5		42		2.5
EA40/32 B	9.8	2.74	30.6	1450	2.73	4	Y2-132S-4 5.5KW	30	300	2.1
	16.4	4.56	29.0		3.32	4		39		2.3
	19.7	5.47	27.6		3.61	5.5		41		2.5
EA40/32 C	9.4	2.60	27.8	1450	2.36	3	Y2-112 M-4 4KW	30	285	2.1
	15.6	4.33	26.0		2.94	4		37.5		2.3
	18.7	5.20	24.4		3.11	4		40		2.5
EA40/32 D	8.9	2.46	24.3	1450	1.99	3	Y2-112 M-4 4KW	29.5	270	2.1
	14.8	4.10	23.2		2.52	4		37		2.3
	17.7	4.92	21.5		2.66	4		39		2.5

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		电机型号	效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	Motor Model	%	mm	m
EA40/32 E	8.4	2.33	22.0	1450	1.93	3	Y2-100L -4 3KW	26	255	2.1
	14.0	3.88	20.3		2.20	3		35		2.3
	16.7	4.65	19.6		2.41	3		37		2.5
EA50/13	17.4	4.82	6.8	1450	0.54	0.75	Y2-90S-4 1.1KW	59	139	2.2
	28.9	8.04	6.3		0.69	1.1		72		2.4
	34.7	9.65	5.8		0.75	1.1		73		2.7
EA50/13 A	16.2	4.51	5.8	1450	0.44	0.75	Y2-802-4 0.75KW	58.5	130	2.2
	27.1	7.52	5.2		0.53	0.75		72		2.4
	32.5	9.02	4.7		0.58	0.75		72		2.7
EA50/13 B	15.0	4.16	4.9	1450	0.33	0.55	Y2-801-4 0.55KW	62	120	2.2
	25.0	6.94	4.4		0.42	0.55		71		2.4
	30.0	8.33	3.8		0.45	0.55		69		2.7
EA50/13 C	13.7	3.82	4.1	1450	0.25	0.55	Y2-801-4 0.55	61	110	2.2
	22.9	6.36	3.4		0.32	0.55		67		2.4
	27.5	7.64	2.8		0.33	0.55		64		2.7
EA50/16	18.5	5.15	10.5	1450	0.81	1.1	Y2-90L-4 1.5KW	65	174	2.1
	30.9	8.58	9.5		1.08	1.5		74		2.2
	37.1	10.30	8.8		1.27	1.5		70		2.4
EA50/16 A	17.6	4.88	9.4	1450	0.71	1.1	Y2-90L-4 1.5KW	64	165	2.1
	29.3	8.14	8.5		0.93	1.5		73		2.2
	35.1	9.76	7.8		1.02	1.5		73		2.4
EA50/16 B	16.5	4.59	8.3	1450	0.61	1.1	Y2-90S-4 1.1KW	61	155	2.1
	27.5	7.64	7.5		0.78	1.1		72		2.2
	33.0	9.17	6.9		0.86	1.1		72		2.4
EA50/16 C	15.4	4.29	7.3	1450	0.52	0.75	Y2-90S-4 1.1KW	59	145	2.1
	25.7	7.15	6.6		0.66	1.1		70		2.2
	30.9	8.58	6.0		0.71	1.1		71.5		2.4
EA50/16 D	14.4	3.99	6.3	1450	0.43	0.55	Y2-802-4 0.75KW	57.5	135	2.1
	24.0	6.66	5.7		0.55	0.75		67.5		2.2
	28.8	7.99	5.0		0.58	0.75		67		2.4
EA50/16 E	13.3	3.70	5.4	1450	0.35	0.55	Y2-801-4 0.55KW	56	125	2.1
	22.2	6.16	4.6		0.42	0.55		66		2.2
	26.6	7.40	4.0		0.45	0.55		65		2.4
EA50/20	18.0	5.00	15.3	1450	1.27	2.2	Y2-100L1-4 2.2KW	59	214	1.3
	30.0	8.33	13.3		1.67	2.2		65		1.5
	36.0	10.00	11.8		1.86	2.2		62		1.8
EA50/20 A	17.2	4.79	14.0	1450	1.15	1.5	Y2-100L1-4 2.2KW	57.5	205	1.3
	28.7	7.98	12.0		1.45	2.2		64.5		1.5
	34.5	9.58	10.6		1.63	2.2		61		1.8
EA50/20 B	16.4	4.55	12.5	1450	1.02	1.5	Y2-100L1-4 2.2KW	54.5	195	1.3
	27.3	7.59	10.7		1.26	2.2		63		1.5
	32.8	9.11	9.4		1.40	2.2		60		1.8
EA50/20 C	15.6	4.32	11.1	1450	0.90	1.1	Y2-90L-4 1.5KW	52	185	1.3
	25.9	7.20	9.6		1.11	1.5		61.5		1.5
	31.1	8.64	8.2		1.19	1.5		58.5		1.8
EA50/20 D	14.7	4.09	9.8	1450	0.76	1.1	Y2-90L-4 1.5KW	51.5	175	1.3
	24.5	6.81	8.3		0.95	1.5		58.5		1.5
	29.4	8.17	7.2		1.05	1.5		55		1.8
EA50/20 E	13.9	3.85	8.6	1450	0.66	1.1	Y2-90S-4 1.1KW	49	165	1.3
	23.1	6.42	7.1		0.81	1.1		55		1.5
	27.7	7.71	5.9		0.86	1.1		52		1.8
EA50/26	19.2	5.33	25.0	1450	2.47	3	Y2-132S-4 5.5KW	53	264	1.7
	32.0	8.89	23.5		3.25	4		63		1.8
	38.4	10.67	22.3		3.64	5.5		64		1.9
EA50/26 A	18.5	5.15	23.1	1450	2.26	3	Y2-132S-4 5.5KW	51.5	255	1.7
	30.9	8.59	21.7		2.95	4		62		1.8
	37.1	10.30	20.6		3.30	5.5		63		1.9

EA系列卧式单级单吸离心泵 性能参数表

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		电机型号 Motor Model	效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor		%	mm	m
EA50/26 B	17.8	4.95	21.4	1450	2.02	3	Y2-112 M-4 4KW	51.5	245	1.7
	29.7	8.25	20.0		2.61	4		62		1.8
	35.6	9.90	19.1		2.92	4		63.5		1.9
EA50/26 C	17.1	4.75	19.8		1.81	3	Y2-112 M-4 4KW	51	235	1.7
	28.5	7.91	18.6		2.36	3		61		1.8
	34.2	9.50	17.7		2.61	4		63		1.9
EA50/26 D	16.4	4.55	18.2		1.62	2.2	Y2-100L2-4 3KW	50	225	1.7
	27.3	7.58	17.0		2.10	3		60		1.8
	32.7	9.09	16.1		2.33	3		61.5		1.9
EA50/26 E	15.6	4.34	16.6		1.43	2.2	Y2-100L2-4 3KW	49.5	215	1.7
	26.1	7.24	15.5		1.85	3		59.5		1.8
	31.3	8.69	14.7		2.05	3		61		1.9
EA50/26 F	14.9	4.14	15.1		1.25	1.5	Y2-90L-4 2.2KW	49	205	1.7
	24.9	6.90	14.0		1.62	2.2		58.5		1.8
	29.8	8.28	13.2		1.79	2.2		60		1.9
EA50/32	30.2	8.40	35.6	1450	5.64	7.5	Y2-160M-4 11KW	52	329	1.5
	50.4	14.00	31.1		7.36	11		58		2.2
	60.5	16.80	27.8		8.32	11		55		2.7
EA50/32 A	29.0	8.04	32.5		4.93	7.5	Y2-160M-4 11KW	52	315	1.5
	48.3	13.40	27.3		6.24	7.5		57.5		2.2
	57.9	16.09	24.9		7.14	11		55		2.7
EA50/32 B	27.6	7.66	29.4		4.24	5.5	Y2-132M-4 7.5KW	52	300	1.5
	46.0	12.77	25.1		5.51	7.5		57		2.2
	55.1	15.32	22.4		6.23	7.5		54		2.7
EA50/32 C	26.2	7.28	26.1		3.58	5.5	Y2-132M-4 7.5KW	52	285	1.5
	43.7	12.13	22.4		4.75	7.5		56		2.2
	52.4	14.55	19.6		5.23	7.5		53.5		2.7
EA50/32 D	24.8	6.89	23.0		2.99	4	Y2-132S-4 5.5KW	52	270	1.5
	41.4	11.49	19.8		3.98	5.5		56		2.2
	49.6	13.79	17.2		4.47	5.5		52		2.7
EA50/32 E	23.4	6.51	20.2		2.48	4	Y2-112 M-4 4KW	52	255	1.5
	39.1	10.85	19.8		3.83	4		55		2.2
	46.9	13.02	14.9		3.66	4		52		2.7
EA65/13	29.0	8.05	6.4	1450	0.78	1.1	Y2-90L-4 1.5KW	65	139	2.3
	48.3	13.41	5.5		0.93	1.5		78		2.4
	57.9	16.09	4.8		0.98	1.5		77		2.7
EA65/13 A	27.1	7.53	5.5		0.60	0.75	Y2-90S-4 1.1KW	68	130	2.3
	45.2	12.54	4.6		0.72	1.1		78		2.4
	54.2	15.05	3.6		0.71	1.1		75		2.7
EA65/13 B	25.0	6.95	4.6		0.46	0.75	Y2-802-4 0.75KW	67.5	120	2.3
	41.7	11.58	3.8		0.56	0.75		77.5		2.4
	50.0	13.89	3.0		0.55	0.75		74		2.7
EA65/16	30.0	8.33	10.2		1.26	2.2	Y2-100L1-4 2.2KW	66	174	2
	50.0	13.89	8.8		1.54	2.2		78		2.3
	60.0	16.67	7.8		1.65	2.2		77		2.6
EA65/16 A	28.5	7.90	9.2		1.08	1.5	Y2-100L1-4 2.2KW	65.5	165	2
	47.4	13.17	7.5		1.26	2.2		77		2.3
	56.9	15.81	6.7		1.38	2.2		75		2.6
EA65/16 B	26.7	7.42	8.1	1450	0.91	1.1	Y2-90L-4 1.5KW	65	155	2
	44.5	12.37	7.1		1.14	1.1		75.5		2.3
	53.5	14.85	5.9		1.16	1.5		74		2.6
EA65/16 C	25.0	6.95	7.1		0.75	1.1	Y2-90L-4 1.5KW	64	145	2
	41.7	11.58	6.0		0.92	1.5		74		2.3
	50.0	13.89	5.2		0.98	1.5		72		2.6
EA65/16 D	23.3	6.47	6.1		0.64	1.1	Y2-90S-4 1.1KW	61	135	2
	38.8	10.78	5.2		0.76	1.1		72		2.3
	46.6	12.93	4.5		0.82	1.1		70		2.6

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		电机型号	效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	Motor Model	%	mm	m
EA65/16 E	21.6	5.99	5.5	1450	0.54	0.75	Y2-90S-4 1.1KW	60	125	2
	35.9	9.98	4.5		0.63	1.1		69		2.3
	43.1	11.97	3.8		0.67	1.1		67		2.6
EA65/20	33.0	9.16	15.6	1450	2.15	3	Y2-112 M-4 4KW	65	214	1.7
	55.0	15.27	13.7		2.83	4		72.5		1.9
	66.0	18.32	11.4		2.88	4		71		2.1
EA65/20 A	31.6	8.78	14.1		1.89	3	Y2-100L2-4 3KW	64	205	1.7
	52.7	14.63	12.4		2.45	3		72.5		1.9
	63.2	17.55	11.1		2.65	3		72		2.1
EA65/20 B	30.1	8.35	12.8		1.68	2.2	Y2-100L2-4 3KW	62	195	1.7
	50.1	13.91	11.2		2.12	3		72		1.9
	60.1	16.70	10.0		2.28	3		72		2.1
EA65/20 C	28.5	7.92	11.4		1.47	2.2	Y2-100L1-4 2.2KW	60	185	1.7
	47.5	13.20	10.0		1.81	2.2		71.5		1.9
	57.0	15.84	9.0		1.98	2.2		71		2.1
EA65/20 D	27.0	7.49	10.2		1.34	2.2	Y2-100L1-4 2.2KW	56	175	1.7
	45.0	12.49	8.9		1.57	2.2		69.5		1.9
	53.9	14.98	7.8		1.66	2.2		69		2.1
EA65/20 E	25.4	7.06	9.0		1.13	1.5	Y2-100L1-4 2.2KW	55	165	1.7
	42.4	11.77	7.7		1.31	2.2		68		1.9
	50.9	14.13	6.8		1.43	2.2		66		2.1
EA65/26	36.0	10.00	24.6	4.09	5.5	Y2-132M-4 7.5KW	59	264	1.7	
	60.0	16.67	23.0	5.22	7.5		72		1.9	
	72.0	20.00	21.7	5.83	7.5		73		2	
EA65/26 A	34.8	9.66	22.7	3.64	5.5	Y2-132M-4 7.5KW	59	255	1.7	
	58.0	16.10	21.5	4.70	7.5		72		1.9	
	69.6	19.32	20.0	5.19	7.5		73		2	
EA65/26 B	33.4	9.28	21.0	3.29	4	Y2-132S-4 5.5KW	58	245	1.7	
	55.7	15.47	19.8	4.23	5.5		71		1.9	
	66.8	18.56	18.3	4.59	5.5		72.5		2	
EA65/26 C	32.1	8.90	19.6	3.00	4	Y2-132S-4 5.5KW	57	235	1.7	
	53.4	14.84	18.2	3.79	5.5		70		1.9	
	64.1	17.81	17.0	4.12	5.5		72		2	
EA65/26 D	30.7	8.52	18.1	2.70	4	Y2-132S-4 5.5KW	56	225	1.7	
	51.1	14.21	16.7	3.37	5.5		69		1.9	
	61.4	17.05	15.3	3.70	5.5		69		2	
EA65/26 E	29.3	8.15	16.4	2.38	3	Y2-112 M-4 4KW	55	215	1.7	
	48.9	13.58	15.1	3.00	4		67		1.9	
	58.6	16.29	13.9	3.31	4		67		2	
EA65/26 F	28.0	7.77	15.0	2.15	3	Y2-112 M-4 4KW	53	205	1.7	
	46.6	12.94	13.8	2.67	4		65.5		1.9	
	55.9	15.53	12.5	2.93	4		65		2	
EA65/32	39.0	10.84	37.0	7.28	11	Y2-160L-4 15KW	54	329	1.9	
	65.0	18.06	34.0	9.40	11		64		2	
	78.0	21.67	31.7	10.36	15		65		2.1	
EA65/32 A	37.3	10.37	33.4	6.35	7.5	Y2-160M-4 11KW	53.5	315	1.9	
	62.2	17.29	30.6	8.10	11		64		2	
	74.7	20.75	28.4	8.95	11		64.5		2.1	
EA65/32 B	35.6	9.88	30.0	1450	5.48	7.5	Y2-160M-4 11KW	53	300	1.9
	59.3	16.47	27.2	6.86	11	64		2		
	71.1	19.76	24.8	7.50	11	64		2.1		
EA65/32 C	33.8	9.39	27.0	4.78	7.5	Y2-132M-4 7.5KW	52	285	1.9	
	56.3	15.64	24.2	5.84	7.5		63.5		2	
	67.6	18.77	21.8	6.32	7.5		63.5		2.1	
EA65/32 D	32.0	8.89	24.2	4.18	5.5	Y2-132M-4 7.5KW	50.5	270	1.9	
	53.4	14.82	21.4	4.97	7.5		62.5		2	
	64.0	17.79	19.0	5.34	7.5		62		2.1	

EA系列卧式单级单吸离心泵 性能参数表

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		电机型号 Motor Model	效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	%	mm	m	
EA65/32 E	30.2	8.40	21.1	1450	3.54	5.5	Y2-132S-4 5.5KW	49	255	1.9
	50.4	14.00	19.0		4.20	5.5		62		2
	60.5	16.80	16.6		4.55	5.5		60		2.1
EA80/16	48.0	13.33	9.9	1450	1.96	3	Y2-100L2-4 3KW	66	174	2.3
	80.0	22.22	8.8		2.46	3		78		2.5
	96.0	26.66	7.9		2.68	3		77		3.7
EA80/16 A	45.5	12.64	8.7	1450	1.66	2.2	Y2-100L2-4 3KW	65	165	2.3
	75.9	21.07	7.5		2.00	3		77.5		2.5
	91.0	25.28	6.5		2.15	3		75		3.7
EA80/16 B	42.8	11.88	7.5	1450	1.39	2.2	Y2-100L1-4 2.2KW	63	155	2.3
	71.3	19.79	6.3		1.60	2.2		76.5		2.5
	85.5	23.75	5.3		1.73	2.2		71.5		3.7
EA80/16 C	40.0	11.11	6.7	1450	1.18	1.5	Y2-100L1-4 2.2KW	62	145	2.3
	66.7	18.52	5.5		1.33	2.2		75		2.5
	80.0	22.22	4.5		1.40	2.2		70		3.7
EA80/16 D	37.2	10.34	5.8	1450	0.97	1.5	Y2-90L-4 1.5KW	61	135	2.3
	62.1	17.24	4.6		1.11	1.5		70		2.5
	74.5	20.69	3.8		1.13	1.5		68		3.7
EA80/20	57.0	15.83	15.4	1450	3.46	5.5	Y2-132M-4 7.5KW	69	214	1.9
	95.0	26.39	14.1		4.50	5.5		81		2
	114.0	31.67	13.1		4.99	7.5		81.5		2.4
EA80/20 A	54.6	15.17	14.0	1450	3.06	4	Y2-132S-4 5.5KW	68	205	1.9
	91.0	25.28	12.7		3.88	5.5		81		2
	109.2	30.34	11.6		4.26	5.5		81		2.4
EA80/20 B	51.9	14.43	12.6	1450	2.74	4	Y2-112 M-4 4KW	65	195	1.9
	86.6	24.05	11.2		3.30	4		80		2
	103.9	28.86	10.1		3.57	4		80		2.4
EA80/20 C	49.3	13.69	11.3	1450	2.41	3	Y2-112 M-4 4KW	63	185	1.9
	82.1	22.81	10.0		2.85	4		78.5		2
	98.6	27.38	8.8		3.03	4		78		2.4
EA80/20 D	46.6	12.95	10.0	1450	2.05	3	Y2-100L2-4 3KW	62	175	1.9
	77.7	21.58	8.7		2.42	3		76		2
	93.2	25.90	7.5		2.54	3		75		2.4
EA80/20 E	44.0	12.21	8.8	1450	1.74	3	Y2-100L2-4 3KW	60.5	165	1.9
	73.3	20.35	7.4		1.99	3		74		2
	87.9	24.42	6.4		2.13	3		72		2.4
EA80/26	57.0	15.83	24.0	1450	5.64	7.5	Y2-160M-4 11KW	66	264	1.6
	95.0	26.39	21.5		7.32	11		76		2
	114.0	31.67	19.5		8.07	11		75		2.4
EA80/26 A	55.1	15.29	22.4	1450	4.94	7.5	Y2-160M-4 11KW	68	255	1.6
	91.8	25.49	20.1		6.68	11		75		2
	110.1	30.59	17.9		7.45	11		72		2.4
EA80/26 B	52.9	14.69	20.7	1450	4.44	5.5	Y2-132M-4 7.5KW	67	245	1.6
	88.2	24.49	18.2		5.79	7.5		75.5		2
	105.8	29.39	16.3		6.34	7.5		74		2.4
EA80/26 C	50.7	14.09	19.2	1450	3.99	5.5	Y2-132M-4 7.5KW	66.5	235	1.6
	84.6	23.49	16.5		5.06	7.5		75		2
	101.5	28.19	14.7		5.56	7.5		73		2.4
EA80/26 D	48.6	13.49	17.6	1450	3.50	5.5	Y2-132M-4 7.5KW	66.5	225	1.6
	81.0	22.49	15.1		4.48	7.5		74.5		2
	97.2	26.99	13.2		4.78	7.5		73		2.4
EA80/26 E	46.4	12.90	16.0	1450	3.06	4	Y2-132S-4 5.5KW	66	215	1.6
	77.4	21.49	13.8		3.93	5.5		74		2
	92.8	25.79	11.9		4.18	5.5		72		2.4
EA80/26 F	44.3	12.30	14.5	1450	2.67	4	Y2-132S-4 5.5KW	65.5	205	1.6
	73.8	20.49	12.6		3.47	5.5		73		2
	88.5	24.59	10.7		3.66	5.5		70.5		2.4

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		电机型号	效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r	
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	Motor Model	%	mm	m	
EA80/32	60.0	16.67	35.8	1450	10.08	15	Y2-180M-4 18.5KW	58	329	1.5	
	100.0	27.78	33.4		13.18	18.5		69		1.8	
	120.0	33.34	31.3		14.40	18.5		71		2	
EA80/32 A	57.5	15.96	32.5		8.92	11	Y2-160L-4 15KW	57	315	1.5	
	95.8	26.60	30.1		11.21	15		70		1.8	
	114.9	31.92	28.4		12.56	15		70.7		2	
EA80/32 B	54.7	15.20	29.7		7.83	11	Y2-160L-4 15KW	56.5	300	1.5	
	91.2	25.33	27.5		9.75	15		70		1.8	
	109.4	30.40	25.6		10.79	15		70.7		2	
EA80/32 C	52.0	14.44	26.8		6.77	11	Y2-160M-4 11KW	56	285	1.5	
	86.6	24.06	24.9		8.38	11		70.1		1.8	
	104.0	28.88	22.8		9.14	11		70.6		2	
EA80/32 D	49.2	13.68	23.3		5.58	7.5	Y2-160M-4 11KW	56	270	1.5	
	82.1	22.80	21.5		6.83	11		70.3		1.8	
	98.5	27.36	19.7		7.50	11		70.4		2	
EA80/32 E	46.5	12.92	20.4		4.53	5.5	Y2-132M-4 7.5KW	57	255	1.5	
	77.5	21.53	18.8		5.63	7.5		70.5		1.8	
	93.0	25.84	17.1		6.15	7.5		70.4		2	
EA80/40	60.0	16.67	56.5		17.92	22	Y2-200L-4 30KW	51.5	409	1.8	
	100.0	27.78	52.2		23.11	30		61.5		2	
	120.0	33.34	47.8		25.52	30		61.2		2.3	
EA80/40 A	58.0	16.10	52.1		15.81	22	Y2-200L-4 30KW	52	395	2.2	
	96.6	26.83	47.8		20.44	30		61.5		2.4	
	115.9	32.19	44.2		22.82	30		61.1		3.2	
EA80/40 B	55.8	15.49	48.3	14.37	18.5	Y2-200L-4 30KW	51	380	2.2		
	92.9	25.81	44.2	18.18	22		61.5		2.4		
	111.5	30.97	40.2	20.34	30		60		3		
EA80/40 C	53.5	14.87	44.2	12.51	15	Y2-180L-4 22KW	51.5	365	2.2		
	89.2	24.79	40.2	15.93	18.5		61.3		2.3		
	107.1	29.75	36.7	17.83	22		60		2.8		
EA80/40 D	51.3	14.26	40.2	11.02	15	Y2-180L-4 18.5KW	51	350	2.2		
	85.6	23.77	36.5	14.08	18.5		60.4		2.3		
	102.7	28.53	33.3	15.73	22		59.2		2.8		
EA80/40 E	49.1	13.65	36.8	9.95	15	Y2-180L-4 18.5KW	49.5	335	2.2		
	81.9	22.75	33.5	12.53	15		59.6		2.3		
	98.3	27.30	30.4	13.86	18.5		58.7		2.8		
EA80/40 F	46.9	13.04	33.2	8.84	11	Y2-160L-4 15KW	48	320	2.2		
	78.2	21.73	30.4	11.11	15		58.3		2.3		
	93.9	26.08	27.8	12.40	15		57.3		2.8		
EA100/16	75.6	21.00	8.8	1450	2.70	4	Y2-112 M-4 4KW	67	176	2	
	126.0	35.00	7.2		3.05	4		81		2.1	
	151.2	42.00	5.8		3.11	4		76.2		2.7	
EA100/16 A	70.9	19.69	7.8		2.21	3	Y2-100L2-4 3KW	68	165	2	
	118.1	32.81	6.2		2.51	3		79.5		2.1	
	141.8	39.38	5.5		2.70	3		78.5		2.7	
EA100/16 B	66.6	18.49	6.8		1.84	3	Y2-100L2-4 3KW	67	155	2	
	111.0	30.82	5.5		2.14	3		77.6		2.1	
	133.2	36.99	4.5		2.16	3		75.5		2.7	
EA100/16 C	62.3	17.30	6.0		1.58	2.2	Y2-90L-4 2.2KW	64.5	145	2	
	103.8	28.84	4.8		1.78	2.2		76		2.1	
	124.6	34.60	3.9		1.81	2.2		73		2.7	
EA100/20	85.2	23.66	14.9		4.94	7.5	Y2-160M-4 11KW	70	214	1.7	
	142.0	39.44	13.0		6.28	7.5		80		1.9	
	170.4	47.33	11.1		6.86	11		75		2.2	
EA100/20 A	81.6	22.67	13.4		1450	4.25	5.5	Y2-132M-4 7.5KW	70	205	1.7
	136.0	37.78	11.5			5.39	7.5		79		1.9
	163.2	45.34	9.8			5.77	7.5		75.5		2.2

EA系列卧式单级单吸离心泵 性能参数表

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		电机型号	效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	Motor Model	%	mm	m
EA100/20 B	77.6	21.56	12.1	1450	3.77	5.5	Y2-132S-4 5.5KW	68	195	1.7
	129.4	35.94	10.0		4.57	5.5		77		1.9
	155.3	43.13	8.3		4.74	5.5		74		2.2
EA100/20 C	73.6	20.46	10.8		3.23	4	Y2-132S-4 5.5KW	67	185	1.7
	122.7	34.10	8.7		3.85	5.5		75.5		1.9
	147.3	40.91	7.1		4.01	5.5		71		2.2
EA100/20 D	69.7	19.35	9.5		2.86	4	Y2-112 M-4 4KW	63	175	1.7
	116.1	32.25	7.3		3.14	4		73.5		1.9
	139.3	38.70	5.7		3.18	4		68		2.2
EA100/20 E	65.7	18.25	8.3		2.47	3	Y2-100L-4 3KW	60	165	1.7
	109.5	30.41	6.1		2.57	3		70.8		1.9
	131.4	36.49	4.5		2.60	3		62		2.2
EA100/26	88.8	24.67	24.7	8.91	11	Y2-160L-4 15KW	67	264	1.8	
	148.0	41.11	22.0	11.36	15		78		2	
	177.6	49.33	19.6	12.63	15		75		2.3	
EA100/26 A	85.8	23.83	22.8	8.01	11	Y2-160L-4 15KW	66.5	255	1.8	
	143.0	39.71	20.4	10.38	15		76.5		2	
	171.5	47.65	18.0	11.44	15		73.5		2.3	
EA100/26 B	82.4	22.89	21.1	7.17	7.5	Y2-160M-4 11KW	66	245	1.8	
	137.3	38.15	18.8	9.39	11		75		2	
	164.8	45.78	16.6	10.21	11		73		2.3	
EA100/26 C	79.0	21.96	19.3	6.39	7.5	Y2-160M-4 11KW	65	235	1.8	
	131.7	36.59	17.0	8.29	11		73.5		2	
	158.1	43.91	14.9	9.03	11		71		2.3	
EA100/26 D	75.7	21.02	17.6	5.85	7.5	Y2-160M-4 11KW	62	225	1.8	
	126.1	35.04	15.3	7.30	11		72		2	
	151.4	42.04	13.2	7.88	11		69		2.3	
EA100/26 E	72.3	20.09	16.0	5.08	7.5	Y2-160M-4 11KW	62	215	1.8	
	120.5	33.48	13.6	6.20	7.5		72		2	
	144.6	40.18	11.5	6.61	11		68.5		2.3	
EA100/26 F	69.0	19.15	14.4	4.58	7.5	Y2-132M-4 7.5KW	59	205	1.8	
	114.9	31.92	12.0	5.52	7.5		68		2	
	137.9	38.31	10.0	5.87	7.5		64		2.3	
EA100/32	81.0	22.50	38.0	12.32	15	Y2-180L-4 22KW	68	329	2	
	135.0	37.50	34.0	16.10	22		77.6		2.2	
	162.0	45.00	30.2	18.24	22		73		2.7	
EA100/32 A	77.6	21.54	34.4	10.84	15	Y2-180L-4 22KW	67	315	2	
	129.3	35.90	31.0	14.31	18.5		76.2		2.2	
	155.1	43.09	27.6	16.19	22		72		2.7	
EA100/32 B	73.9	20.52	31.1	9.47	15	Y2-180M-4 18.5KW	66	300	2	
	123.1	34.19	28.0	12.68	18.5		74		2.2	
	147.7	41.03	25.0	14.16	18.5		71		2.7	
EA100/32 C	70.2	19.49	28.2	8.29	11	Y2-160L-4 15KW	65	285	2	
	116.9	32.48	25.0	11.13	15		71.5		2.2	
	140.3	38.98	22.1	12.70	15		66.5		2.7	
EA100/32 D	66.5	18.47	25.7	7.50	11	Y2-160L-4 15KW	62	270	2	
	110.8	30.78	22.3	9.89	11		68		2.2	
	132.9	36.93	19.8	11.13	15		64.5		2.7	
EA100/32 E	62.8	17.44	22.9	6.64	11	Y2-160L-4 15KW	59	255	2	
	104.6	29.07	19.8	8.68	11		65		2.2	
	125.6	34.88	16.8	9.57	15		60		2.7	
EA100/40	90.7	25.20	56.8	22.62	30	Y2-225M-4 45KW	62	409	1.5	
	151.2	42.00	51.8	30.03	37		71		1.8	
	181.4	50.40	47.0	34.39	45		67.5		2.1	
EA100/40 A	87.6	24.34	52.4	20.49	30	Y2-225S-4 37KW	61	395	1.5	
	146.0	40.56	47.4	27.11	37		69.5		1.8	
	175.2	48.67	42.6	30.79	37		66		2.1	

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		电机型号	效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	Motor Model	%	mm	m
EA100/40 B	84.3	23.41	48.2	1450	18.43	30	Y2-225S-4 37KW	60	380	1.5
	140.5	39.02	43.4		24.77	37		67		1.8
	168.6	46.83	38.8		27.18	37		65.5		2.1
EA100/40 C	81.0	22.49	44.5		16.91	22	Y2-200L-4 30KW	58	365	1.5
	134.9	37.48	39.5		21.82	30		66.5		1.8
	161.9	44.98	35.0		24.11	30		64		2.1
EA100/40 D	77.6	21.56	40.6		14.92	18.5	Y2-200L-4 30KW	57.5	350	1.5
	129.4	35.94	35.9		19.45	22		65		1.8
	155.3	43.13	31.7		21.44	30		62.5		2.1
EA100/40 E	74.3	20.64	37.5		13.55	18.5	Y2-180L-4 22KW	56	335	1.5
	123.8	34.40	32.9		17.33	22		64		1.8
	148.6	41.28	28.8		19.10	22		61		2.1
EA100/40 F	71.0	19.72	34.0		11.94	15	Y2-180L-4 22KW	55	320	1.5
	118.3	32.86	29.8		15.23	18.5		63		1.8
	142.0	39.43	25.8		16.90	22		59		2.1
EA125/20	114.5	31.80	15.0	1450	7.54	11	Y2-160M-4 11KW	62	214	1.3
	190.8	53.00	13.3		8.74	11		79		1.7
	229.0	63.60	11.7		9.29	11		78.5		1.85
EA125/20 A	109.7	30.46	13.3		6.51	11	Y2-160M-4 11KW	61	205	1.3
	182.8	50.77	11.5		7.43	11		77		1.7
	219.3	60.93	9.9		7.78	11		76		1.85
EA125/20 B	104.3	28.98	11.7		5.63	7.5	Y2-132M-4 7.5KW	59	195	1.3
	173.9	48.29	9.7		6.12	7.5		75		1.7
	208.6	57.95	8.1		6.39	7.5		72		1.85
EA125/20 C	99.0	27.49	10.2		4.74	7.5	Y2-132M-4 7.5KW	58	185	1.3
	164.9	45.82	8.0		5.13	7.5		70		1.7
	197.9	54.98	6.3		5.14	7.5		66		1.85
EA125/26	144.0	40.00	24.0		13.25	18.5	Y2-180L-4 22KW	71	264	2.2
	240.0	66.67	22.2		17.27	22		84		2.8
	288.0	80.00	20.5		19.25	22		83.5		3.3
EA125/26 A	139.1	38.64	21.9	11.68	15	Y2-180L-4 22KW	71	255	2.2	
	231.8	64.40	20.1	15.19	18.5		83.5		2.8	
	278.2	77.28	18.3	16.70	22		83		3.3	
EA125/26 B	133.6	37.12	20.0	10.39	15	Y2-180M-4 18.5KW	70	245	2.2	
	222.7	61.87	18.3	13.37	18.5		83		2.8	
	267.3	74.25	16.5	14.73	18.5		81.5		3.3	
EA125/26 C	128.2	35.61	18.3	9.12	11	Y2-160L-4 15KW	70	235	2.2	
	213.6	59.35	16.4	11.78	15		81		2.8	
	256.4	71.22	14.5	12.65	15		80		3.3	
EA125/26 D	122.7	34.09	16.6	8.04	11	Y2-160L-4 15KW	69	225	2.2	
	204.6	56.82	14.4	10.02	15		80		2.8	
	245.5	68.19	12.4	10.83	15		76.5		3.3	
EA125/26 E	117.3	32.58	14.9	7.00	11	Y2-160L-4 15KW	68	215	2.2	
	195.5	54.30	12.7	8.66	11		78		2.8	
	234.6	65.15	10.7	9.36	15		73		3.3	
EA125/26 F	111.8	31.06	13.3	6.04	7.5	Y2-160M-4 11KW	67	205	2.2	
	186.4	51.77	11.0	7.44	11		75		2.8	
	223.6	62.12	9.0	8.00	11		68.5		3.3	
EA125/32	120.1	33.36	35.0	1450	17.60	22	Y2-200L-4 30KW	65	329	1.7
	200.2	55.60	32.7		22.41	30		79.5		2.2
	240.2	66.72	30.8		24.86	30		81		2.7
EA125/32 A	115.0	31.94	31.9		15.36	18.5	Y2-200L-4 30KW	65	315	1.7
	191.6	53.23	29.9		19.75	30		79		2.2
	230.0	63.88	28.2		22.07	30		80		2.7
EA125/32 B	109.5	30.42	29.0		13.40	18.5	Y2-180L-4 22KW	64.5	300	1.7
	182.5	50.70	27.0		17.09	22		78.5		2.2
	219.0	60.84	25.5		19.00	22		80		2.7

EA系列卧式单级单吸离心泵 性能参数表

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		电机型号 Motor Model	效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r	
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor		%	mm	m	
EA125/32 C	104.0	28.90	26.2	1450	11.59	15	Y2-180M-4 18.5KW	64	285	1.7	
	173.4	48.16	24.4		14.77	18.5		78		2.2	
	208.1	57.80	22.9		16.21	18.5		80		2.7	
EA125/32 D	98.6	27.38	23.2		9.73	11	Y2-160L-4 15KW	64	270	1.7	
	164.3	45.63	21.4		12.59	15		76		2.2	
	197.1	54.76	19.9		13.69	15		78		2.7	
EA125/32 E	93.1	25.86	20.6		8.42	11	Y2-160L-4 15KW	62	255	1.7	
	155.1	43.09	18.8		10.73	15		74		2.2	
	186.2	51.71	17.3		11.54	15		76		2.7	
EA125/40	147.0	40.83	56.6		1450	34.84	45	Y2-280S-4 75KW	65	409	1.5
	245.0	68.05	52.5			47.00	55		74.5		2.8
	294.0	81.66	48.7			52.67	75		74		4
EA125/40 A	142.0	39.43	51.9	31.34		37	Y2-250M-4 55KW	64	395	1.5	
	236.6	65.72	47.6	42.00		55		73		2.8	
	283.9	78.86	43.8	46.69		55		72.5		4	
EA125/40 B	136.6	37.93	47.7	28.15		37	Y2-225M-4 45KW	63	380	1.5	
	227.6	63.22	43.1	37.35		45		71.5		2.8	
	273.1	75.87	39.7	41.57		45		71		4	
EA125/40 C	131.2	36.44	43.4	25.00		30	Y2-225M-4 45KW	62	365	1.5	
	218.6	60.73	39.8	33.36		37		71		2.8	
	262.4	72.88	36.5	37.24		45		70		4	
EA125/40 D	125.8	34.94	39.9	22.40		30	Y2-225S-4 37KW	61	350	1.5	
	209.6	58.23	36.6	30.27		37		69		2.8	
	251.6	69.88	33.2	33.44		37		68		4	
EA125/40 E	120.4	33.44	36.8	20.10		30	Y2-225S-4 37KW	60	335	1.5	
	200.7	55.74	33.5	27.31		30		67		2.8	
	240.8	66.89	30.1	29.45		37		67		4	
EA125/40 F	115.0	31.95	33.3	17.67	22	Y2-200L-4 30KW	59	320	1.5		
	191.7	53.24	30.1	23.80	30		66		2.8		
	230.0	63.89	27.0	26.01	30		65		4		
EA125/50	172.8	48.00	95.1	75.82	90	Y2-315L1-4 160KW	59	525	2		
	288.0	80.00	93.8	103.58	132		71		2.6		
	345.6	96.00	91.0	118.09	160		72.5		3.9		
EA125/50 A	164.6	45.71	86.7	65.83	75	Y2-315M-4 132KW	59	500	2		
	274.3	76.19	85.5	90.55	110		70.5		2.6		
	329.1	91.43	83.1	102.70	132		72.5		3.9		
EA125/50 B	156.3	43.43	78.1	56.82	75	Y2-315S-4 110KW	58.5	475	2		
	260.6	72.38	76.8	77.82	90		70		2.6		
	312.7	86.86	74.6	88.19	110		72		3.9		
EA125/50 C	148.1	41.14	69.9	48.59	55	Y2-315S-4 90KW	58	450	2		
	246.9	68.57	68.5	66.71	75		69		2.6		
	296.2	82.29	66.6	74.59	90		72		3.9		
EA125/50 D	139.9	38.86	61.9	41.35	55	Y2-280S-4 75KW	57	425	2		
	233.1	64.76	60.7	56.24	75		68.5		2.6		
	279.8	77.71	59.0	62.85	75		71.5		3.9		
EA125/50 E	131.7	36.57	54.2	34.08	45	Y2-280S-4 75KW	57	400	2		
	219.4	60.95	52.8	47.07	55		67		2.6		
	263.3	73.14	51.4	51.89	75		71		3.9		
EA150/20	216.0	60.00	14.1	1450	13.37	18.5	Y2-180M-4 18.5KW	62	214	3	
	360.0	100.00	12.2		14.95	18.5		80		3.5	
	432.0	120.00	10.6		16.51	18.5		75.5		4	
EA150/20 A	206.9	57.48	12.8		11.82	15	Y2-180M-4 18.5KW	61	205	3	
	344.9	95.79	10.8		13.00	15		78		3.5	
	413.8	114.95	9.2		14.20	18.5		73		4	
EA150/20 B	196.8	54.67	11.5		10.44	15	Y2-160L-4 15KW	59	195	3	
	328.0	91.12	9.5		11.24	15		75.5		3.5	
	393.6	109.35	7.8		11.94	15		70		4	

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		电机型号	效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	Motor Model	%	mm	m
EA150/20 C	186.7	51.87	10.2	1450	9.10	11	Y2-160L-4 15KW	57	185	3
	311.2	86.45	8.2		9.78	15		71		3.5
	373.5	103.74	6.6		10.32	15		65		4
EA150/20 D	176.6	49.07	8.9		8.07	11	Y2-160M-4 11KW	53	175	3
	294.4	81.78	6.9		8.38	11		66		3.5
	353.3	98.13	5.3		8.64	11		59		4
EA150/26	194.4	54.00	23.1		16.98	22	Y2-200L-4 30KW	72	264	1.7
	324.0	90.00	21.0		22.73	30		81.5		2.1
	388.8	108.00	17.9		25.26	30		75		4
EA150/26 A	187.8	52.16	21.2		15.05	18.5	Y2-200L-4 30KW	72	255	1.7
	313.0	86.93	18.9		20.38	30		79		2.1
	375.5	104.32	15.6		22.15	30		72		4
EA150/26 B	180.4	50.11	19.3	13.35	18.5	Y2-180L-4 22KW	71	245	1.7	
	300.7	83.52	16.7	17.75	22		77		2.1	
	360.8	100.23	13.4	19.36	22		68		4	
EA150/26 C	173.0	48.07	17.6	11.84	15	Y2-180M-4 18.5KW	70	235	1.7	
	288.4	80.11	14.7	15.49	18.5		74.5		2.1	
	346.1	96.14	11.2	16.49	18.5		64		4	
EA150/26 D	165.7	46.02	15.9	10.70	15	Y2-180M-4 18.5KW	67	225	1.7	
	276.1	76.70	12.6	13.15	18.5		72		2.1	
	331.4	92.05	9.3	14.22	18.5		59		4	
EA150/26 E	158.3	43.98	14.2	9.42	11	Y2-160L-4 15KW	65	215	1.7	
	263.9	73.30	10.3	11.56	15		64		2.1	
	316.6	87.95	7.1	12.00	15		51		4	
EA150/32	222.0	61.67	36.0	29.80	37	Y2-250M-4 55KW	73	329	2.1	
	370.0	102.78	34.0	40.53	55		84.5		3	
	444.0	123.34	31.2	45.16	55		83.5		4	
EA150/32 A	212.6	59.04	32.7	25.92	30	Y2-225M-4 45KW	73	315	2.1	
	354.3	98.41	30.3	35.21	45		83		3	
	425.1	118.09	27.1	38.72	45		81		4	
EA150/32 B	202.4	56.23	29.3	22.43	30	Y2-225S-4 37KW	72	300	2.1	
	337.4	93.72	26.6	30.16	37		81		3	
	404.9	112.46	23.4	32.65	37		79		4	
EA150/32 C	192.3	53.42	26.2	19.32	22	Y2-200L-4 30KW	71	285	2.1	
	320.5	89.03	23.0	25.40	30		79		3	
	384.6	106.84	19.7	27.14	30		76		4	
EA150/32 D	182.2	50.61	23.2	16.44	22	Y2-200L-4 30KW	70	270	2.1	
	303.7	84.35	19.8	21.26	30		77		3	
	364.4	101.22	16.5	22.42	30		73		4	
EA150/32 E	172.1	47.80	20.2	13.71	18.5	Y2-180L-4 22KW	69	255	2.1	
	286.8	79.66	16.6	17.28	22		75		3	
	344.1	95.59	13.0	17.65	22		69		4	
EA150/40	231.0	64.16	54.5	51.15	75	Y2-280M-4 90KW	67	409	2	
	385.0	106.94	49.5	63.65	75		81.5		3.3	
	462.0	128.33	43.9	70.78	90		78		4.6	
EA150/40 A	223.1	61.97	50.0	46.01	55	Y2-280S-4 75KW	66	395	2	
	371.8	103.28	45.3	57.31	75		80		3.3	
	446.2	123.94	39.8	62.78	75		77		4.6	
EA150/40 B	214.6	59.61	46.0	40.72	55	Y2-280S-4 75KW	66	380	2	
	357.7	99.36	41.4	51.03	75		79		3.3	
	429.2	119.23	36.0	55.35	75		76		4.6	
EA150/40 C	206.1	57.26	42.4	36.05	45	Y2-250M-4 55KW	66	365	2	
	343.6	95.44	37.7	45.79	55		77		3.3	
	412.3	114.52	32.8	49.75	55		74		4.6	
EA150/40 D	197.7	54.91	38.6	31.95	37	Y2-225M-4 45KW	65	350	2	
	329.4	91.51	34.1	40.24	45		76		3.3	
	395.3	109.82	29.6	42.19	45		75.5		4.6	

EA系列卧式单级单吸离心泵 性能参数表


型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		电机型号 Motor Model	效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	%	mm	m	
EA150/40 E	189.2	52.55	35.4	1450	28.49	37	Y2-225M-4 45KW	64	335	2
	315.3	87.59	31.2		36.69	45		73		3.3
	378.4	105.11	27.0		38.63	45		72		4.6
EA150/40 F	180.7	50.20	32.1		24.87	30	Y2-225S-4 37KW	63.5	320	2
	301.2	83.67	28.4		31.90	37		73		3.3
	361.5	100.40	24.4		33.35	37		72		4.6
EA150/50	289.4	80.40	98.0	115.25	132	Y2-315L2-4 200KW	67	525	2.2	
	482.4	134.00	93.8	156.91	200		78.5		4.1	
	578.9	160.80	89.5	178.53	200		79		6	
EA150/50 A	275.7	76.57	88.9	100.32	132	Y2-315L1-4 160KW	66.5	500	2.2	
	459.4	127.62	84.8	135.97	160		78		4.1	
	551.3	153.14	80.5	154.89	160		78		6	
EA150/50 B	261.9	72.74	80.3	86.73	110	Y2-315L1-4 160KW	66	475	2.2	
	436.5	121.24	75.8	118.50	160		76		4.1	
	523.7	145.49	71.7	134.51	160		76		6	
EA150/50 C	248.1	68.91	72.0	74.81	90	Y2-315M1-4 132KW	65	450	2.2	
	413.5	114.86	67.3	101.00	132		75		4.1	
	496.2	137.83	63.2	113.82	132		75		6	
EA150/50 D	234.3	65.09	63.4	63.19	75	Y2-315S-4 110KW	64	425	2.2	
	390.5	108.48	58.9	84.61	110		74		4.1	
	468.6	130.17	55.0	94.81	110		74		6	
EA150/50 E	220.5	61.26	55.8	53.17	75	Y2-280M-4 90KW	63	400	2.2	
	367.5	102.10	51.8	71.98	90		72		4.1	
	441.1	122.51	48.4	79.60	90		73		6	
EA200/26	259.2	72.00	20.4	23.22	30	Y2-200L-4 30KW	62	288	3	
	432.0	120.00	16.1	23.67	30		80		4.5	
	518.4	144.00	12.8	23.77	30		76		5.5	
EA200/26 A	243.0	67.50	16.8	18.52	22	Y2-180L-4 22KW	60	270	3	
	405.0	112.50	13.2	19.15	22		76		4.5	
	486.0	135.00	10.4	19.38	22		71		5.5	
EA200/26 B	229.5	63.75	13.3	14.58	18.5	Y2-180M-4 18.5KW	57	255	3	
	382.5	106.25	10.1	15.02	18.5		70		4.5	
	459.0	127.50	7.5	15.11	18.5		62		5.5	
EA200/32	378.0	105.00	32.1	45.25	55	Y2-280S-4 75KW	73	329	3.5	
	630.0	175.00	27.9	56.96	75		84		4	
	756.0	210.00	23.6	61.87	75		78.5		4.7	
EA200/32 A	361.9	100.53	29.2	39.96	45	Y2-250M-4 55KW	72	315	3.5	
	603.2	167.55	25.0	50.06	55		82		4	
	723.8	201.06	21.0	53.74	55		77		4.7	
EA200/32 B	344.7	95.74	26.7	36.31	45	Y2-250M-4 55KW	69	300	3.5	
	574.5	159.57	23.2	44.79	55		81		4	
	689.4	191.49	20.0	47.81	55		78.5		4.7	
EA200/32 C	327.4	90.96	24.0	31.93	37	Y2-225M-4 45KW	67	285	3.5	
	545.7	151.60	20.1	37.80	45		79		4	
	654.9	181.91	16.8	39.93	45		75		4.7	
EA200/32 D	310.2	86.17	21.5	27.93	37	Y2-225S-4 37KW	65	270	3.5	
	517.0	143.62	17.7	32.78	37		76		4	
	620.4	172.34	14.6	34.01	37		72.5		4.7	
EA200/32 E	293.0	81.38	19.0	24.44	30	Y2-225S-4 37KW	62	255	3.5	
	488.3	135.64	15.6	28.41	37		73		4	
	586.0	162.77	12.7	28.94	37		70		4.7	
EA200/40	391.0	108.60	55.5	80.91	90	Y2-315M1-4 132KW	73	409	3.1	
	651.6	181.00	49.5	104.53	132		84		3.9	
	781.9	217.20	41.8	112.63	132		79		4.9	
EA200/40 A	377.6	104.88	51.7	73.81	90	Y2-315S-4 110KW	72	395	3.1	
	629.3	174.80	45.7	94.32	110		83		3.9	
	755.2	209.77	38.2	101.98	110		77		4.9	

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		电机型号 Motor Model	效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor		%	mm	m
EA200/40 B	363.2	100.90	47.7	1450	66.43	75	Y2-315S-4 110KW	71	380	3.1
	605.4	168.17	42.0		83.39	110		83		3.9
	726.5	201.80	34.7		89.70	110		76.5		4.9
EA200/40 C	348.9	96.92	43.3		58.75	75	Y2-280M-4 90KW	70	365	3.1
	581.5	161.53	37.7		72.78	90		82		3.9
	697.8	193.83	31.0		78.52	90		75		4.9
EA200/40 D	334.6	92.93	39.7		52.40	75	Y2-280S-4 75KW	69	350	3.1
	557.6	154.89	34.3		65.08	75		80		3.9
	669.1	185.87	27.4		69.32	75		72		4.9
EA200/40 E	320.2	88.95	36.4		47.36	55	Y2-280S-4 75KW	67	335	3.1
	533.7	148.25	31.0		56.65	75		79.5		3.9
	640.4	177.90	24.0		60.64	75		69		4.9
EA200/40 F	305.9	84.97	33.4		42.79	55	Y2-280S-4 75KW	65	320	3.1
	509.8	141.61	28.2		51.50	75		76		3.9
	611.8	169.94	21.5		54.25	75		66		4.9
EA200/50	414.7	115.20	88.5		153.71	200	Y2-355M-4 250KW	65	525	2
	691.2	192.00	84.0		195.13	250		81		3.2
	829.4	230.40	80.2		219.50	250		82.5		4
EA200/50 A	395.0	109.71	80.7	133.49	160	Y2-355M-4 250KW	65	500	2	
	658.3	182.86	76.6	170.52	200		80.5		3.2	
	789.9	219.43	72.8	190.91	250		82		4	
EA200/50 B	375.2	104.23	72.6	115.87	132	Y2-315L2-4 200KW	64	475	2	
	625.4	173.71	69.0	146.83	160		80		3.2	
	750.4	208.46	65.5	163.18	200		82		4	
EA200/50 C	355.5	98.74	64.6	100.83	132	Y2-315L1-4 160KW	62	450	2	
	592.5	164.57	62.0	124.99	160		80		3.2	
	710.9	197.49	59.0	140.97	160		81		4	
EA200/50 D	335.7	93.26	57.7	85.05	110	Y2-315M1-4 132KW	62	425	2	
	559.5	155.43	55.0	106.05	132		79		3.2	
	671.5	186.51	52.0	119.56	132		79.5		4	
EA200/50 E	316.0	87.77	50.5	72.40	90	Y2-315S-4 110KW	60	400	2	
	526.6	146.29	48.3	89.93	110		77		3.2	
	632.0	175.54	45.7	99.52	110		79		4	
EA250/32	493.1	136.98	31.2	67.55	75	Y2-280M-4 90KW	62	329	4.2	
	821.9	228.30	27.0	71.91	90		84		5.2	
	986.3	273.96	24.0	76.71	90		84		5.9	
EA250/32 A	472.1	131.15	28.4	59.84	75	Y2-280S-4 75KW	61	315	4.2	
	786.9	218.59	24.5	62.48	75		84		5.2	
	944.3	262.30	21.0	65.83	75		82		5.9	
EA250/32 B	449.7	124.91	25.3	51.62	75	Y2-280S-4 75KW	60	300	4.2	
	749.4	208.18	21.1	53.14	75		81		5.2	
	899.3	249.81	18.0	55.78	75		79		5.9	
EA250/32 C	427.2	118.66	22.1	45.89	55	Y2-250M-4 55KW	56	285	4.2	
	712.0	197.77	18.0	45.60	55		76.5		5.2	
	854.4	237.32	15.1	46.83	55		75		5.9	
EA250/32 D	404.7	112.42	19.0	39.49	45	Y2-225M-4 45KW	53	270	4.2	
	674.5	187.36	14.8	39.38	45		69		5.2	
	809.4	224.83	12.0	39.46	45		67		5.9	
EA250/32 E	382.2	106.17	15.6	31.21	37	Y2-225S-4 37KW	52	255	4.2	
	637.0	176.95	11.3	30.62	37		64		5.2	
	764.4	212.34	8.8	31.04	37		59		5.9	
EA250/40	529.0	146.94	53.8	103.30	132	Y2-315L1-4 160KW	75	409	3.5	
	881.6	244.90	46.6	127.09	160		88		4.8	
	1058.0	293.88	38.3	136.18	160		81		6.2	
EA250/40 A	510.9	141.91	50.6	94.46	110	Y2-315M1-4 132KW	74.5	395	3.5	
	851.5	236.52	43.4	115.63	132		87		4.8	
	1021.8	283.82	35.6	123.01	132		80.5		6.2	

EA系列卧式单级单吸离心泵 性能参数表

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		电机型号 Motor Model	效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m ³ /h	L/s	m	r/min	轴 Shaft	电机 Motor	Motor Model	%	mm	m
EA250/40 B	491.5	136.52	47.5	1450	85.30	110	Y2-315M1-4 132KW	74.5	380	3.5
	819.1	227.54	41.3		105.85	132		87		4.8
	983.0	273.04	35.0		114.21	132		82		6.2
EA250/40 C	472.1	131.13	43.5		74.54	90	Y2-315S-4 110KW	75	365	3.5
	786.8	218.55	36.9		91.90	110		86		4.8
	944.2	262.26	30.4		97.67	110		80		6.2
EA250/40 D	452.7	125.74	40.0		65.72	75	Y2-315S-4 110KW	75	350	3.5
	754.5	209.57	33.3		82.40	110		83		4.8
	905.4	251.49	27.2		84.86	110		79		6.2
EA250/40 E	433.3	120.35	36.6		58.34	75	Y2-280M-4 90KW	74	335	3.5
	722.1	200.59	30.0		72.36	90		81.5		4.8
	866.6	240.71	23.8		72.91	90		77		6.2
EA250/40 F	414.0	115.00	33.2		52.00	75	Y2-280S-4 75KW	72	320	3.5
	690.0	191.60	27.0		63.30	75		80		4.8
	828.0	230.00	21.2		63.00	75		76		6.2
EA250/50	587.5	163.20	87.5	1450	199.92	250	Y2-355L-4 315KW	70	525	2.5
	979.2	272.00	81.5		260.18	315		83.5		3.7
	1175.0	326.40	75.5		284.12	315		85		4.7
EA250/50 A	559.5	155.43	79.8		176.16	200	Y2-355L-4 315KW	69	500	2.5
	932.6	259.05	74.5		227.05	250		83.3		3.7
	1119.1	310.86	69.0		250.24	315		84		4.7
EA250/50 B	531.6	147.66	75.0		157.29	200	Y2-355M-4 250KW	69	475	2.5
	885.9	246.10	67.5		195.66	250		83.2		3.7
	1063.1	295.31	62.7		216.02	250		84		4.7
EA250/50 C	503.6	139.89	65.0		133.00	160	Y2-315L2-4 200KW	67	450	2.5
	839.3	233.14	60.5		166.54	200		83		3.7
	1007.2	279.77	56.0		182.78	200		84		4.7
EA250/50 D	475.6	132.11	58.0		115.53	132	Y2-315L1-4 160KW	65	425	2.5
	792.7	220.19	53.6		142.79	160		81		3.7
	951.2	264.23	49.3		153.81	160		83		4.7
EA250/50 E	447.6	124.34	50.8		119.04	132	Y2-315L1-4 160KW	79	400	2.5
	746.1	207.24	46.5		119.54	132		79		3.7
	895.3	248.69	42.5		129.47	160		80		4.7
EA300/40	702.0	195.00	49.5	1450	137.09	160	Y2-315L2-4 200KW	69	409	3
	1170.0	325.00	40.8		149.37	200		87		3.5
	1404.0	390.00	38.7		170.01	200		87		4.1
EA300/40 A	678.0	188.33	46.2		125.39	160	Y2-315L1-4 160KW	68	395	3
	1130.0	313.88	40.6		144.38	160		86.5		3.5
	1355.9	376.65	35.5		152.37	160		86		4.1
EA300/40 B	652.2	181.17	43.1		115.95	132	Y2-315L1-4 160KW	66	380	3
	1087.0	301.96	37.6		131.36	160		84.7		3.5
	1304.4	362.35	32.1		135.38	160		84.2		4.1
EA300/40 C	626.5	174.02	39.2		104.46	132	Y2-315M1-4 132KW	64	365	3
	1044.1	290.04	34.0		115.05	132		84		3.5
	1253.0	348.04	29.0		119.17	132		83		4.1
EA300/40 D	600.7	166.87	35.8		95.98	110	Y2-315M1-4 132KW	61	350	3
	1001.2	278.12	30.8		103.64	132		81		3.5
	1201.5	333.74	26.0		105.64	132		80.5		4.1
EA300/40 E	575.0	159.72	32.5		89.25	110	Y2-315S-4 110KW	57	335	3
	958.3	266.20	27.5		91.97	110		78		3.5
	1150.0	319.44	22.4		92.27	110		76		4.1
EA300/40 F	549.2	152.57	29.2		80.85	110	Y2-280M-4 90KW	54	320	3
	915.4	254.28	24.2		81.49	90		74		3.5
	1098.5	305.13	19.9		82.65	90		72		4.1

EA系列卧式单级单吸离心泵 单泵外形尺寸表

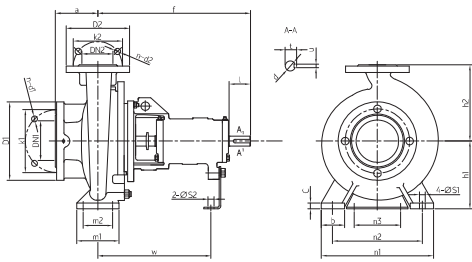


法兰标准尺寸(ISO7005.2
DIN2501 PN16 GB/T17241.6 PN1.6)

DN1/DN2	32	40	50	65	80	100
D1/D2	140	150	165	185	200	220
K1/K2	100	110	125	145	160	180
n-d1/ n-d2	4-φ18	4-φ18	4-φ18	4-φ18	8-φ18	8-φ18

DN1/DN2	125	150	200	250	300	350
D1/D2	250	285	340	405	460	520
K1/K2	210	240	295	355	410	470
n-d1/ n-d2	8-φ18	8-φ22	12-φ22	12-φ26	12-φ26	16-φ26

型号	轴承 内径	出口 DN2	进口 DN1	a	f	h1	h2	b	c	n3	m1	m2	n1	n2	S1	S2	w	d	l	t	u	重量 (千克)
EA32/13	25	32	50	80		112	140				100		190	140								29
EA32/16						132	160	50				100	70	240	190							35
EA32/20						160	180				110	125	95	320	250							47
EA32/26				100	360	180	225	65						210	160							58
EA40/13		40	50	80		112	140				100		190	140			267	24	50	27	8	31
EA40/16						132	160	50				100	70	240	190							34
EA40/20						160	180							265	212							45
EA40/26(H)				100		180	225							320	250							61
EA40/32		65	80	125	470	200	250	65	14	110	125	95	345	280			342	32	80	35	10	107
EA40/32(H)						200	250															94
EA40/32G				100	526	200	250										367	42	110	45	12	105
EA50/13	35	50	65	80		132	160						240	190								35
EA50/16						160	180	50			100	70	265	212			267	24	50	27	8	39
EA50/20						160	200															49
EA50/26(H)				100		180	225	65	18		125	95	320	250			344	32	80	35	10	65
EA50/32(H)		80	100	125	470	225	280				125	95	345	280			342	32	80	35	10	113
EA50/32G						225	280										367	42	110	45	12	105
EA65/13	45	65	80	80		160	180				125	95	280	212			267	24	50	27	8	41
EA65/16						160	200															47
EA65/20(H)				100		180	225				125	95	320	250			339					55
EA65/20G						200	250										342	32	80	35	10	60
EA65/26		100	125	125	470	200	250	80	15		160	120	400	315	18		367	42	110	45	12	87
EA65/32(H)						225	280										342	32	80	35	10	110
EA65/32G				100		225	280				125	95	320	250			367	42	110	45	12	120
EA80/16	55	80	100	125	526	180	225	65	14		160	120	400	315	18		367	42	110	45	12	76
EA80/20						180	250										342	32	80	35	10	95
EA80/26				100		200	280	80	16		160	120	400	315	18		367	42	110	45	12	118
EA80/32(H)						250	315				160	120	440	340			370	42	110	45	12	130
EA80/32G				100		250	315	83	18		160	120	400	315	18		370	42	110	45	12	160
EA100/16		125	150	125	530	280	355	80	15		200	150	500	400	23		370	42	110	45	12	84

EAD系列卧式单级单吸离心泵泵组 机组外形及安装尺寸表

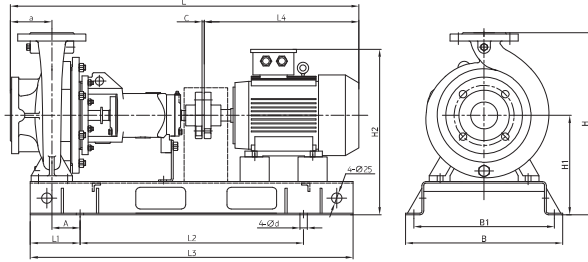

序号	EAD型号	电机(Motor(B3))		水泵安装尺寸(mm)																	重量Weight(kg)		
	Model	型号Model	功率kw	a	L	A	L1	L2	L3	L4	B	B1	H	H1	H2	C	Φd	单泵	电机	机组总重			
1	EAD32/13-02202	Y2-90L-2	2.2	80	788	65	120	480	720	345	360	325	332	192	352	3	19	29	26	70			
2	EAD32/13-01502	Y2-90S-2	1.5	80	763	65	120	480	720	320	360	325	332	192	352	3	19	29	21	66			
3	EAD32/13-01102	Y2-80Z-2	1.1	80	738	65	120	480	720	295	360	325	332	192	332	3	19	29	17	62			
4	EAD32/13-00752	Y2-80L-2	0.75	80	738	65	120	480	720	295	360	325	332	192	332	3	19	29	16	61			
5	EAD32/13-00554	Y2-80L-4	0.55	80	738	65	120	480	720	295	360	325	332	192	332	3	19	29	16	61			
6	EAD32/16-05502	Y2-132S1-2	5.5	80	913	65	120	540	780	470	430	395	372	212	425	3	19	35	65	122			
7	EAD32/16-04002	Y2-112M-2	4	80	843	65	120	480	720	400	360	325	372	212	400	3	19	35	43	93			
8	EAD32/16-03002	Y2-100L-2	3	80	828	65	120	480	720	385	360	325	372	212	382	3	19	35	44	94			
9	EAD32/16-02202	Y2-90L-2	2.2	80	788	65	120	480	720	345	360	325	372	212	372	3	19	35	26	76			
10	EAD32/16-01502	Y2-90S-2	1.5	80	763	65	120	480	720	320	360	325	372	212	372	3	19	35	21	72			
11	EAD32/16-00754	Y2-80Z-4	0.75	80	738	65	120	480	720	295	360	325	372	212	352	3	19	35	17	68			
12	EAD32/16-00554	Y2-80L-4	0.55	80	738	65	120	480	720	295	360	325	372	212	352	3	19	35	16	67			
13	EAD32/20-11002	Y2-160M1-2	11	80	1058	95	150	650	950	615	430	395	420	240	500	3	19	47	108	184			
14	EAD32/20-07502	Y2-132S2-2	7.5	80	913	65	120	540	780	470	430	395	420	240	453	3	19	47	69	140			
15	EAD32/20-05502	Y2-132S1-2	5.5	80	913	65	120	540	780	470	430	395	420	240	453	3	19	47	65	136			
16	EAD32/20-04002	Y2-112M-2	4	80	843	65	120	480	720	400	360	325	420	240	428	3	19	47	43	105			
17	EAD32/20-01104	Y2-90S-4	1.1	80	763	65	120	480	720	320	360	325	420	240	400	3	19	47	22	85			
18	EAD32/20-00754	Y2-80Z-4	0.75	80	738	65	120	480	720	295	360	325	420	240	380	3	19	47	17	80			
19	EAD32/20-00554	Y2-80L-4	0.55	80	738	65	120	480	720	295	360	325	420	240	380	3	19	47	16	79			
20	EAD32/26-18502	Y2-160L-2	18.5	100	1135	84.5	150	650	950	670	430	395	485	260	520	3	19	58	133	222			
21	EAD32/26-15002	Y2-160M2-2	15	100	1080	84.5	150	650	950	615	430	395	485	260	520	3	19	58	109	199			
22	EAD32/26-11002	Y2-160M1-2	11	100	1080	84.5	150	650	950	615	430	395	485	260	520	3	19	58	108	198			
23	EAD32/26-03004	Y2-100L2-4	3	100	850	54.5	120	540	780	385	430	395	485	260	430	3	19	58	37	113			
24	EAD32/26-02204	Y2-100L1-4	2.2	100	850	54.5	120	540	780	385	430	395	485	260	430	3	19	58	34	110			
25	EAD32/26-01504	Y2-90L-4	1.5	100	810	54.5	120	540	780	345	430	395	485	260	420	3	19	58	27	103			
26	EAD40/13-04002	Y2-112M-2	4	80	843	65	120	480	720	400	360	325	332	192	380	3	19	31	43	88			
27	EAD40/13-03002	Y2-100L-2	3	80	828	65	120	480	720	385	360	325	332	192	362	3	19	31	44	90			
28	EAD40/13-02202	Y2-90L-2	2.2	80	788	65	120	480	720	345	360	325	332	192	352	3	19	31	26	72			
29	EAD40/13-01502	Y2-90S-2	1.5	80	763	65	120	480	720	320	360	325	332	192	352	3	19	31	21	68			
30	EAD40/13-00554	Y2-80L-4	0.55	80	738	65	120	480	720	295	360	325	332	192	332	3	19	31	16	63			
31	EAD40/16-07502	Y2-132S2-2	7.5	80	913	65	120	540	780	470	430	395	372	212	425	3	19	34	69	125			
32	EAD40/16-05502	Y2-132S1-2	5.5	80	913	65	120	540	780	470	430	395	372	212	425	3	19	34	65	121			
33	EAD40/16-04002	Y2-112M-2	4	80	843	65	120	480	720	400	360	325	372	212	400	3	19	34	43	92			
34	EAD40/16-03002	Y2-100L-2	3	80	828	65	120	480	720	385	360	325	372	212	382	3	19	34	44	93			
35	EAD40/16-01104	Y2-90S-4	1.1	80	763	65	120	480	720	320	360	325	372	212	372	3	19	34	22	72			
36	EAD40/16-00754	Y2-80Z-4	0.75	80	738	65	120	480	720	295	360	325	372	212	352	3	19	34	17	67			
37	EAD40/16-00554	Y2-80L-4	0.55	80	738	65	120	480	720	295	360	325	372	212	352	3	19	34	16	66			
38	EAD40/20-11002	Y2-160M1-2	11	100	1078	95	150	650	950	615	430	395	420	240	500	3	19	45	108	182			
39	EAD40/20-07502	Y2-132S2-2	7.5	100	933	65	120	540	780	470	430	395	420	240	453	3	19	45	69	138			
40	EAD40/20-05502	Y2-132S1-2	5.5	100	933	65	120	540	780	470	430	395	420	240	453	3	19	45	65	134			

序号	EAD型号		电机Motor(B3)		水泵安装尺寸(mm)														重量Weight(kg)			
	Model	型号Model	功率kw		a	L	A	L1	L2	L3	L4	B	B1	H	H1	H2	C	Φd	单泵	电机	机组总重	
41	EAD40/20-01504	Y2-90L-4	1.5	100	808	65	120	480	720	345	360	325	420	240	400	3	19	45	27	87		
42	EAD40/20-01104	Y2-90S-4	1.1	100	783	65	120	480	720	320	360	325	420	240	400	3	19	45	22	83		
43	EAD40/20-00754	Y2-80Z-4	0.75	100	758	65	120	480	720	295	360	325	420	240	380	3	19	45	17	78		
44	EAD40/26-22002	Y2-180M-2	22	100	1166	84.5	150	650	950	700	480	445	485	260	535	4	19	61	155	256		
45	EAD40/26-18502	Y2-160L-2	18.5	100	1135	84.5	150	650	950	670	430	395	485	260	520	3	19	61	133	225		
46	EAD40/26-15002	Y2-160M2-2	15	100	1080	84.5	150	650	950	615	430	395	485	260	520	3	19	61	109	202		
47	EAD40/26-11002	Y2-160M1-2	11	100	1080	84.5	150	650	950	615	430	395	485	260	520	3	19	61	108	201		
48	EAD40/26-03004	Y2-100L2-4	3	100	850	54.5	120	540	780	385	430	395	485	260	430	3	19	61	37	116		
49	EAD40/26-02204	Y2-100L1-4	2.2	100	850	54.5	120	540	780	385	430	395	485	260	430	3	19	61	34	113		
50	EAD40/26-01504	Y2-90L-4	1.5	100	810	54.5	120	540	780	345	430	395	485	260	420	3	19	61	27	106		
51	EAD40/32G-45002	Y2-225M-2	45	125	1470	132.5	200	900	1300	815	570	530	555	305	640	4	24	105	286	456		
52	EAD40/32G-37002	Y2-200L2-2	37	125	1425	132.5	200	800	1200	770	520	485	530	280	585	4	19	105	235	387		
53	EAD40/32G-30002	Y2-200L1-2	30	125	1425	132.5	200	800	1200	770	520	485	530	280	585	4	19	105	224	377		
54	EAD40/32G-22002	Y2-180M-2	22	125	1355	132.5	200	720	1120	700	520	485	530	280	555	4	19	105	155	309		
55	EAD40/32H-45002	Y2-225M-2	45	125	1414	132.5	200	900	1300	815	570	530	555	305	640	4	24	94	286	445		
56	EAD40/32H-37002	Y2-200L2-2	37	125	1369	132.5	200	800	1200	770	520	485	530	280	585	4	19	94	235	376		
57	EAD40/32H-30002	Y2-200L1-2	30	125	1369	132.5	200	800	1200	770	520	485	530	280	585	4	19	94	224	366		
58	EAD40/32H-22002	Y2-180M-2	22	125	1299	132.5	200	720	1120	700	520	485	530	280	555	4	19	94	155	309		
59	EAD40/32-07504	Y2-132M-4	7.5	125	1108	82.5	150	650	950	510	480	445	530	280	493	3	19	94	79	206		
60	EAD40/32-05504	Y2-132S-4	5.5	125	1068	82.5	150	650	950	470	480	445	530	280	493	3	19	94	65	193		
61	EAD40/32-04004	Y2-112M-4	4	125	998	82.5	150	650	950	400	480	445	530	280	468	3	19	94	47	174		
62	EAD40/32-03004	Y2-100L2-4	3	125	983	82.5	150	650	950	385	480	445	530	280	450	3	19	94	37	164		
63	EAD50/13-07502	Y2-132S-2	7.5	100	933	65	120	540	780	470	430	395	372	212	425	3	19	35	69	126		
64	EAD50/13-05502	Y2-132S1-2	5.5	100	933	65	120	540	780	470	430	395	372	212	425	3	19	35	65	122		
65	EAD50/13-04002	Y2-112M-2	4	100	863	65	120	480	720	400	360	325	372	212	400	3	19	35	43	93		
66	EAD50/13-03002	Y2-100L-2	3	100	848	65	120	480	720	385	360	325	372	212	382	3	19	35	44	94		
67	EAD50/13-01104	Y2-90S-4	1.1	100	783	65	120	480	720	320	360	325	372	212	372	3	19	35	22	73		
68	EAD50/13-00754	Y2-80Z-4	0.75	100	758	65	120	480	720	295	360	325	372	212	352	3	19	35	17	68		
69	EAD50/13-00554	Y2-80L-4	0.55	100	758	65	120	480	720	295	360	325	372	212	352	3	19	35	16	67		
70	EAD50/16-11002	Y2-160M1-2	11	100	1078	95	150	650	950	615	430	395	420	240	500	3	19	39	108	176		
71	EAD50/16-07502	Y2-132S2-2	7.5	100	933	65	120	540	780	470	430	395	420	240	453	3	19	39	69	132		
72	EAD50/16-05502	Y2-132S1-2	5.5	100	933	65	120	540	780	470	430	395	420	240	453	3	19	39	65	128		
73	EAD50/16-04002	Y2-112M-2	4	100	863	65	120	480	720	400	360	325	420	240	428	3	19	39	43	97		
74	EAD50/16-01504	Y2-90L-4	1.5	100	808	65	120	480	720	345	360	325	420	240	400	3	19	39	27	81		
75	EAD50/16-01104	Y2-90S-4	1.1	100	783	65	120	480	720	320	360	325	420	240	400	3	19	39	22	77		
76	EAD50/16-00754	Y2-80Z-4	0.75	100	758	65	120	480	720	295	360	325	420	240	380	3	19	39	17	72		
77	EAD50/16-00554	Y2-80L-4	0.55	100	758	65	120	480	720	295	360	325	420	240	380	3	19	39	16	71		
78	EAD50/20-18502	Y2-160L-2	18.5	100	1136	98	150	650	950	670	430	395	440	240	500	3	19	49	133	210		
79	EAD50/20-15002	Y2-160M2-2	15	100	1081	98	150	650	950	615	430	395	440	240	500	3	19	49	109	187		
80	EAD50/20-11002	Y2-160M1-2	11	100	1081	98	150	650	950	615	430	395	440	240	500	3	19	49	108	186		
81	EAD50/20-07502	Y2-132S2-2	7.5	100	936	68	120	540	780	470	430	395	440	240	453	3	19	49	69	142		
82	EAD50/20-02204	Y2-100L1-4	2.2	100	851	68	120	480	720	385	360	325	440	240	410	3	19	49	34	98		
83	EAD50/20-01504	Y2-90L-4	1.5	100	811	68	120	480	720	345	360	325	440	240	400	3	19	49	27	91		
84	EAD50/20-01104	Y2-90S-4	1.1	100	786	68	120	480	720	320	360	325	440	240	400	3	19	49	22	87		
85	EAD50/26G-37002	Y2-200L2-2	37	100	1344	132.5	200	800	1200	770	520	485	505	280	585	4	19	65	235	351		
86	EAD50/26G-30002	Y2-200L1-2	30	100	1344	132.5	200	800	1200	770	520	485	505	280	585	4	19	65	224	341		
87	EAD50/26G-22002	Y2-180M-2	22	100	1274	132.5	200	720	1120	700	520	485	485	260	535	4	19	65	155	265		
88	EAD50/26H-37002	Y2-200L2-2	37	100	1237	135.5	200	720	1120	770	520	485	505	280	585	4	19	68	235	352		
89	EAD50/26-30002	Y2-200L1-3	30	100	1237	135.5	200	720	1120	770	520	485	505	280	585	4	19	68	224	342		
90	EAD50/26-22002	Y2-180M-2	22	100	1167	85.5	150	650	950	700	480	445	485	260	535	4	19	68	155	263		
91	EAD50/26-18502	Y2-160L-2	18.5	100	1136	85.5	150	650	950	670	430	395	485	260	520	3	19	68	133	232		
92	EAD50/26-05504	Y2-132S-4	5.5	100	936	85.5	150	650	950	470	430	395	485	260	473	3	19	68	65	165		
93	EAD50/26-04004	Y2-112M-4	4	100	866	55.5	120	540	780	400	430	395	485	260	448	3	19	68	47	133		
94	EAD50/26-03004	Y2-100L2-4	3	100	851	55.5	120	540	780	385	430	395	485	260	430	3	19	68	37	123		
95	EAD50/32G-75002	Y2-280S-2	75	125	1640	182.5	250	950	1450	985	670	630	640	360	760	4	24	105	485	685		
96	EAD50/32G-55002	Y2-250M-2	55	125	1565	182.5	250	860	1360	910	630	590	610	330	695	4	24	105	373	567		
97	EAD50/32G-45002	Y2-225M-2	45	125	1470	132.5	200	900	1300	815	570	530	585	305	640	4	24	105	286	450		
98	EAD50/32G-37002	Y2-200L2-2	37	125	1425	132.5	200	800	1200	770	520	485	585	305	610	4	19	105	235	391		
99	EAD50/32G-30002	Y2-200L1-2	30	125	1425	132.5	200	800	1200	770	520	485	585	305	610	4	19	105	224	381		
100	EAD50/32H-75002	Y2-280S-2	75	100	1559	182.5	250	950	1450	985	670	630	640	360	760	4	24	100	485	680		
101	EAD50/32H-55002	Y2-250M-2	55	100	1484	182.5	250	860	1360	910	630	590	610	330	695	4	24	100	373	562		
102	EAD50/32H-45002	Y2-225M-2	45	100	1389	132.5	200	900	1300	815	570	530	585	305	640	4	24	100	286	445		
103	EAD50/32H-37002	Y2-200L2-2	37	100	1344	132.5	200	800	1200	770	520	485	585	305	610	4	19	100	235	386		
104	EAD50/32H-30002	Y2-200L1-3	30	100	1344	132.5	200	800	1200	770	520	485	585	305	610	4	19	100	224	376		
105	EAD50/32-11004	Y2-160M-4	11	100	1188	132.5	200	720	1120	615	520	485	585	305	565	3	19	100	108	248		

EAD系列卧式单级单吸离心泵泵组 安装尺寸表


序号	EAD型号		电机(Motor(B3))		水泵安装尺寸(mm)																重量Weight(kg)		
	Model	型号Model	功率kw		a	L	A	L1	L2	L3	L4	B	B1	H	H1	H2	C	Φd	单泵	电机	机组总重		
106	EAD50/32-07504	Y2-132M-4	7.5	100	1083	82.5	150	650	950	510	480	445	585	305	518	3	19	100	79	212			
107	EAD50/32-05504	Y2-132S-4	5.5	100	1043	82.5	150	650	950	470	480	445	585	305	518	3	19	100	65	199			
108	EAD65/13-11002	Y2-160M1-2	11	100	1078	82.5	150	650	950	615	430	395	420	240	500	3	19	41	108	178			
109	EAD65/13-07502	Y2-132S2-2	7.5	100	933	52.5	120	540	780	470	430	395	420	240	453	3	19	41	69	134			
110	EAD65/13-05502	Y2-132S1-2	5.5	100	933	52.5	120	540	780	470	430	395	420	240	453	3	19	41	65	130			
111	EAD65/13-01504	Y2-90L-4	1.5	100	808	52.5	120	540	780	345	430	395	420	240	400	3	19	41	27	86			
112	EAD65/13-01104	Y2-90S-4	1.1	100	783	52.5	120	540	780	320	430	395	420	240	400	3	19	41	22	81			
113	EAD65/13-00754	Y2-80Z-4	0.75	100	758	52.5	120	540	780	295	430	395	420	240	380	3	19	41	17	76			
114	EAD65/16-15002	Y2-160M2-2	15	100	1078	82.5	150	650	950	615	430	395	440	240	500	3	19	47	109	185			
115	EAD65/16-11002	Y2-160M1-2	11	100	1078	82.5	150	650	950	615	430	395	440	240	500	3	19	47	108	184			
116	EAD65/16-07502	Y2-132S2-2	7.5	100	933	52.5	120	540	780	470	430	395	440	240	453	3	19	47	69	140			
117	EAD65/16-05502	Y2-132S1-2	5.5	100	933	52.5	120	540	780	470	430	395	440	240	453	3	19	47	65	136			
118	EAD65/16-02204	Y2-100L1-4	2.2	100	848	52.5	120	540	780	385	430	395	440	240	410	3	19	47	34	99			
119	EAD65/16-01504	Y2-90L-4	1.5	100	808	52.5	120	540	780	345	430	395	440	240	400	3	19	47	27	92			
120	EAD65/16-01104	Y2-90S-4	1.1	100	783	52.5	120	540	780	320	430	395	440	240	400	3	19	47	22	87			
121	EAD65/20-30002	Y2-200L1-2	30	100	1234	132.5	200	720	1120	770	520	485	505	280	585	4	19	55	224	329			
122	EAD65/20-22002	Y2-180M-2	22	100	1164	82.5	150	650	950	700	480	445	485	260	535	4	19	55	155	250			
123	EAD65/20-18502	Y2-160L-2	18.5	100	1133	82.5	150	650	950	670	430	395	485	260	520	3	19	55	133	219			
124	EAD65/20-15002	Y2-160M2-2	15	100	1078	82.5	150	650	950	615	430	395	485	260	520	3	19	55	109	196			
125	EAD65/20-04004	Y2-112M-4	4	100	863	52.5	120	540	780	400	430	395	485	260	448	3	19	55	47	120			
126	EAD65/20-03004	Y2-100L2-4	3	100	848	52.5	120	540	780	385	430	395	485	260	430	3	19	55	37	110			
127	EAD65/20-02204	Y2-100L1-4	2.2	100	848	52.5	120	540	780	385	430	395	485	260	430	3	19	55	34	107			
128	EAD65/26-55002	Y2-250M-2	55	100	1484	165	250	860	1360	910	630	590	580	330	695	4	24	87	373	549			
129	EAD65/26-45002	Y2-225M-2	45	100	1389	115	200	900	1300	815	570	530	555	305	640	4	24	87	286	438			
130	EAD65/26-37002	Y2-200L2-2	37	100	1344	115	200	800	1200	770	520	485	530	280	585	4	19	87	235	369			
131	EAD65/26-30002	Y2-200L1-2	30	100	1344	115	200	800	1200	770	520	485	530	280	585	4	19	87	224	359			
132	EAD65/26-07504	Y2-132M-4	7.5	100	1083	65	150	650	950	510	480	445	530	280	493	3	19	87	79	199			
133	EAD65/26-05504	Y2-132S-4	5.5	100	1043	65	150	650	950	470	480	445	530	280	493	3	19	87	65	186			
134	EAD65/26-04004	Y2-112M-4	4	100	973	65	150	650	950	400	480	445	530	280	468	3	19	87	47	167			
135	EAD65/32G-90002	Y2-280M-2	90	125	1690	165	250	950	1450	1035	670	630	640	360	760	4	24	120	541	756			
136	EAD65/32G-75002	Y2-280S-2	75	125	1640	165	250	950	1450	985	670	630	640	360	760	4	24	120	485	700			
137	EAD65/32G-55002	Y2-250M-2	55	125	1565	165	250	860	1360	910	630	590	610	330	695	4	24	120	373	582			
138	EAD65/32G-45002	Y2-225M-2	45	125	1470	115	200	900	1300	815	570	530	585	305	640	4	24	120	286	465			
139	EAD65/32H-50002	Y2-280M-2	90	125	1634	165	250	950	1450	1035	670	630	640	360	760	4	24	110	541	746			
140	EAD65/32H-75002	Y2-280S-2	75	125	1584	165	250	950	1450	985	670	630	640	360	760	4	24	110	485	690			
141	EAD65/32H-55002	Y2-250M-2	55	125	1509	165	250	860	1360	910	630	590	610	330	695	4	24	110	373	572			
142	EAD65/32H-45002	Y2-225M-2	45	125	1414	115	200	900	1300	815	570	530	585	305	640	4	24	110	286	455			
143	EAD65/32-15004	Y2-160L-4	15	125	1268	115	200	720	1120	670	520	485	585	305	565	3	19	110	129	278			
144	EAD65/32-11004	Y2-160M-4	11	125	1213	115	200	720	1120	615	520	485	585	305	565	3	19	110	108	258			
145	EAD65/32-07504	Y2-132M-4	7.5	125	1108	115	200	720	1120	510	520	485	585	305	518	3	19	110	79	228			
146	EAD65/32-05504	Y2-132S-4	5.5	125	1068	115	200	720	1120	470	520	485	585	305	518	3	19	110	65	215			
147	EAD80/16-22002	Y2-180M-2	22	125	1189	82.5	150	650	950	700	480	445	485	260	535	4	19	53	155	248			
148	EAD80/16-18502	Y2-160L-2	18.5	125	1158	82.5	150	650	950	670	430	395	485	260	520	3	19	53	133	217			
149	EAD80/16-15002	Y2-160M2-2	15	125	1103	82.5	150	650	950	615	430	395	485	260	520	3	19	53	109	194			
150	EAD80/16-11002	Y2-160M1-2	11	125	1103	82.5	150	650	950	615	430	395	485	260	520	3	19	53	108	193			
151	EAD80/16-03004	Y2-100L2-4	3	125	873	52.5	120	540	780	385	430	395	485	260	430	3	19	53	37	108			
152	EAD80/16-02204	Y2-100L1-4	2.2	125	873	52.5	120	540	780	385	430	395	485	260	430	3	19	53	34	105			
153	EAD80/16-01504	Y2-90L-4	1.5	125	833	52.5	120	540	780	345	430	395	485	260	420	3	19	53	27	98			
154	EAD80/20-45002	Y2-225M-2	45	125	1414	132.5	200	900	1300	815	570	530	555	305	640	4	24	76	286	427			
155	EAD80/20-37002	Y2-200L2-2	37	125	1369	132.5	200	800	1200	770	520	485	530	280	585	4	19	76	235	362			
156	EAD80/20-30002	Y2-200L1-2	30	125	1369	132.5	200	800	1200	770	520	485	530	280	585	4	19	76	224	352			
157	EAD80/20-22002	Y2-180M-2	22	125	1299	132.5	200	720	1120	700	520	485	510	260	535	4	19	76	155	276			
158	EAD80/20-07504	Y2-132M-4	7.5	125	1108	82.5	150	650	950	510	480	445	510	260	473	3	19	76	79	188			
159	EAD80/20-05504	Y2-132S-4	5.5	125	1068	82.5	150	650	950	470	480	445	510	260	473	3	19	76	65	175			
160	EAD80/20-04004	Y2-112M-4	4	125	998	82.5	150	650	950	400	480	445	510	260	448	3	19	76	47	156			
161	EAD80/20-03004	Y2-100L2-4	3	125	983	82.5	150	650	950	385	480	445	510	260	430	3	19	76	37	146			
162	EAD80/26-75002	Y2-280S-2	75	125	1584	165	250	950	1450	985	670	630	640	360	760	4	24	95	485	675			
163	EAD80/26-55002	Y2-250M-2	55	125	1509	165	250	860	1360	910	630	590	610	330	695	4	24	95	373	557			
164	EAD80/26-45002	Y2-225M-2	45	125	1414	115	200	900	1300	815	570	530	585	305	640	4	24	95	286	446			
165	EAD80/26-37002	Y2-200L2-2	37	125	1369	115	200	900	1300	770	570	530	560	280	585	4	24	95	235	389			
166	EAD80/26-11004	Y2-160M-4	11	125	1213	115	200	720	1120	615	520	485	560	280	540	3	19	95	108	243			
167	EAD80/26-07504	Y2-132M-4	7.5	125	1108	115	200	720	1120	510	520	4											

EAD系列卧式单级单吸离心泵泵组 安装尺寸表

EAZS系列卧式直联式离心泵 产品概述

序号	EAD型号		电机Motor(B3)		水泵安装尺寸(mm)																	重量Weight(kg)	
	Model	型号Model	功率kw		a	L	A	L1	L2	L3	L4	B	B1	H	H1	H2	C	Φd	单泵	电机	机泵总重		
236	EAD125/40-37004	Y2-225S-4	37	160	1514	145	250	860	1360	820	630	590	795	395	730	4	24	178	301	568			
237	EAD125/40-30004	Y2-200L-4	30	160	1464	145	250	860	1360	770	630	590	795	395	700	4	24	178	240	490			
238*	EAD125/50-160004	Y2-315L1-4	160	160	2159	145	250	1300	1810	1325	700	660	920	470	1000	4	24	300	1020	1485			
239*	EAD125/50-132004	Y2-315M-4	132	160	2159	145	250	1200	1740	1325	700	660	920	470	1000	4	24	300	979	1440			
240*	EAD125/50-110004	Y2-315S-4	110	160	2049	145	250	1200	1740	1215	700	660	920	470	1000	4	24	300	836	1297			
241	EAD125/50-90004	Y2-280M-4	90	160	1869	145	250	1140	1650	1035	730	690	885	435	835	4	24	300	587	1008			
242	EAD125/50-75004	Y2-280S-4	75	160	1819	145	250	1140	1650	985	730	690	885	435	835	4	24	300	544	965			
243	EAD150/20-18504	Y2-180M-4	18.5	160	1361	95	200	800	1200	700	520	485	760	360	635	4	19	132	157	341			
244	EAD150/20-15004	Y2-160L-4	15	160	1330	95	200	720	1120	670	520	485	760	360	620	3	19	132	129	300			
245	EAD150/20-11004	Y2-160M-4	11	160	1275	95	200	720	1120	615	520	485	760	360	620	3	19	132	108	280			
246	EAD150/26-30004	Y2-200L-4	30	160	1464	95	200	900	1300	770	570	530	685	330	635	4	24	163	240	468			
247	EAD150/26-22004	Y2-180L-4	22	160	1434	95	200	900	1300	740	570	530	685	330	605	4	24	163	179	407			
248	EAD150/26-18504	Y2-180M-4	18.5	160	1394	95	200	900	1300	700	570	530	685	330	605	4	24	163	157	386			
249	EAD150/26-15004	Y2-160L-4	15	160	1393	95	200	900	1300	700	570	530	685	330	590	3	24	163	129	348			
250	EAD150/32-55004	Y2-250M-4	55	160	1609	146	250	950	1450	910	670	630	760	360	725	4	24	170	383	648			
251	EAD150/32-45004	Y2-225M-4	45	160	1544	146	250	950	1450	845	670	630	760	360	695	4	24	170	312	578			
252	EAD150/32-37004	Y2-225S-4	37	160	1519	146	250	950	1450	820	670	630	760	360	695	4	24	170	301	566			
253	EAD150/32-30004	Y2-200L-4	30	160	1469	146	250	950	1450	770	670	630	760	360	665	4	24	170	240	488			
254	EAD150/32-22004	Y2-180L-4	22	160	1439	146	250	950	1450	740	670	630	760	360	635	4	24	170	179	427			
255	EAD150/40-75004	Y2-280S-4	75	160	1679	145	250	950	1450	985	670	630	845	395	795	4	24	207	544	859			
256	EAD150/40-55004	Y2-250M-4	55	160	1604	145	250	950	1450	910	670	630	845	395	760	4	24	207	383	685			
257	EAD150/40-45004	Y2-225M-4	45	160	1539	145	250	950	1450	845	670	630	845	395	730	4	24	207	312	615			
258	EAD150/40-37004	Y2-225S-4	37	160	1514	145	250	950	1450	820	670	630	845	395	730	4	24	207	301	603			
259*	EAD150/50-200004	Y2-315L2-4	200	180	2179	145	250	1300	1810	1325	700	660	990	490	1020	4	24	330	1102	1597			
260*	EAD150/50-160004	Y2-315L1-4	160	180	2179	145	250	1300	1810	1325	700	660	990	490	1020	4	24	330	1020	1516			
261*	EAD150/50-132004	Y2-315M-4	132	180	2179	145	250	1200	1740	1325	700	660	990	490	1020	4	24	330	979	1471			
262*	EAD150/50-110004	Y2-315S-4	110	180	2069	145	250	1200	1740	1215	700	660	990	490	1020	4	24	330	836	1328			
263	EAD150/50-90004	Y2-280M-4	90	180	1889	145	250	1140	1650	1035	730	690	955	455	855	4	24	330	587	1029			
264	EAD200/26-30004	Y2-200L-4	30	180	1509	145	250	950	1450	770	730	690	845	395	700	4	24	219	240	537			
265	EAD200/26-22004	Y2-180L-4	22	180	1479	145	250	950	1450	740	730	690	845	395	670	4	24	219	179	476			
266	EAD200/26-18504	Y2-180M-4	18.5	180	1439	145	250	950	1450	700	730	690	845	395	670	4	24	219	157	455			
267	EAD200/32-75004	Y2-280S-4	75	180	1839	135	250	1140	1650	985	730	690	875	395	795	4	24	286	544	951			
268	EAD200/32-55004	Y2-250M-4	55	180	1764	135	250	1140	1650	910	730	690	875	395	760	4	24	286	383	777			
269	EAD200/32-45004	Y2-225M-4	45	180	1699	135	250	1140	1650	845	730	690	875	395	730	4	24	286	312	707			
270	EAD200/32-37004	Y2-225S-4	37	180	1674	135	250	1140	1650	820	730	690	875	395	730	4	24	286	301	696			
271	EAD200/32-30004	Y2-200L-4	30	180	1624	135	250	1140	1650	770	730	690	875	395	700	4	24	286	240	617			
272*	EAD200/40-110004	Y2-315S-4	110	180	2070	120	250	1200	1770	1215	700	660	930	450	980	4	24	328	836	1324			
273	EAD200/40-90004	Y2-280M-4	90	180	1890	120	250	1140	1650	1035	730	690	895	415	815	4	24	328	587	1036			
274	EAD200/40-75004	Y2-280S-4	75	180	1840	120	250	1140	1650	985	730	690	895	415	815	4	24	328	544	993			
275	EAD200/40-55004	Y2-250M-4	55	180	1765	120	250	1140	1650	910	730	690	895	415	780	4	24	328	383	819			
276*	EAD200/50-315004	Y2-355L-4	315	200	2455	145	250	1400	1940	1530	800	760	1100	540	1195	5	24	450	1765	2439			
277*	EAD200/50-250004	Y2-355M-4	250	200	2455	145	250	1400	1940	1530	800	760	1100	540	1195	5	24	450	1612	2286			
278*	EAD200/50-200004	Y2-315L2-4	200	200	2249	145	250	1300	1840	1325	720	680	1100	540	1070	4	24	450	1102	1721			
279*	EAD200/50-160004	Y2-315L1-4	160	200	2249	145	250	1300	1840	1325	720	680	1100	540	1070	4	24	450	1020	1640			
280*	EAD200/50-132004	Y2-315M-4	132	200	2249	145	250	1200	1770	1325	720	680	1100	540	1070	4	24	450	979	1595			
281*	EAD200/50-110004	Y2-315S-4	110	200	2139	145	250	1200	1770	1215	720	680	1100	540	1070	4	24	450	836	1452			
282*	EAD250/32-90004	Y2-280M-4	90	220	1950	120	250	1100	1650	1035	700	660	990	470	870	4	24	366	587	1110			
283*	EAD250/32-75004	Y2-280S-4	75	220	1900	120	250	1100	1650	985	700	660	990	470	870	4	24	366	544	1067			
284*	EAD250/32-55004	Y2-250M-4	55	220	1825	120	250	1000	1530	910	670	630	990	470	835	4	24	366	383	893			
285*	EAD250/32-45004	Y2-225M-4	45	220	1760	120	250	1000	1470	845	670	630	990	470	805	4	24	366	312	822			
286*	EAD250/32-37004	Y2-225S-4	37	220	1735	120	250	1000	1470	820	670	630	990	470	805	4	24	366	301	811			
287*	EAD250/40-132004	Y2-315M-4	132	220	2231	120	250	1200	1760	1325	700	660	1075	515	1045	4	24	396	979	1538			
288*	EAD250/40-110004	Y2-315S-4	110	220	2121	120	250	1200	1760	1215	700	660	1075	515	1045	4	24	396	836	1395			
289*	EAD250/40-90004	Y2-280M-4	90	220	1941	120	250	1100	1640	1035	700	660	1075	515	915	4	24	396	587	1141			
290*	EAD250/40-75004	Y2-280S-4	75	220	1891	120	250	1100	1640	985	700	660	1075	515	915	4	24	396	544	1099			
291*	EAD250/50-315004	Y2-355L-4	315	250	2505	125	250	1400	1960	1530	800	760	1240	570	1225	5	24	550	1765	2549			
292*	EAD250/50-250004	Y2-355M-4	250	250	2505	125	250	1400	1960	1530	800	760	1240	570	1225	5	24	550	1612	2396			
293*	EAD250/50-200004	Y2-315L2-4	200	250	2299	125	250	1300	1860	1325	800	760	1240	570	1100	4	24	550	1102	1832			
294*	EAD250/50-160004																						

EAZS Series-50Hz Performance

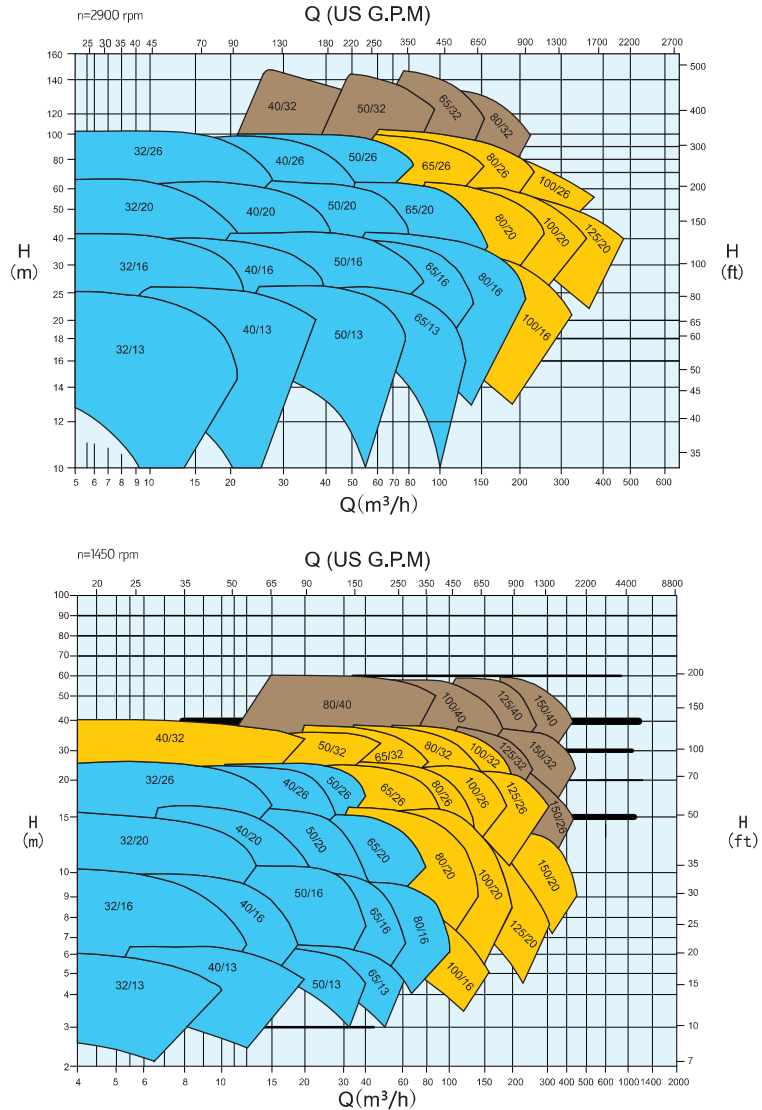

3、泵的结构特点

EAZS系列水泵的水力性能采用本公司EA优秀水力性能设计，其主要部件可以和EA互换，方便客户使用与维护，性能符合DIN24255和ISO9908国际标准。

泵体——采用高效能的蜗壳形式，其法兰连接尺寸标准：GB/T17241.6 PN1.6-1998（铸铁），GB/T9113.1-2000（钢）PN1.6MPa（16bar），可与下列标准同级法兰配合使用：


BS4504、DN2533、ISO7005.1、ISO7005.2。

叶轮——闭式叶轮；采用优秀的水力模型设计；

轴——泵轴采用加大的穿轴式结构，有独立轴承支撑；

轴封——采用机械密封；

轴承——采用全密封免维护轴承。

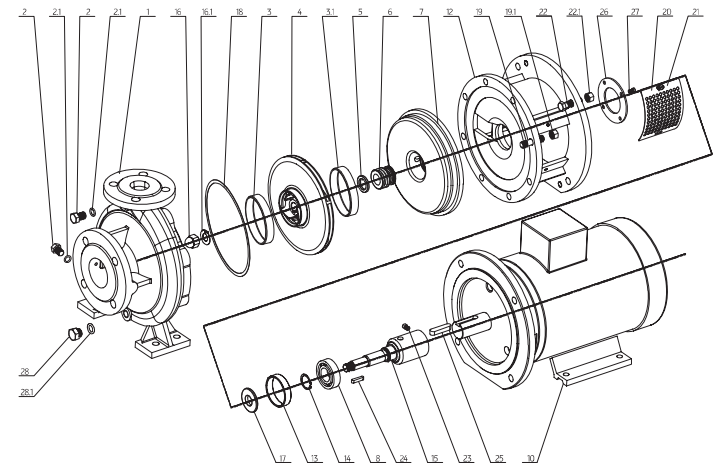

序号	名称	序号	名称	序号	名称
1	泵体	10	B35电机	20	防护罩
2	管堵	12	联接架	21	开槽圆柱头螺钉
2.1	管堵垫片	13	弹性垫	22	螺栓
3	密封环	14	轴用挡圈	22.1	螺母
3.1	密封环	15	轴	23	内六角圆柱端紧定螺钉
4	叶轮	16	叶轮螺母	24	键
5	密封座	16.1	止动垫片	25	键
6	MG1机械密封	17	挡水圈	26	轴承盖
7	泵盖	18	M3N机械密封	27	内六角圆柱头螺钉
8	轴承	19	螺柱	28	管堵
		19.1	螺母	28.1	管堵垫片

注：1，泵体为EA150/26、65/32、80/32、100/32、200/32、80/40、100/40、125/40、150/40的有3.1其余型号没有。
2，EAZS40/32、50/32、65/32、80/32高速时，泵体和泵盖需用QT400-18材料。

EAZS系列卧式直联式离心泵 性能参数表

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	%	mm	m
EAZS32/13-02202	9.0	2.50	26.0	2900	1.23	1.5	52	139	1.4
	15.0	4.17	24.0		1.61	2.2	61		1.7
	18.0	5.00	22.5		1.78	2.2	62		2.5
EAZS32/13-02202	8.4	2.34	22.0	2900	0.98	1.5	51.5	130	1.4
	14.0	3.90	19.7		1.25	1.5	60		1.7
	16.8	4.68	18.0		1.36	2.2	60.5		2.5
EAZS32/13-01502	7.8	2.16	18.0	2900	0.75	1.1	51	120	1.4
	13.0	3.60	16.2		0.98	1.1	58.5		1.7
	15.6	4.32	14.5		1.06	1.5	58		2.5
EAZS32/13-01102	7.1	1.98	14.8	2900	0.57	1.1	50	110	1.4
	11.9	3.30	13.0		0.74	1.1	57		1.7
	14.3	3.96	11.4		0.80	1.1	55.5		2.5
EAZS32/13-01102	6.5	1.80	11.7	2900	0.43	0.75	48	100	1.4
	10.8	3.00	10.1		0.57	0.75	52		1.7
	13.0	3.60	8.7		0.59	1.1	52		2.5
EAZS32/16-05502	10.8	3.00	42.0	2900	2.66	3	46.5	174	1.9
	18.0	5.00	39.0		3.41	4	56		2.2
	21.6	6.00	36.5		3.79	5.5	56.7		3.7
EAZS32/16-04002	10.2	2.84	37.0	2900	2.27	3	45.5	165	1.9
	17.1	4.74	34.6		2.90	3	55.5		2.2
	20.5	5.69	32.1		3.18	4	56.3		3.7
EAZS32/16-04002	9.6	2.67	32.3	2900	1.92	3	44	155	1.9
	16.0	4.45	30.5		2.44	3	54.5		2.2
	19.2	5.34	28.7		2.68	4	56		3.7
EAZS32/16-03002	9.0	2.50	28.3	2900	1.61	2.2	43	145	1.9
	15.0	4.17	26.5		2.04	3	53		2.2
	18.0	5.00	25.0		2.25	3	54.5		3.7
EAZS32/16-02202	8.4	2.33	24.6	2900	1.40	2.2	40	135	1.9
	14.0	3.88	22.7		1.69	2.2	51		2.2
	16.8	4.66	21.4		1.86	2.2	52.5		3.7
EAZS32/16-02202	7.8	2.16	20.5	2900	1.11	1.1	39	125	1.9
	12.9	3.59	19.2		1.39	2.2	48.5		2.2
	15.5	4.31	18.0		1.49	2.2	51		3.7
EAZS32/20-11002	10.8	3.00	64.2	2900	4.84	5.5	39	214	1.7
	18.0	5.00	58.5		5.92	7.5	48.4		2
	21.6	6.00	54.1		6.59	11	48.3		2.3
EAZS32/20-07502	10.3	2.87	58.3	2900	4.25	5.5	38.6	205	1.6
	17.2	4.79	53.0		5.16	7.5	48.2		1.95
	20.7	5.75	48.3		5.66	7.5	48.1		2.2
EAZS32/20-07502	9.8	2.73	52.2	2900	3.62	5.5	38.6	195	1.6
	16.4	4.56	47.7		4.48	7.5	47.5		1.95
	19.7	5.47	43.2		4.92	7.5	47		2.2
EAZS32/20-05502	9.3	2.59	47.2	2900	3.24	4	37	185	1.6
	15.6	4.32	42.5		3.87	5.5	46.5		1.95
	18.7	5.19	38.2		4.22	5.5	46		2.2
EAZS32/20-05502	8.8	2.45	42.2	2900	2.82	4	36	175	1.6
	14.7	4.09	38.0		3.39	5.5	45		1.95
	17.7	4.91	34.2		3.72	5.5	44.2		2.2
EAZS32/20-04002	8.3	2.31	37.5	2900	2.40	2.2	35.5	165	1.6
	13.9	3.86	33.8		2.97	4	43		1.95
	16.7	4.63	30.4		3.17	4	43.4		2.2
EAZS32/26-18502	16.2	4.50	89.3	2900	11.76	15	33.5	264	2.1
	27.0	7.50	82.0		14.52	18.5	41.5		2.6
	32.4	9.00	75.3		16.28	18.5	40.8		3.1
EAZS32/26-18502	15.6	4.35	83.6	2900	10.79	15	33	255	2.1
	26.1	7.24	76.0		13.39	15	40.3		2.6
	31.3	8.69	70.5		14.83	18.5	40.5		3.1

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	%	mm	m
EAZS32/26-15002	15.0	4.18	77.5	2900	10.23	15	31	245	2.1
	25.1	6.96	70.2		12.12	15	39.5		2.6
	30.1	8.35	65.0		13.23	15	40.2		3.1
EAZS32/26-15002	14.4	4.01	72.0	2900	9.12	15	31	235	2.1
	24.0	6.68	65.0		10.90	15	39		2.6
	28.8	8.01	59.8		11.74	15	40		3.1
EAZS32/26-15002	13.8	3.84	66.0	2900	8.13	11	30.5	225	2.1
	23.0	6.39	59.6		9.95	15	37.5		2.6
	27.6	7.67	54.8		10.84	15	38		3.1
EAZS32/26-11002	13.2	3.66	60.8	2900	7.28	11	30	215	2.1
	22.0	6.11	55.0		9.09	11	36.2		2.6
	26.4	7.33	51.0		9.90	11	37		3.1
EAZS32/26-11002	12.6	3.49	58.0	2900	6.97	11	28.5	205	2.1
	21.0	5.82	50.8		8.40	11	34.5		2.6
	25.2	6.99	46.2		9.04	11	35		3.1
EAZS40/13-04002	18.0	5.00	25.3	2900	2.03	2.2	61	139	1.8
	30.0	8.33	23.5		2.63	3	73		2
	36.0	10.00	21.8		2.91	4	73.5		3
EAZS40/13-03002	16.8	4.67	22.0	2900	1.63	2.2	62	130	1.8
	28.0	7.79	20.2		2.11	3	73.2		2
	33.7	9.35	18.5		2.32	3	73.2		3
EAZS40/13-02202	15.5	4.31	18.5	2900	1.28	1.5	61	120	1.8
	25.9	7.19	17.0		1.64	2.2	73		2
	31.1	8.63	15.3		1.77	2.2	73		3
EAZS40/13-02202	14.2	3.96	15.5	2900	1.00	1.5	60	110	1.8
	23.7	6.59	13.7		1.23	1.5	72		2
	28.5	7.91	12.2		1.31	2.2	72		3
EAZS40/13-01502	12.9	3.60	12.5	2900	0.76	1.1	58	100	1.8
	21.6	5.99	11.0		0.92	1.5	70		2
	25.9	7.19	9.5		0.97	1.5	69		3
EAZS40/16-07502	18.0	5.00	39.5	2900	3.39	5.5	57	174	1.5
	30.0	8.33	35.0		4.46	5.5	64		2.2
	36.0	10.00	31.5		5.02	7.5	61.5		3.3
EAZS40/16-05502	17.1	4.74	34.8	2900	2.89	4	56	165	1.5
	28.4	7.90	30.5		3.74	5.5	63.2		2.2
	34.1	9.48	27.6		4.20	5.5	61		3.3
EAZS40/16-04002	16.0	4.45	30.5	2900	2.42	4	55	155	1.5
	26.7	7.42	26.5		3.15	4	61.2		2.2
	32.1	8.90	23.4		3.46	4	59		3.3
EAZS40/16-04002	15.0	4.17	26.7	2900	2.06	3	53	145	1.5
	25.0	6.94	22.5		2.62	4	58.5		2.2
	30.0	8.33	19.5		2.84	4	56		3.3
EAZS40/16-03002	14.0	3.88	23.1	2900	1.76	3	50	135	1.5
	23.3	6.46	19.5		2.17	3	57		2.2
	27.9	7.76	16.5		2.28	3	55		3.3
EAZS40/16-03002	12.9	3.59	19.5	2900	1.43	3	48	125	1.5
	21.5	5.98	16.0		1.71	3	55		2.2
	25.9	7.18	13.5		1.86	3	51		3.3
EAZS40/20-11002	18.0	5.00	61.5	2900	6.28	7.5	48	214	1.8
	30.0	8.33	56.5		7.95	11	58		2
	36.0	10.00	53.0		8.88	11	58.5		2.7
EAZS40/20-11002	17.2	4.79	55.4	2900	5.42	7.5	48	205	1.8
	28.7	7.98	51.0		6.94	11	57.5		2
	34.5	9.58	47.3		7.65	11	58		2.7
EAZS40/20-11002	16.4	4.55	49.5	2900	4.70	5.5	47	195	1.8
	27.3	7.59	47.5		6.25	7.5	56.5		2
	32.8	9.11	42.0		6.58	11	57		2.7

EAZS系列卧式直联式离心泵 性能参数表

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	%	mm	m
EAZS40/20-07502	15.6	4.32	44.6	2900	4.10	7.5	46	185	1.8
	25.9	7.20	40.5		5.15	7.5	55.5		2
	31.1	8.64	36.5		5.62	7.5	55		2.7
EAZS40/20-07502	14.7	4.09	39.9	2900	3.55	5.5	45	175	1.8
	24.5	6.81	36.0		4.45	7.5	54		2
	29.4	8.17	32.2		4.82	7.5	53.5		2.7
EAZS40/20-05502	13.9	3.85	35.4	2900	3.01	5.5	44.5	165	1.8
	23.1	6.42	31.5		3.81	5.5	52		2
	27.7	7.71	28.2		4.14	5.5	51.5		2.7
EAZS40/26-22002	21.6	6.00	93.0	2900	13.67	15	40	264	1.8
	36.0	10.00	86.5		16.62	18.5	51		2
	43.2	12.00	81.5		18.08	22	53		2.5
EAZS40/26-18502	20.9	5.80	86.0	2900	12.21	15	40	255	1.8
	34.8	9.66	80.0		15.06	18.5	50.3		2
	41.7	11.59	74.5		16.18	18.5	52.3		2.5
EAZS40/26-18502	20.0	5.57	78.3	2900	10.96	15	39	245	1.8
	33.4	9.28	72.0		13.10	15	50		2.0
	40.1	11.14	66.0		14.12	18.5	51		2.5
EAZS40/26-15002	19.2	5.34	71.0	2900	9.78	15	38	235	1.8
	32.0	8.90	66.2		11.91	15	48.5		2
	38.5	10.68	60.7		12.71	15	50		2.5
EAZS40/26-15002	18.4	5.11	65.1	2900	8.58	11	38	225	1.8
	30.7	8.52	60.2		10.48	15	48		2
	36.8	10.23	55.7		11.50	15	48.5		2.5
EAZS40/26-15002	17.6	4.89	59.4	2900	7.59	11	37.5	215	1.8
	29.3	8.14	54.3		9.22	11	47		2
	35.2	9.77	50.8		10.25	15	47.5		2.5
EAZS40/26-11002	16.8	4.66	54.0	2900	6.57	11	37.5	205	1.8
	28.0	7.77	49.5		8.19	11	46		2
	33.5	9.32	45.5		8.94	11	46.5		2.5
EAZS40/32-45002	21.6	6.00	155.0	2900	27.21	30	33.5	329	2.7
	36.0	10.00	148.0		34.13	37	42.5		3.2
	43.2	12.00	140.0		37.42	45	44		4.8
EAZS40/32-37002	20.7	5.74	139.0	2900	24.45	30	32	315	2.7
	34.5	9.57	133.0		30.07	37	41.5		3.2
	41.4	11.49	126.0		32.84	37	43.2		4.8
EAZS40/32-37002	19.7	5.47	124.5	2900	21.53	30	31	300	2.7
	32.8	9.12	118.0		26.04	30	40.5		3.2
	39.4	10.94	114.0		29.11	37	42		4.8
EAZS40/32-30002	18.7	5.20	111.0	2900	18.85	22	30	285	2.7
	31.2	8.66	107.0		23.00	30	39.5		3.2
	37.4	10.40	100.0		25.47	30	40		4.8
EAZS40/32-30002	17.7	4.92	99.0	2900	17.06	22	28	270	2.7
	29.5	8.21	95.0		19.59	30	39		3.2
	35.5	9.85	88.0		21.78	30	39		4.8
EAZS40/32-22002	16.7	4.65	88.0	2900	14.58	18.5	27.5	255	2.7
	27.9	7.75	81.5		16.96	22	36.5		3.2
	33.5	9.30	75.0		17.99	22	38		4.8
EAZS50/13-07502	36.0	10.00	26.0	2900	3.89	5.5	65.5	139	1.95
	60.0	16.67	23.0		4.82	7.5	78		2.5
	72.0	20.00	20.5		5.36	7.5	75		3.3
EAZS50/13-05502	33.7	9.35	22.0	2900	3.13	4	64.5	130	1.95
	56.1	15.59	18.6		3.79	5.5	75		2.5
	67.4	18.71	16.1		4.10	5.5	72		3.3
EAZS50/13-04002	31.1	8.63	18.3	2900	2.46	4	63	120	1.95
	51.8	14.39	15.0		2.94	4	72		2.5
	62.2	17.27	12.3		3.06	4	68		3.3

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	%	mm	m
EAZS50/13-03002	28.5	7.92	15.0	2900	1.88	3	62	110	1.95
	47.5	13.19	11.6		2.17	3	69		2.5
	57.0	15.83	9.6		2.31	3	64.5		3.3
EAZS50/16-11002	39.0	10.83	42.3	2900	6.96	11	64.5	174	1.8
	65.0	18.05	38.0		8.96	11	75		2.8
	78.0	21.66	33.8		10.11	11	71		3.2
AZS50/16-11002	37.0	10.27	37.5	2900	5.99	7.5	63	165	1.8
	61.6	17.12	33.2		7.68	11	72.5		2.8
	73.9	20.54	29.5		8.73	11	68		3.2
EAZS50/16-11002	34.7	9.65	33.3	2900	5.25	7.5	60	155	1.8
	57.9	16.08	29.2		6.67	11	69		2.8
	69.5	19.29	25.8		7.28	11	67		3.2
EAZS50/16-07502	32.5	9.03	28.7	2900	4.30	5.5	59	145	1.8
	54.2	15.04	25.0		5.46	7.5	67.5		2.8
	65.0	18.05	22.1		6.01	7.5	65		3.2
EAZS50/16-07502	30.2	8.40	24.5	2900	3.48	5.5	58	135	1.8
	50.4	14.00	20.8		4.46	5.5	64		2.8
	60.5	16.81	18.3		4.86	7.5	62		3.2
EAZS50/16-05502	28.0	7.78	20.5	2900	2.95	4	53	125	1.8
	46.7	12.97	16.8		3.44	5.5	62		2.8
	56.0	15.56	14.2		3.64	5.5	59.5		3.2
EAZS50/20-18502	36.0	10.00	62.0	2900	10.48	15	58	214	2.2
	60.0	16.67	56.0		13.07	15	70		3.2
	72.0	20.00	51.0		14.70	18.5	68		4
EAZS50/20-15002	34.5	9.58	56.3	2900	8.81	11	60	205	2.2
	57.5	15.97	50.3		11.53	15	68.3		3.2
	69.0	19.16	44.7		12.82	15	65.5		4
EAZS50/20-15002	32.8	9.11	51.3	2900	7.77	11	59	195	2.2
	54.7	15.19	44.7		10.01	15	66.5		3.2
	65.6	18.23	40.0		11.16	15	64		4
EAZS50/20-11002	31.1	8.65	46.2	2900	6.75	11	58	185	2.2
	51.9	14.41	40.2		8.67	11	65.5		3.2
	62.3	17.29	35.4		9.68	11	62		4
EAZS50/20-11002	29.4	8.18	41.3	2900	5.86	7.5	56.5	175	2.2
	49.1	13.63	36.2		7.56	7.5	64		3.2
	58.9	16.36	31.4		8.60	11	58.5		4
EAZS50/20-07502	27.8	7.71	36.7	2900	5.14	7.5	54	165	2.2
	46.3	12.85	32.2		6.76	7.5	60		3.2
	55.5	15.42	27.5		7.42	7.5	56		4
EAZS50/26-37002	39.0	10.83	97.5	2900	20.29	30	51	264	1.7
	65.0	18.05	91.5		26.32	30	61.5		2.5
	78.0	21.66	87.0		29.31	37	63		3.2
EAZS50/26-30002	37.7	10.46	90.5	2900	18.19	22	51	255	1.7
	62.8	17.43	84.0		23.53	30	61		2.5
	75.3	20.92	79.5		26.29	30	62		3.2
EAZS50/26-30002	36.2	10.05	84.0	2900	16.55	18.5	50	245	1.7
	60.3	16.75	78.0		21.34	30	60		2.5
	72.4	20.10	73.0		23.57	30	61		3.2
EAZS50/26-30002	34.7	9.64	77.5	2900	14.79	18.5	49.5	235	1.7
	57.8	16.07	71.0		18.95	22	59		2.5
	69.4	19.28	66.0		20.78	30	60		3.2
EAZS50/26-22002	33.2	9.23	71.0	2900	13.10	15	49	225	1.7
	55.4	15.38	65.0		17.05	22	57.5		2.5
	66.5	18.46	60.5		18.54	22	59		3.2
EAZS50/26-18502	31.8	8.82	65.0	2900	11.70	15	48	215	1.7
	52.9	14.70	59.4		15.14	18.5	56.5		2.5
	63.5	17.64	55.2		16.60	18.5	57.5		3.2

EAZS系列卧式直联式离心泵 性能参数表

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	%	mm	m
EAZS50/26-18502	30.3	8.41	59.0	2900	10.35	15	47	205	1.7
	50.5	14.02	53.5		13.36	18.5	55		2.5
	60.5	16.82	49.8		14.66	18.5	56		3.2
EAZS50/32-75002	54.0	15.00	151.5	2900	41.63	45	53.5	329	2.8
	90.0	25.00	136.0		54.62	55	61		4.5
	108.0	30.00	124.0		62.86	75	58		7
EAZS50/32-75002	51.7	14.36	139.0	2900	37.26	45	52.5	315	2.8
	86.2	23.94	125.0		48.71	55	60.2		4.5
	103.4	28.72	113.5		54.61	75	58.5		7
EAZS50/32-55002	49.2	13.68	126.0	2900	32.79	37	51.5	300	2.8
	82.1	22.80	113.0		42.79	45	59		4.5
	98.5	27.36	102.5		47.79	55	57.5		7
EAZS50/32-45002	46.8	12.99	114.0	2900	28.75	30	50.5	285	2.8
	78.0	21.66	101.0		36.96	37	58		4.5
	93.6	25.99	92.0		41.47	45	56.5		7
EAZS50/32-45002	44.3	12.31	101.5	2900	24.99	30	49	270	2.8
	73.9	20.52	90.5		32.21	37	56.5		4.5
	88.6	24.62	82.0		35.33	45	56		7
EAZS50/32-37002	41.9	11.63	90.5	2900	21.26	22	48.5	255	2.8
	69.8	19.38	80.0		27.62	30	55		4.5
	83.7	23.25	72.5		30.31	37	54.5		7
EAZS65/13-11002	60.0	16.67	24.5	2900	5.89	7.5	68	139	3
	100.0	27.78	20.5		7.06	11	79		3.75
	120.0	33.34	17.2		7.39	11	76		4.2
EAZS65/13-07502	56.1	15.59	20.6	2900	4.63	7.5	68	130	3
	93.5	25.98	16.2		5.38	7.5	76.6		3.75
	112.2	31.18	13.0		5.59	7.5	71		4.2
EAZS65/13-05502	51.8	14.39	17.2	2900	3.68	5.5	66	120	3
	86.3	23.98	13.2		4.25	5.5	73		3.75
	103.6	28.78	10.2		4.29	5.5	67		4.2
EAZS65/16-15002	60.0	16.67	39.7	2900	9.83	15	66	174	2.7
	100.0	27.78	34.0		12.34	15	75		3.5
	120.0	33.34	29.6		13.16	15	73.5		4.1
EAZS65/16-15002	56.9	15.81	36.0	2900	8.32	11	67	165	2.7
	94.8	26.34	30.0		10.47	15	74		3.5
	113.8	31.61	25.8		11.02	15	72.5		4.1
EAZS65/16-11002	53.5	14.85	32.0	2900	7.16	11	65	155	2.7
	89.1	24.75	26.2		8.75	11	72.6		3.5
	106.9	29.70	21.8		9.06	11	70		4.1
EAZS65/16-11002	50.0	13.89	28.0	2900	6.05	7.5	63	145	2.7
	83.3	23.15	22.2		7.09	11	71		3.5
	100.0	27.78	18.2		7.23	11	68.5		4.1
EAZS65/16-07502	46.6	12.93	24.2	2900	5.03	7.5	61	135	2.7
	77.6	21.55	19.2		5.89	7.5	69		3.5
	93.1	25.86	15.5		6.04	7.5	65		4.1
EAZS65/16-05502	43.1	11.97	20.7	2900	4.06	5.5	60	125	2.7
	71.8	19.96	16.0		4.67	5.5	67		3.5
	86.2	23.95	12.8		4.77	5.5	63		4.1
EAZS65/20-30002	66.0	18.33	64.2	2900	19.55	22	59	214	2.4
	110.0	30.55	56.5		23.08	30	73.3		3.7
	132.0	36.66	52.0		25.52	30	73.2		5.2
EAZS65/20-30002	63.2	17.56	58.2	2900	16.15	18.5	62	205	2.4
	105.4	29.27	50.5		19.84	30	73		3.7
	126.4	35.12	45.6		21.65	30	72.5		5.2
EAZS65/20-22002	60.1	16.70	52.9	2900	14.43	18.5	60	195	2.4
	100.2	27.84	46.0		17.31	22	72.5		3.7
	120.3	33.41	41.4		18.82	22	72		5.2

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	%	mm	m
EAZS65/20-22002	57.0	15.85	47.6	2900	12.32	15	60	185	2.4
	95.1	26.41	41.4		14.88	22	72		3.7
	114.1	31.69	37.3		16.19	22	71.5		5.2
EAZS65/20-18502	54.0	14.99	42.0	2900	10.46	15	59	175	2.4
	89.9	24.98	36.6		12.62	18.5	71		3.7
	107.9	29.98	32.7		13.63	18.5	70.5		5.2
EAZS65/20-15002	50.9	14.13	36.8	2900	8.94	11	57	165	2.4
	84.8	23.55	32.0		10.55	15	70		3.7
	101.8	28.27	28.0		11.41	15	68		5.2
EAZS65/26-55002	72.0	20.00	98.0	2900	30.49	37	63	264	2.4
	120.0	33.33	89.9		39.95	45	73.5		4.2
	144.0	40.00	82.3		45.12	55	71.5		5.8
EAZS65/26-45002	69.5	19.32	91.0	2900	27.78	37	62	255	2.4
	115.9	32.19	83.0		35.87	45	73		4.2
	139.1	38.63	76.0		40.53	45	71		5.8
EAZS65/26-45002	66.8	18.56	84.5	2900	25.19	30	61	245	2.4
	111.4	30.93	77.0		32.19	37	72.5		4.2
	133.6	37.12	70.0		35.86	45	71		5.8
EAZS65/26-37002	64.1	17.80	78.5	2900	23.21	30	59	235	2.4
	106.8	29.67	71.0		28.87	37	71.5		4.2
	128.2	35.60	64.0		31.67	37	70.5		5.8
EAZS65/26-37002	61.4	17.04	72.5	2900	20.88	30	58	225	2.4
	102.3	28.41	65.0		25.63	30	70.6		4.2
	122.7	34.09	59.0		28.16	37	70		5.8
EAZS65/26-30002	58.6	16.29	66.2	2900	18.38	22	57.5	215	2.4
	97.7	27.14	59.4		23.05	30	68.5		4.2
	117.3	32.57	50.8		24.95	30	65		5.8
EAZS65/26-30002	55.9	15.53	59.0	2900	16.32	22	55	205	2.4
	93.2	25.88	52.6		20.37	30	65.5		4.2
	111.8	31.06	48.0		22.48	30	65		5.8
EAZS65/32-90002	78.0	21.66	143.5	2900	56.41	75	54	329	3.1
	130.0	36.10	133.5		74.14	90	63.7		4.8
	156.0	43.32	124.0		82.25	90	64		6.8
EAZS65/32-90002	74.7	20.74	131.0	2900	49.76	55	53.5	315	3.1
	124.4	34.56	119.0		63.68	75	63.3		4.8
	149.3	41.48	110.0		70.63	90	63.3		6.8
EAZS65/32-75002	71.1	19.75	117.0	2900	43.97	55	51.5	300	3.1
	118.5	32.92	105.0		54.20	75	62.5		4.8
	142.2	39.50	95.3		59.50	75	62		6.8
EAZS65/32-75002	67.5	18.76	104.0	2900	37.50	45	51	285	3.1
	112.6	31.27	92.0		46.22	55	61		4.8
	135.1	37.53	82.6		50.63	75	60		6.8
EAZS65/32-55002	64.0	17.78	94.2	2900	32.82	45	50	270	3.1
	106.7	29.63	82.0		39.68	55	60		4.8
	128.0	35.55	71.7		43.44	55	57.5		6.8
EAZS65/32-45002	60.4	16.79	83.0	2900	27.87	37	49	255	3.1
	100.7	27.98	72.3		35.72	37	55.5		4.8
	120.9	33.58	62.2		37.55	45	54.5		6.8
EAZS80/16-30002	97.2	27.00	40.3	2900	15.23	18.5	70	174	2.7
	162.0	45.00	34.7		19.13	22	80		3.8
	194.4	54.00	29.3		20.95	30	74		5
EAZS80/16-22002	92.2	25.60	34.8	2900	12.94	18.5	67.5	165	2.7
	153.6	42.67	29.1		16.01	18.5	76		3.8
	184.3	51.21	24.2		17.60	22	69		5
EAZS80/16-18502	86.6	24.05	30.7	2900	11.49	15	63	155	2.7
	144.3	40.09	24.7		13.11	15	74		3.8
	173.2	48.10	20.1		14.36	18.5	66		5

EAZS系列卧式直联式离心泵 性能参数表

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	%	mm	m
EAZS80/16-15002	81.0	22.50	26.9	2900	9.55	11	62	145	2.7
	135.0	37.50	21.6		11.03	15	72		3.8
	162.0	45.00	17.4		11.99	15	64		5
EAZS80/16-11002	75.4	20.95	22.8	2900	8.07	11	58	135	2.7
	125.7	34.91	18.2		9.44	11	66		3.8
	150.8	41.90	14.4		9.85	11	60		5
EAZS80/20-45002	114.0	31.67	60.5	2900	28.02	37	67	214	3.1
	190.0	52.78	52.7		35.04	45	77.8		4.8
	228.0	63.34	46.0		38.85	45	73.5		5.8
EAZS80/20-37002	109.2	30.34	55.1	2900	25.20	30	65	205	4
	182.0	50.56	47.9		30.78	37	77.1		4.9
	218.4	60.67	41.5		34.04	37	72.5		5.85
EAZS80/20-37002	103.9	28.86	49.6	2900	22.62	30	62	195	4
	173.1	48.09	43.6		27.04	30	76		4.7
	207.8	57.71	37.6		29.54	37	72		5.5
EAZS80/20-30002	98.6	27.38	43.8	2900	18.95	30	62	185	4
	164.3	45.63	37.2		22.48	30	74		4.7
	197.1	54.75	31.8		24.73	30	69		5.5
EAZS80/20-30002	93.2	25.90	39.2	2900	15.07	18.5	66	175	4
	155.4	43.16	33.3		18.53	22	76		4.7
	186.5	51.79	28.5		19.26	30	75		5.5
EAZS80/20-22002	87.9	24.42	34.8	2900	12.73	15	65.5	165	4
	146.5	40.69	29.6		15.63	18.5	75.5		4.7
	175.8	48.83	25.3		16.25	22	74.5		5.5
EAZS80/26-75002	114.0	31.67	95.0	2900	45.01	55	65.5	264	2.6
	190.0	52.78	83.5		57.59	75	75		4.2
	228.0	63.34	74.0		63.79	75	72		5.8
EAZS80/26-75002	110.1	30.59	87.5	2900	40.35	55	65	255	3.95
	183.5	50.98	76.5		51.30	75	74.5		5.2
	220.2	61.18	69.0		56.51	75	73.2		6.25
EAZS80/26-55002	105.8	29.39	80.1	2900	36.05	45	64	245	3.9
	176.3	48.98	70.0		45.41	55	74		5
	211.6	58.78	62.0		50.09	55	71.3		6
EAZS80/26-55002	101.5	28.19	73.3	2900	32.14	45	63	235	3.9
	169.1	46.98	63.0		39.68	55	73.1		5
	203.0	56.38	55.1		42.88	55	71		6
EAZS80/26-45002	97.2	26.99	66.5	2900	28.37	37	62	225	3.9
	161.9	44.98	57.0		34.75	45	72.3		5
	194.3	53.98	49.6		37.22	45	70.5		6
EAZS80/26-37002	92.8	25.79	60.1	2900	24.90	30	61	215	3.9
	154.7	42.98	50.3		30.05	37	70.5		5
	185.7	51.58	44.5		32.13	37	70		6
EAZS80/26-37002	88.5	24.59	54.0	2900	21.87	30	59.5	205	3.9
	147.5	40.98	45.1		25.88	37	70		5
	177.1	49.18	39.8		27.60	37	69.5		6
EAZS80/32-90002	109.1	30.30	106.0	2900	52.46	75	60	285	3
	181.8	50.50	96.5		65.34	75	73.1		6.8
	218.2	60.60	88.0		73.61	90	71		9
EAZS80/32-75002	103.3	28.71	95.5	2900	45.08	55	59.6	270	3
	172.2	47.84	87.0		55.88	75	73		6.8
	206.7	57.41	79.2		63.21	75	70.5		9
EAZS80/32-75002	97.6	27.11	85.5	2900	38.50	45	59	255	3
	162.7	45.19	78.0		48.31	55	71.5		6.8
	195.2	54.22	70.0		53.14	75	70		9
EAZS100/16-30002	151.2	42.00	34.5	2900	21.04	30	67.5	176	4
	252.0	70.00	26.7		23.94	30	76.5		4.6
	302.4	84.00	20.8		24.12	30	71		6.1

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	%	mm	m
EAZS100/16-22002	141.8	39.38	30.0	2900	17.41	22	66.5	165	4.9
	236.3	65.63	23.0		19.72	22	75		4.9
	283.5	78.75	17.7		20.09	22	68		5.4
EAZS100/16-18502	133.2	36.99	25.8	2900	14.39	18.5	65	155	4.8
	221.9	61.65	19.2		16.11	18.5	72		4.8
	266.3	73.98	14.6		16.16	18.5	65.5		5.3
EAZS100/16-15002	124.6	34.60	22.8	2900	12.08	15	64	145	4.7
	207.6	57.67	16.2		13.08	15	70		4.7
	249.1	69.20	12.0		13.13	15	62		5.2
EAZS100/20-75002	171.0	47.50	58.7	2900	39.04	45	70	214	3.9
	285.0	79.17	50.1		48.59	55	80		5.8
	342.0	95.00	42.0		52.49	75	74.5		6.9
EAZS100/20-55002	163.8	45.50	53.2	2900	34.38	45	69	205	3.9
	273.0	75.84	44.3		41.68	55	79		5.8
	327.6	91.01	37.0		44.90	55	73.5		6.9
EAZS100/20-45002	155.8	43.28	47.0	2900	29.32	37	68	195	3.9
	259.7	72.14	38.7		35.53	45	77		5.8
	311.6	86.57	31.5		37.91	45	70.5		6.9
EAZS100/20-37002	147.8	41.06	42.0	2900	25.61	30	66	185	3.9
	246.4	68.44	33.0		30.11	37	73.5		5.8
	295.7	82.13	26.3		31.36	37	67.5		6.9
EAZS100/20-30002	139.8	38.85	37.2	2900	22.48	30	63	175	3.9
	233.1	64.74	28.7		26.01	30	70		5.8
	279.7	77.69	21.8		25.93	30	64		6.9
EAZS100/20-30002	131.9	36.63	32.0	2900	19.30	30	59.5	165	3.9
	219.8	61.04	24.0		21.27	30	67.5		5.8
	263.7	73.25	18.0		21.54	30	60		6.9
EAZS100/26-90002	164.3	45.63	81.5	2900	56.94	75	64	245	3.9
	273.8	76.04	71.5		70.48	90	75.6		5.8
	328.5	91.25	63.0		76.13	90	74		7
EAZS100/26-75002	157.5	43.76	75.0	2900	51.04	75	63	235	3.9
	262.6	72.94	65.2		62.56	75	74.5		5.8
	315.1	87.53	56.8		67.20	75	72.5		7
EAZS100/26-75002	150.8	41.90	68.7	2900	45.52	55	62	225	3.9
	251.4	69.84	58.5		55.22	75	72.5		5.8
	301.7	83.80	50.5		59.25	75	70		7
EAZS100/26-75002	144.1	40.04	62.3	2900	39.75	55	61.5	215	3.9
	240.2	66.73	52.4		48.61	75	70.5		5.8
	288.3	80.08	44.5		51.36	75	68		7
EAZS100/26-55002	137.4	38.18	56.0	2900	36.12	45	58	205	3.9
	229.1	63.63	46.4		41.93	55	69		5.8
	274.9	76.35	38.0		45.13	55	63		7
EAZS125/20-90002	216.0	60.00	56.5	2900	55.84	75	59.5	214	4.7
	360.0	100.00	49.0		64.89	90	74		6.5
	432.0	120.00	42.5		68.94	90	72.5		7.2
EAZS125/20-75002	206.9	57.48	51.7	2900	50.21	55	58	205	4.7
	344.9	95.79	43.6		56.46	75	72.5		6.5
	413.8	114.95	37.0		58.46	75	71.3		7.2
EAZS125/20-55002	196.8	54.67	46.3	2900	43.52	55	57	195	4.7
	328.0	91.12	37.8		47.21	55	71.5		6.5
	393.6	109.35	31.5		48.92	55	69		7.2
EAZS125/20-45002	186.7	51.87	40.6	2900	38.22	45	54	185	4.7
	311.2	86.45	32.3		39.09	45	70		6.5
	373.5	103.74	26.2		40.36	45	66		7.2
EAZS32/13-00554	4.3	1.21	6.7	1450	0.17	0.55	47	139	1.7
	7.2	2.01	6.2		0.21	0.55	58		2
	8.7	2.41	5.8		0.23	0.55	59		2.1

EAZS系列卧式直联式离心泵 性能参数表

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	%	mm	m
EAZS32/13-00554	4.1	1.13	5.7	1450	0.14	0.55	46	130	1.7
	6.8	1.88	5.2		0.17	0.55	56.5		2
	8.1	2.26	4.8		0.18	0.55	58		2.1
EAZS32/13-00554	3.7	1.04	4.7	1450	0.11	0.55	45	120	1.7
	6.2	1.74	4.2		0.13	0.55	55		2
	7.5	2.08	3.9		0.14	0.55	56		2.1
EAZS32/13-00554	3.4	0.95	3.9	1450	0.08	0.55	45	110	1.7
	5.7	1.59	3.5		0.10	0.55	54		2
	6.9	1.91	3.1		0.11	0.55	54		2.1
EAZS32/13-00554	3.1	0.87	3.1	1450	0.06	0.55	44	100	1.7
	5.2	1.45	2.7		0.08	0.55	51		2
	6.2	1.74	2.3		0.08	0.55	52		2.1
EAZS32/16-00754	5.2	1.45	10.6	1450	0.32	0.55	47.5	174	1.8
	8.7	2.41	10.1		0.43	0.55	55		2
	10.4	2.89	9.5		0.48	0.75	56		2.2
EAZS32/16-00554	4.9	1.37	9.5	1450	0.28	0.55	45	165	1.8
	8.2	2.29	9.0		0.37	0.55	55		2
	9.9	2.74	8.5		0.41	0.55	55.5		2.2
EAZS32/16-00554	4.6	1.29	8.4	1450	0.24	0.55	44	155	1.8
	7.7	2.15	7.8		0.31	0.55	53.5		2
	9.3	2.58	7.3		0.34	0.55	54		2.2
EAZS32/16-00554	4.3	1.21	7.4	1450	0.21	0.55	42	145	1.8
	7.2	2.01	6.8		0.26	0.55	51.5		2
	8.7	2.41	6.4		0.29	0.55	52		2.2
EAZS32/16-00554	4.0	1.12	6.4	1450	0.17	0.55	41.5	135	1.8
	6.7	1.87	5.9		0.22	0.55	49.5		2
	8.1	2.24	5.5		0.24	0.55	50		2.2
EAZS32/16-00554	3.7	1.04	5.5	1450	0.14	0.55	40	125	1.8
	6.2	1.73	5.1		0.18	0.55	47		2
	7.5	2.08	4.7		0.20	0.55	49		2.2
EAZS32/20-01104	5.2	1.45	16.0	1450	0.61	0.75	37	214	1.9
	8.7	2.41	14.7		0.75	1.1	46.5		2
	10.4	2.89	13.6		0.81	1.1	47.5		2.3
EAZS32/20-01104	5.0	1.39	14.6	1450	0.55	0.75	36	205	1.9
	8.3	2.31	13.2		0.65	1.1	46		2
	10.0	2.77	12.1		0.71	1.1	46.5		2.3
EAZS32/20-00754	4.7	1.32	13.2	1450	0.49	0.75	34.5	195	1.9
	7.9	2.20	11.9		0.57	0.75	45		2
	9.5	2.64	10.9		0.63	0.75	45		2.3
EAZS32/20-00754	4.5	1.25	11.9	1450	0.43	0.75	34	185	1.9
	7.5	2.08	10.8		0.55	0.75	40		2
	9.0	2.50	9.9		0.54	0.75	44.5		2.3
EAZS32/20-00554	4.3	1.18	10.6	1450	0.37	0.55	33.5	175	1.9
	7.1	1.97	9.6		0.44	0.55	42		2
	8.5	2.36	8.8		0.49	0.55	42		2.3
EAZS32/20-00554	4.0	1.11	9.5	1450	0.31	0.55	33	165	1.9
	6.7	1.86	8.6		0.39	0.55	40		2
	8.0	2.23	7.8		0.43	0.55	40		2.3
EAZS32/26-03004	6.6	1.83	23.7	1450	1.42	2.2	30	264	1.8
	11.0	3.05	22.4		1.76	2.2	38		2.1
	13.2	3.66	21.4		1.92	3	40		2.4
EAZS32/26-02204	6.4	1.77	21.8	1450	1.26	2.2	30	255	1.8
	10.6	2.95	20.9		1.63	2.2	37		2.1
	12.7	3.54	19.9		1.75	2.2	39.5		2.4
EAZS32/26-02204	6.1	1.70	20.2	1450	1.16	2.2	29	245	1.8
	10.2	2.83	19.3		1.45	2.2	37		2.1
	12.2	3.40	18.5		1.58	2.2	39		2.4

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	%	mm	m
EAZS32/26-02204	5.9	1.63	18.6	1450	1.04	2.2	28.5	235	1.8
	9.8	2.71	17.8		1.32	2.2	36		2.1
	11.7	3.26	17.0		1.43	2.2	38		2.4
EAZS32/26-02204	5.6	1.56	17.1	1450	0.93	1.5	28	225	1.8
	9.4	2.60	16.3		1.19	1.5	35		2.1
	11.2	3.12	15.7		1.30	2.2	37		2.4
EAZS32/26-02204	5.4	1.49	15.9	1450	0.84	1.5	27.5	215	1.8
	8.9	2.48	15.1		1.08	1.5	34		2.1
	10.7	2.98	14.5		1.18	2.2	36		2.4
EAZS32/26-02204	5.1	1.42	14.8	1450	0.78	1.5	26.5	205	1.8
	8.5	2.37	14.0		0.98	1.5	33		2.1
	10.2	2.84	13.3		1.06	2.2	35		2.4
EAZS40/13-00554	8.7	2.42	6.4	1450	0.26	0.55	59	139	1.8
	14.5	4.03	6.0		0.33	0.55	71		2
	17.4	4.84	5.6		0.37	0.55	72		2.4
EAZS40/13-00554	8.1	2.26	5.6	1450	0.21	0.55	58	130	1.8
	13.6	3.77	5.2		0.27	0.55	71		2
	16.3	4.52	4.8		0.30	0.55	71		2.4
EAZS40/13-00554	7.5	2.09	4.8	1450	0.17	0.55	56	120	1.8
	12.5	3.48	4.3		0.21	0.55	69		2
	15.0	4.17	3.9		0.23	0.55	68.5		2.4
EAZS40/13-00554	6.9	1.91	4.0	1450	0.15	0.55	51	110	1.8
	11.5	3.19	3.6		0.18	0.55	64		2
	13.8	3.83	3.3		0.19	0.55	63.5		2.4
EAZS40/13-00554	6.3	1.74	3.3	1450	0.11	0.55	50.5	100	1.8
	10.4	2.90	3.0		0.15	0.55	58		2
	12.5	3.48	2.6		0.15	0.55	58		2.4
EAZS40/16-01104	8.7	2.42	10.0	1450	0.40	0.55	59	174	1.8
	14.5	4.03	9.0		0.56	0.75	63		2
	17.4	4.84	8.1		0.62	1.1	61.5		2.4
EAZS40/16-00754	8.3	2.29	8.9	1450	0.35	0.55	57	165	1.8
	13.8	3.82	8.0		0.48	0.75	62		2
	16.5	4.59	7.2		0.54	0.75	60		2.4
EAZS40/16-00754	7.8	2.15	7.8	1450	0.29	0.55	56	155	1.8
	12.9	3.59	7.0		0.41	0.55	60		2
	15.5	4.31	6.3		0.46	0.75	58		2.4
EAZS40/16-00554	7.3	2.02	7.0	1450	0.28	0.55	50	145	1.8
	12.1	3.36	6.0		0.35	0.55	57		2
	14.5	4.03	5.4		0.39	0.55	55		2.4
EAZS40/16-00554	6.8	1.88	6.0	1450	0.23	0.55	48.5	135	1.8
	11.3	3.13	5.2		0.30	0.55	53		2
	13.5	3.75	4.4		0.32	0.55	50		2.4
EAZS40/16-00554	6.3	1.74	5.1	1450	0.20	0.55	43	125	1.8
	10.4	2.90	4.3		0.25	0.55	49		2
	12.5	3.47	3.6		0.27	0.55	45		2.4
EAZS40/20-01504	8.7	2.42	15.5	1450	0.77	1.1	48	214	1.8
	14.5	4.03	14.3		0.99	1.5	57		2.2
	17.4	4.84	13.2		1.09	1.5	57.5		2.5
EAZS40/20-01504	8.3	2.32	14.0	1450	0.66	1.1	48	205	1.8
	13.9	3.86	13.0		0.88	1.1	56		2.2
	16.7	4.63	12.0		0.96	1.5	57		2.5
EAZS40/20-01104	7.9	2.20	12.7	1450	0.60	1.1	46	195	1.8
	13.2	3.67	11.6		0.76	1.1	55		2.2
	15.9	4.41	10.8		0.84	1.1	55.5		2.5
EAZS40/20-01104	7.5	2.09	11.2	1450	0.50	0.75	45.5	185	1.8
	12.5	3.48	10.4		0.66	1.1	54		2.2
	15.1	4.18	9.6		0.72	1.1	54.5		2.5

EAZS系列卧式直联式离心泵 性能参数表

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)			效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	%		mm	m
EAZS40/20-00754	7.1	1.98	10.0	1450	0.44	0.75	44		175	1.8
	11.9	3.30	9.2		0.56	0.75	53			2.2
	14.2	3.95	8.4		0.61	0.75	53.5			2.5
EAZS40/20-00754	6.7	1.86	9.0	1450	0.38	0.55	43.5		165	1.8
	11.2	3.11	8.0		0.48	0.75	50.5			2.2
	13.4	3.73	7.3		0.52	0.75	51			2.5
EAZS40/26-03004	9.6	2.66	24.0	1450	1.65	2.2	38		264	1.8
	16.0	4.44	22.7		2.02	2.2	49			1.9
	19.2	5.33	21.7		2.22	3	51			2.2
EAZS40/26-03004	9.3	2.57	22.0	1450	1.50	2.2	37		255	1.8
	15.4	4.29	20.7		1.83	3	47.5			1.9
	18.5	5.15	19.6		1.98	3	50			2.2
EAZS40/26-02204	8.9	2.47	20.3	1450	1.37	2.2	36		245	1.8
	14.8	4.12	18.9		1.64	2.2	46.5			1.9
	17.8	4.94	18.0		1.76	2.2	49.5			2.2
EAZS40/26-02204	8.5	2.37	18.4	1450	1.26	2.2	34		235	1.8
	14.2	3.95	17.3		1.47	2.2	45.5			1.9
	17.1	4.74	16.4		1.57	2.2	48.5			2.2
EAZS40/26-02204	8.2	2.27	16.8	1450	1.13	1.5	33		225	1.8
	13.6	3.78	15.7		1.29	2.2	45			1.9
	16.3	4.54	15.0		1.42	2.2	47			2.2
EAZS40/26-02204	7.8	2.17	15.2	1450	1.01	1.5	32		215	1.8
	13.0	3.62	14.2		1.14	1.5	44			1.9
	15.6	4.34	13.5		1.23	2.2	46.5			2.2
EAZS40/26-02204	7.4	2.07	13.7	1450	0.93	1.5	30		205	1.8
	12.4	3.45	12.9		1.04	1.5	42			1.9
	14.9	4.14	12.2		1.10	2.2	45			2.2
EAZS40/32-05504	10.8	3.00	37.5	1450	3.56	5.5	31		329	2.1
	18.0	5.00	35.6		4.36	5.5	40			2.3
	21.6	6.00	33.8		4.73	5.5	42			2.5
EAZS40/32-05504	10.3	2.87	33.9	1450	3.13	4	30.5		315	2.1
	17.2	4.79	32.0		3.75	5.5	40			2.3
	20.7	5.74	30.5		4.09	5.5	42			2.5
EAZS40/32-05504	9.8	2.74	30.6	1450	2.73	4	30		300	2.1
	16.4	4.56	29.0		3.32	4	39			2.3
	19.7	5.47	27.6		3.61	5.5	41			2.5
EAZS40/32-04004	9.4	2.60	27.8	1450	2.36	3	30		285	2.1
	15.6	4.33	26.0		2.94	4	37.5			2.3
	18.7	5.20	24.4		3.11	4	40			2.5
EAZS40/32-04004	8.9	2.46	24.3	1450	1.99	3	29.5		270	2.1
	14.8	4.10	23.2		2.52	4	37			2.3
	17.7	4.92	21.5		2.66	4	39			2.5
EAZS40/32-03004	8.4	2.33	22.0	1450	1.93	3	26		255	2.1
	14.0	3.88	20.3		2.20	3	35			2.3
	16.7	4.65	19.6		2.41	3	37			2.5
EAZS50/13-01104	17.4	4.82	6.8	1450	0.54	0.75	59		139	2.2
	28.9	8.04	6.3		0.69	1.1	72			2.4
	34.7	9.65	5.8		0.75	1.1	73			2.7
EAZS50/13-00754	16.2	4.51	5.8	1450	0.44	0.75	58.5		130	2.2
	27.1	7.52	5.2		0.53	0.75	72			2.4
	32.5	9.02	4.7		0.58	0.75	72			2.7
EAZS50/13-00554	15.0	4.16	4.9	1450	0.33	0.55	62		120	2.2
	25.0	6.94	4.4		0.42	0.55	71			2.4
	30.0	8.33	3.8		0.45	0.55	69			2.7
EAZS50/13-00554	13.7	3.82	4.1	1450	0.25	0.55	61		110	2.2
	22.9	6.36	3.4		0.32	0.55	67			2.4
	27.5	7.64	2.8		0.33	0.55	64			2.7

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	%	mm	m
EAZS50/16-01504	18.5	5.15	10.5	1450	0.81	1.1	65	174	2.1
	30.9	8.58	9.5		1.08	1.5	74		2.2
	37.1	10.30	8.8		1.27	1.5	70		2.4
EAZS50/16-01504	17.6	4.88	9.4	1450	0.71	1.1	64	165	2.1
	29.3	8.14	8.5		0.93	1.5	73		2.2
	35.1	9.76	7.8		1.02	1.5	73		2.4
EAZS50/16-01104	16.5	4.59	8.3	1450	0.61	1.1	61	155	2.1
	27.5	7.64	7.5		0.78	1.1	72		2.2
	33.0	9.17	6.9		0.86	1.1	72		2.4
EAZS50/16-01104	15.4	4.29	7.3	1450	0.52	0.75	59	145	2.1
	25.7	7.15	6.6		0.66	1.1	70		2.2
	30.9	8.58	6.0		0.71	1.1	71.5		2.4
EAZS50/16-00754	14.4	3.99	6.3	1450	0.43	0.55	57.5	135	2.1
	24.0	6.66	5.7		0.55	0.75	67.5		2.2
	28.8	7.99	5.0		0.58	0.75	67		2.4
EAZS50/16-00554	13.3	3.70	5.4	1450	0.35	0.55	56	125	2.1
	22.2	6.16	4.6		0.42	0.55	66		2.2
	26.6	7.40	4.0		0.45	0.75	65		2.4
EAZS50/20-02204	18.0	5.00	15.3	1450	1.27	2.2	59	214	1.3
	30.0	8.33	13.3		1.67	2.2	65		1.5
	36.0	10.00	11.8		1.86	2.2	62		1.8
EAZS50/20-02204	17.2	4.79	14.0	1450	1.15	1.5	57.5	205	1.3
	28.7	7.98	12.0		1.45	2.2	64.5		1.5
	34.5	9.58	10.6		1.63	2.2	61		1.8
EAZS50/20-02204	16.4	4.55	12.5	1450	1.02	1.5	54.5	195	1.3
	27.3	7.59	10.7		1.26	2.2	63		1.5
	32.8	9.11	9.4		1.40	2.2	60		1.8
EAZS50/20-01504	15.6	4.32	11.1	1450	0.90	1.1	52	185	1.3
	25.9	7.20	9.6		1.11	1.5	61.5		1.5
	31.1	8.64	8.2		1.19	1.5	58.5		1.8
EAZS50/20-01504	14.7	4.09	9.8	1450	0.76	1.1	51.5	175	1.3
	24.5	6.81	8.3		0.95	1.5	58.5		1.5
	29.4	8.17	7.2		1.05	1.5	55		1.8
EAZS50/20-01104	13.9	3.85	8.6	1450	0.66	1.1	49	165	1.3
	23.1	6.42	7.1		0.81	1.1	55		1.5
	27.7	7.71	5.9		0.86	1.1	52		1.8
EAZS50/26-05504	19.2	5.33	25.0	1450	2.47	3	53	264	1.7
	32.0	8.89	23.5		3.25	4	63		1.8
	38.4	10.67	22.3		3.64	5.5	64		1.9
EAZS50/26-05504	18.5	5.15	23.1	1450	2.26	3	51.5	255	1.7
	30.9	8.59	21.7		2.95	4	62		1.8
	37.1	10.30	20.6		3.30	5.5	63		1.9
EAZS50/26-04004	17.8	4.95	21.4	1450	2.02	3	51.5	245	1.7
	29.7	8.25	20.0		2.61	4	62		1.8
	35.6	9.90	19.1		2.92	4	63.5		1.9
EAZS50/26-04004	17.1	4.75	19.8	1450	1.81	3	51	235	1.7
	28.5	7.91	18.6		2.36	3	61		1.8
	34.2	9.50	17.7		2.61	4	63		1.9
EAZS50/26-03004	16.4	4.55	18.2	1450	1.62	2.2	50	225	1.7
	27.3	7.58	17.0		2.10	3	60		1.8
	32.7	9.09	16.1		2.33	3	61.5		1.9
EAZS50/26-03004	15.6	4.34	16.6	1450	1.43	2.2	49.5	215	1.7
	26.1	7.24	15.5		1.85	3	59.5		1.8
	31.3	8.69	14.7		2.05	3	61		1.9
EAZS50/26-02204	14.9	4.14	15.1	1450	1.25	1.5	49	205	1.7
	24.9	6.90	14.0		1.62	2.2	58.5		1.8
	29.8	8.28	13.2		1.79	2.2	60		1.9

EAZS系列卧式直联式离心泵 性能参数表

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	%	mm	m
EAZS50/32-11004	30.2	8.40	35.6	1450	5.64	7.5	52	329	1.5
	50.4	14.00	31.1		7.36	11	58		2.2
	60.5	16.80	27.8		8.32	11	55		2.7
EAZS50/32-11004	29.0	8.04	32.5	1450	4.93	7.5	52	315	1.5
	48.3	13.40	27.3		6.24	7.5	57.5		2.2
	57.9	16.09	24.9		7.14	11	55		2.7
EAZS50/32-07504	27.6	7.66	29.4	1450	4.24	5.5	52	300	1.5
	46.0	12.77	25.1		5.51	7.5	57		2.2
	55.1	15.32	22.4		6.23	7.5	54		2.7
EAZS50/32-07504	26.2	7.28	26.1	1450	3.58	5.5	52	285	1.5
	43.7	12.13	22.4		4.75	7.5	56		2.2
	52.4	14.55	19.6		5.23	7.5	53.5		2.7
EAZS50/32-05504	24.8	6.89	23.0	1450	2.99	4	52	270	1.5
	41.4	11.49	19.8		3.98	5.5	56		2.2
	49.6	13.79	17.2		4.47	5.5	52		2.7
EAZS50/32-04004	23.4	6.51	20.2	1450	2.48	4	52	255	1.5
	39.1	10.85	19.8		3.83	4	55		2.2
	46.9	13.02	14.9		3.66	4	52		2.7
EAZS65/13-01504	29.0	8.05	6.4	1450	0.78	1.1	65	139	2.3
	48.3	13.41	5.5		0.93	1.5	78		2.4
	57.9	16.09	4.8		0.98	1.5	77		2.7
EAZS65/13-01104	27.1	7.53	5.5	1450	0.60	0.75	68	130	2.3
	45.2	12.54	4.6		0.72	1.1	78		2.4
	54.2	15.05	3.6		0.71	1.1	75		2.7
EAZS65/13-00754	25.0	6.95	4.6	1450	0.46	0.75	67.5	120	2.3
	41.7	11.58	3.8		0.56	0.75	77.5		2.4
	50.0	13.89	3.0		0.55	0.75	74		2.7
EAZS65/16-02204	30.0	8.33	10.2	1450	1.26	2.2	66	174	2
	50.0	13.89	8.8		1.54	2.2	78		2.3
	60.0	16.67	7.8		1.65	2.2	77		2.6
EAZS65/16-02204	28.5	7.90	9.2	1450	1.08	1.5	65.5	165	2
	47.4	13.17	7.5		1.26	2.2	77		2.3
	56.9	15.81	6.7		1.38	2.2	75		2.6
EAZS65/16-01504	26.7	7.42	8.1	1450	0.91	1.1	65	155	2
	44.5	12.37	7.1		1.14	1.1	75.5		2.3
	53.5	14.85	5.9		1.16	1.5	74		2.6
EAZS65/16-01504	25.0	6.95	7.1	1450	0.75	1.1	64	145	2
	41.7	11.58	6.0		0.92	1.5	74		2.3
	50.0	13.89	5.2		0.98	1.5	72		2.6
EAZS65/16-01104	23.3	6.47	6.1	1450	0.64	1.1	61	135	2
	38.8	10.78	5.2		0.76	1.1	72		2.3
	46.6	12.93	4.5		0.82	1.1	70		2.6
EAZS65/16-01104	21.6	5.99	5.5	1450	0.54	0.75	60	125	2
	35.9	9.98	4.5		0.63	1.1	69		2.3
	43.1	11.97	3.8		0.67	1.1	67		2.6
EAZS65/20-04004	33.0	9.16	15.6	1450	2.15	3	65	214	1.7
	55.0	15.27	13.7		2.83	4	72.5		1.9
	66.0	18.32	11.4		2.88	4	71		2.1
EAZS65/20-03004	31.6	8.78	14.1	1450	1.89	3	64	205	1.7
	52.7	14.63	12.4		2.45	3	72.5		1.9
	63.2	17.55	11.1		2.65	3	72		2.1
EAZS65/20-03004	30.1	8.35	12.8	1450	1.68	2.2	62	195	1.7
	50.1	13.91	11.2		2.12	3	72		1.9
	60.1	16.70	10.0		2.28	3	72		2.1
EAZS65/20-02204	28.5	7.92	11.4	1450	1.47	2.2	60	185	1.7
	47.5	13.20	10.0		1.81	2.2	71.5		1.9
	57.0	15.84	9.0		1.98	2.2	71		2.1

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	%	mm	m
EAZS65/20-02204	27.0	7.49	10.2	1450	1.34	2.2	56	175	1.7
	45.0	12.49	8.9		1.57	2.2	69.5		1.9
	53.9	14.98	7.8		1.66	2.2	69		2.1
EAZS65/20-02204	25.4	7.06	9.0	1450	1.13	1.5	55	165	1.7
	42.4	11.77	7.7		1.31	2.2	68		1.9
	50.9	14.13	6.8		1.43	2.2	66		2.1
EAZS65/26-07504	36.0	10.00	24.6	1450	4.09	5.5	59	264	1.7
	60.0	16.67	23.0		5.22	7.5	72		1.9
	72.0	20.00	21.7		5.83	7.5	73		2
EAZS65/26-07504	34.8	9.66	22.7	1450	3.64	5.5	59	255	1.7
	58.0	16.10	21.5		4.70	7.5	72		1.9
	69.6	19.32	20.0		5.19	7.5	73		2
EAZS65/26-05504	33.4	9.28	21.0	1450	3.29	4	58	245	1.7
	55.7	15.47	19.8		4.23	5.5	71		1.9
	66.8	18.56	18.3		4.59	5.5	72.5		2
EAZS65/26-05504	32.1	8.90	19.6	1450	3.00	4	57	235	1.7
	53.4	14.84	18.2		3.79	5.5	70		1.9
	64.1	17.81	17.0		4.12	5.5	72		2
EAZS65/26-05504	30.7	8.52	18.1	1450	2.70	4	56	225	1.7
	51.1	14.21	16.7		3.37	5.5	69		1.9
	61.4	17.05	15.3		3.70	5.5	69		2
EAZS65/26-04004	29.3	8.15	16.4	1450	2.38	3	55	215	1.7
	48.9	13.58	15.1		3.00	4	67		1.9
	58.6	16.29	13.9		3.31	4	67		2
EAZS65/26-04004	28.0	7.77	15.0	1450	2.15	3	53	205	1.7
	46.6	12.94	13.8		2.67	4	65.5		1.9
	55.9	15.53	12.5		2.93	4	65		2
EAZS65/32-15004	39.0	10.84	37.0	1450	7.28	11	54	329	1.9
	65.0	18.06	34.0		9.40	11	64		2
	78.0	21.67	31.7		10.36	15	65		2.1
EAZS65/32-11004	37.3	10.37	33.4	1450	6.35	7.5	53.5	315	1.9
	62.2	17.29	30.6		8.10	11	64		2
	74.7	20.75	28.4		8.95	11	64.5		2.1
EAZS65/32-11004	35.6	9.88	30.0	1450	5.48	7.5	53	300	1.9
	59.3	16.47	27.2		6.86	11	64		2
	71.1	19.76	24.8		7.50	11	64		2.1
EAZS65/32-07504	33.8	9.39	27.0	1450	4.78	7.5	52	285	1.9
	56.3	15.64	24.2		5.84	7.5	63.5		2
	67.6	18.77	21.8		6.32	7.5	63.5		2.1
EAZS65/32-07504	32.0	8.89	24.2	1450	4.18	5.5	50.5	270	1.9
	53.4	14.82	21.4		4.97	7.5	62.5		2
	64.0	17.79	19.0		5.34	7.5	62		2.1
EAZS65/32-05504	30.2	8.40	21.1	1450	3.54	5.5	49	255	1.9
	50.4	14.00	19.0		4.20	5.5	62		2
	60.5	16.80	16.6		4.55	5.5	60		2.1
EAZS80/16-03004	48.0	13.33	9.9	1450	1.96	3	66	174	2.3
	80.0	22.22	8.8		2.46	3	78		2.5
	96.0	26.66	7.9		2.68	3	77		3.7
EAZS80/16-03004	45.5	12.64	8.7	1450	1.66	2.2	65	165	2.3
	75.9	21.07	7.5		2.00	3	77.5		2.5
	91.0	25.28	6.5		2.15	3	75		3.7
EAZS80/16-02204	42.8	11.88	7.5	1450	1.39	2.2	63	155	2.3
	71.3	19.79	6.3		1.60	2.2	76.5		2.5
	85.5	23.75	5.3		1.73	2.2	71.5		3.7
EAZS80/16-02204	40.0	11.11	6.7	1450	1.18	1.5	62	145	2.3
	66.7	18.52	5.5		1.33	2.2	75		2.5
	80.0	22.22	4.5		1.40	2.2	70		3.7

EAZS系列卧式直联式离心泵 性能参数表

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	%	mm	m
EAZS80/16-01504	37.2	10.34	5.8	1450	0.97	1.5	61	135	2.3
	62.1	17.24	4.6		1.11	1.5	70		2.5
	74.5	20.69	3.8		1.13	1.5	68		3.7
EAZS80/20-07504	57.0	15.83	15.4	1450	3.46	5.5	69	214	1.9
	95.0	26.39	14.1		4.50	5.5	81		2
	114.0	31.67	13.1		4.99	7.5	81.5		2.4
EAZS80/20-05504	54.6	15.17	14.0	1450	3.06	4	68	205	1.9
	91.0	25.28	12.7		3.88	5.5	81		2
	109.2	30.34	11.6		4.26	5.5	81		2.4
EAZS80/20-04004	51.9	14.43	12.6	1450	2.74	4	65	195	1.9
	86.6	24.05	11.2		3.30	4	80		2
	103.9	28.86	10.1		3.57	4	80		2.4
EAZS80/20-04004	49.3	13.69	11.3	1450	2.41	3	63	185	1.9
	82.1	22.81	10.0		2.85	4	78.5		2
	98.6	27.38	8.8		3.03	4	78		2.4
EAZS80/20-03004	46.6	12.95	10.0	1450	2.05	3	62	175	1.9
	77.7	21.58	8.7		2.42	3	76		2
	93.2	25.90	7.5		2.54	3	75		2.4
EAZS80/20-03004	44.0	12.21	8.8	1450	1.74	3	60.5	165	1.9
	73.3	20.35	7.4		1.99	3	74		2
	87.9	24.42	6.4		2.13	3	72		2.4
EAZS80/26-11004	57.0	15.83	24.0	1450	5.64	7.5	66	264	1.6
	95.0	26.39	21.5		7.32	11	76		2
	114.0	31.67	19.5		8.07	11	75		2.4
EAZS80/26-11004	55.1	15.29	22.4	1450	4.94	7.5	68	255	1.6
	91.8	25.49	20.1		6.68	11	75		2
	110.1	30.59	17.9		7.45	11	72		2.4
EAZS80/26-07504	52.9	14.69	20.7	1450	4.44	5.5	67	245	1.6
	88.2	24.49	18.2		5.79	7.5	75.5		2
	105.8	29.39	16.3		6.34	7.5	74		2.4
EAZS80/26-07504	50.7	14.09	19.2	1450	3.99	5.5	66.5	235	1.6
	84.6	23.49	16.5		5.06	7.5	75		2
	101.5	28.19	14.7		5.56	7.5	73		2.4
EAZS80/26-07504	48.6	13.49	17.6	1450	3.50	5.5	66.5	225	1.6
	81.0	22.49	15.1		4.48	7.5	74.5		2
	97.2	26.99	13.2		4.78	7.5	73		2.4
EAZS80/26-05504	46.4	12.90	16.0	1450	3.06	4	66	215	1.6
	77.4	21.49	13.8		3.93	5.5	74		2
	92.8	25.79	11.9		4.18	5.5	72		2.4
EAZS80/26-05504	44.3	12.30	14.5	1450	2.67	4	65.5	205	1.6
	73.8	20.49	12.6		3.47	5.5	73		2
	88.5	24.59	10.7		3.66	5.5	70.5		2.4
EAZS80/32-18504	60.0	16.67	35.8	1450	10.08	15	58	329	1.5
	100.0	27.78	33.4		13.18	18.5	69		1.8
	120.0	33.34	31.3		14.40	18.5	71		2
EAZS80/32-15004	57.5	15.96	32.5	1450	8.92	11	57	315	1.5
	95.8	26.60	30.1		11.21	15	70		1.8
	114.9	31.92	28.4		12.56	15	70.7		2
EAZS80/32-15004	54.7	15.20	29.7	1450	7.83	11	56.5	300	1.5
	91.2	25.33	27.5		9.75	15	70		1.8
	109.4	30.40	25.6		10.79	15	70.7		2
EAZS80/32-11004	52.0	14.44	26.8	1450	6.77	11	56	285	1.5
	86.6	24.06	24.9		8.38	11	70.1		1.8
	104.0	28.88	22.8		9.14	11	70.6		2
EAZS80/32-11004	49.2	13.68	23.3	1450	5.58	7.5	56	270	1.5
	82.1	22.80	21.5		6.83	11	70.3		1.8
	98.5	27.36	19.7		7.50	11	70.4		2

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	%	mm	m
EAZS80/32-07504	46.5	12.92	20.4	1450	4.53	5.5	57	255	1.5
	77.5	21.53	18.8		5.63	7.5	70.5		1.8
	93.0	25.84	17.1		6.15	7.5	70.4		2
EAZS80/40-30004	60.0	16.67	56.5	1450	17.92	22	51.5	409	1.8
	100.0	27.78	52.2		23.11	30	61.5		2
	120.0	33.34	47.8		25.52	30	61.2		2.3
EAZS80/40-30004	58.0	16.10	52.1	1450	15.81	22	52	395	2.2
	96.6	26.83	47.8		20.44	30	61.5		2.4
	115.9	32.19	44.2		22.82	30	61.1		3.2
EAZS80/40-30004	55.8	15.49	48.3	1450	14.37	18.5	51	380	2.2
	92.9	25.81	44.2		18.18	22	61.5		2.4
	111.5	30.97	40.2		20.34	30	60		3
EAZS80/40-22004	53.5	14.87	44.2	1450	12.51	15	51.5	365	2.2
	89.2	24.79	40.2		15.93	18.5	61.3		2.3
	107.1	29.75	36.7		17.83	22	60		2.8
EAZS80/40-18504	51.3	14.26	40.2	1450	11.02	15	51	350	2.2
	85.6	23.77	36.5		14.08	18.5	60.4		2.3
	102.7	28.53	33.3		15.73	22	59.2		2.8
EAZS80/40-18504	49.1	13.65	36.8	1450	9.95	15	49.5	335	2.2
	81.9	22.75	33.5		12.53	15	59.6		2.3
	98.3	27.30	30.4		13.86	18.5	58.7		2.8
EAZS80/40-15004	46.9	13.04	33.2	1450	8.84	11	48	320	2.2
	78.2	21.73	30.4		11.11	15	58.3		2.3
	93.9	26.08	27.8		12.40	15	57.3		2.8
EAZS100/16-04004	75.6	21.00	8.8	1450	2.70	4	67	176	2
	126.0	35.00	7.2		3.05	4	81		2.1
	151.2	42.00	5.8		3.11	4	76.2		2.7
EAZS100/16-03004	70.9	19.69	7.8	1450	2.21	3	68	165	2
	118.1	32.81	6.2		2.51	3	79.5		2.1
	141.8	39.38	5.5		2.70	3	78.5		2.7
EAZS100/16-03004	66.6	18.49	6.8	1450	1.84	3	67	155	2
	111.0	30.82	5.5		2.14	3	77.6		2.1
	133.2	36.99	4.5		2.16	3	75.5		2.7
EAZS100/16-02204	62.3	17.30	6.0	1450	1.58	2.2	64.5	145	2
	103.8	28.84	4.8		1.78	2.2	76		2.1
	124.6	34.60	3.9		1.81	2.2	73		2.7
EAZS100/20-11004	85.2	23.66	14.9	1450	4.94	7.5	70	214	1.7
	142.0	39.44	13.0		6.28	7.5	80		1.9
	170.4	47.33	11.1		6.86	11	75		2.2
EAZS100/20-07504	81.6	22.67	13.4	1450	4.25	5.5	70	205	1.7
	136.0	37.78	11.5		5.39	7.5	79		1.9
	163.2	45.34	9.8		5.77	7.5	75.5		2.2
EAZS100/20-05504	77.6	21.56	12.1	1450	3.77	5.5	68	195	1.7
	129.4	35.94	10.0		4.57	5.5	77		1.9
	155.3	43.13	8.3		4.74	5.5	74		2.2
EAZS100/20-05504	73.6	20.46	10.8	1450	3.23	4	67	185	1.7
	122.7	34.10	8.7		3.85	5.5	75.5		1.9
	147.3	40.91	7.1		4.01	5.5	71		2.2
EAZS100/20-04004	69.7	19.35	9.5	1450	2.86	4	63	175	1.7
	116.1	32.25	7.3		3.14	4	73.5		1.9
	139.3	38.70	5.7		3.18	4	68		2.2
EAZS100/20-03004	65.7	18.25	8.3	1450	2.47	3	60	165	1.7
	109.5	30.41	6.1		2.57	3	70.8		1.9
	131.4	36.49	4.5		2.60	3	62		2.2
EAZS100/26-15004	88.8	24.67	24.7	1450	8.91	11	67	264	1.8
	148.0	41.11	22.0		11.36	15	78		2
	177.6	49.33	19.6		12.63	15	75		2.3

EAZS系列卧式直联式离心泵 性能参数表

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)			效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	%		mm	m
EAZS100/26-15004	85.8	23.83	22.8	1450	8.01	11	66.5	255		1.8
	143.0	39.71	20.4		10.38	15	76.5			2
	171.5	47.65	18.0		11.44	15	73.5			2.3
	82.4	22.89	21.1		7.17	7.5	66			1.8
EAZS100/26-11004	137.3	38.15	18.8	1450	9.39	11	75	245		2
	164.8	45.78	16.6		10.21	11	73			2.3
	79.0	21.96	19.3		6.39	7.5	65			1.8
	131.7	36.59	17.0		8.29	11	73.5			2
EAZS100/26-11004	158.1	43.91	14.9	1450	9.03	11	71	235		2.3
	75.7	21.02	17.6		5.85	7.5	62			1.8
	126.1	35.04	15.3		7.30	11	72			2
EAZS100/26-11004	151.4	42.04	13.2	1450	7.88	11	69	225		2.3
	72.3	20.09	16.0		5.08	7.5	62			1.8
	120.5	33.48	13.6		6.20	7.5	72			2
EAZS100/26-11004	144.6	40.18	11.5	1450	6.61	11	68.5	215		2.3
	69.0	19.15	14.4		4.58	7.5	59			1.8
	114.9	31.92	12.0		5.52	7.5	68			2
EAZS100/26-07504	137.9	38.31	10.0	1450	5.87	7.5	64	205		2.3
	81.0	22.50	38.0		12.32	15	68			2
	135.0	37.50	34.0		16.10	22	77.6			2.2
EAZS100/32-22004	162.0	45.00	30.2	1450	18.24	22	73	329		2.7
	77.6	21.54	34.4		10.84	15	67			2
	129.3	35.90	31.0		14.31	18.5	76.2			2.2
EAZS100/32-22004	155.1	43.09	27.6	1450	16.19	22	72	315		2.7
	73.9	20.52	31.1		9.47	15	66			2
	123.1	34.19	28.0		12.68	18.5	74			2.2
EAZS100/32-18504	147.7	41.03	25.0	1450	14.16	18.5	71	300		2.7
	70.2	19.49	28.2		8.29	11	65			2
	116.9	32.48	25.0		11.13	15	71.5			2.2
EAZS100/32-15004	140.3	38.98	22.1	1450	12.70	15	66.5	285		2.7
	66.5	18.47	25.7		7.50	11	62			2
	110.8	30.78	22.3		9.89	11	68			2.2
EAZS100/32-15004	132.9	36.93	19.8	1450	11.13	15	64.5	270		2.7
	62.8	17.44	22.9		6.64	11	59			2
	104.6	29.07	19.8		8.68	11	65			2.2
EAZS100/32-15004	125.6	34.88	16.8	1450	9.57	15	60	255		2.7
	90.7	25.20	56.8		22.62	30	62			1.5
	151.2	42.00	51.8		30.03	37	71			1.8
EAZS100/40-45004	181.4	50.40	47.0	1450	34.39	45	67.5	409		2.1
	87.6	24.34	52.4		20.49	30	61			1.5
	146.0	40.56	47.4		27.11	37	69.5			1.8
EAZS100/40-37004	175.2	48.67	42.6	1450	30.79	37	66	395		2.1
	84.3	23.41	48.2		18.43	30	60			1.5
	140.5	39.02	43.4		24.77	37	67			1.8
EAZS100/40-37004	168.6	46.83	38.8	1450	27.18	37	65.5	380		2.1
	81.0	22.49	44.5		16.91	22	58			1.5
	134.9	37.48	39.5		21.82	30	66.5			1.8
EAZS100/40-30004	161.9	44.98	35.0	1450	24.11	30	64	365		2.1
	77.6	21.56	40.6		14.92	18.5	57.5			1.5
	129.4	35.94	35.9		19.45	22	65			1.8
EAZS100/40-30004	155.3	43.13	31.7	1450	21.44	30	62.5	350		2.1
	74.3	20.64	37.5		13.55	18.5	56			1.5
	123.8	34.40	32.9		17.33	22	64			1.8
EAZS100/40-22004	148.6	41.28	28.8	1450	19.10	22	61	335		2.1
	71.0	19.72	34.0		11.94	15	55			1.5
	118.3	32.86	29.8		15.23	18.5	63			1.8
EAZS100/40-22004	142.0	39.43	25.8	1450	16.90	22	59	320		2.1


型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	%	mm	m
EAZS125/20-11004	114.5	31.80	15.0	1450	7.54	11	62	214	1.3
	190.8	53.00	13.3		8.74	11	79		1.7
	229.0	63.60	11.7		9.29	11	78.5		1.85
EAZS125/20-11004	109.7	30.46	13.3	1450	6.51	11	61	205	1.3
	182.8	50.77	11.5		7.43	11	77		1.7
	219.3	60.93	9.9		7.78	11	76		1.85
EAZS125/20-07504	104.3	28.98	11.7	1450	5.63	7.5	59	195	1.3
	173.9	48.29	9.7		6.12	7.5	75		1.7
	208.6	57.95	8.1		6.39	7.5	72		1.85
EAZS125/20-07504	99.0	27.49	10.2	1450	4.74	7.5	58	185	1.3
	164.9	45.82	8.0		5.13	7.5	70		1.7
	197.9	54.98	6.3		5.14	7.5	66		1.85
EAZS125/26-22004	144.0	40.00	24.0	1450	13.25	18.5	71	264	2.2
	240.0	66.67	22.2		17.27	22	84		2.8
	288.0	80.00	20.5		19.25	22	83.5		3.3
EAZS125/26-22004	139.1	38.64	21.9	1450	11.68	15	71	255	2.2
	231.8	64.40	20.1		15.19	18.5	83.5		2.8
	278.2	77.28	18.3		16.70	22	83		3.3
EAZS125/26-18504	133.6	37.12	20.0	1450	10.39	15	70	245	2.2
	222.7	61.87	18.3		13.37	18.5	83		2.8
	267.3	74.25	16.5		14.73	18.5	81.5		3.3
EAZS125/26-15004	128.2	35.61	18.3	1450	9.12	11	70	235	2.2
	213.6	59.35	16.4		11.78	15	81		2.8
	256.4	71.22	14.5		12.65	15	80		3.3
EAZS125/26-15004	122.7	34.09	16.6	1450	8.04	11	69	225	2.2
	204.6	56.82	14.4		10.02	15	80		2.8
	245.5	68.19	12.4		10.83	15	76.5		3.3
EAZS125/26-11004	117.3	32.58	14.9	1450	7.00	11	68	215	2.2
	195.5	54.30	12.7		8.66	11	78		2.8
	234.6	65.15	10.7		9.36	11	73		3.3
EAZS125/26-11004	111.8	31.06	13.3	1450	6.04	7.5	67	205	2.2
	186.4	51.77	11.0		7.44	11	75		2.8
	223.6	62.12	9.0		8.00	11	68.5		3.3
EAZS125/32-30004	120.1	33.36	35.0	1450	17.60	22	65	329	1.7
	200.2	55.60	32.7		22.41	30	79.5		2.2
	240.2	66.72	30.8		24.86	30	81		2.7
EAZS125/32-30004	115.0	31.94	31.9	1450	15.36	18.5	65	315	1.7
	191.6	53.23	29.9		19.75	30	79		2.2
	230.0	63.88	28.2		22.07	30	80		2.7
EAZS125/32-22004	109.5	30.42	29.0	1450	13.40	18.5	64.5	300	1.7
	182.5	50.70	27.0		17.09	22	78.5		2.2
	219.0	60.84	25.5		19.00	22	80		2.7
EAZS125/32-18504	104.0	28.90	26.2	1450	11.59	15	64	285	1.7
	173.4	48.16	24.4		14.77	18.5	78		2.2
	208.1	57.80	22.9		16.21	18.5	80		2.7
EAZS125/32-15004	98.6	27.38	23.2	1450	9.73	11	64	270	1.7
	164.3	45.63	21.4		12.59	15	76		2.2
	197.1	54.76	19.9		13.69	15	78		2.7
EAZS125/32-15004	93.1	25.86	20.6	1450	8.42	11	62	255	1.7
	155.1	43.09	18.8		10.73	15	74		2.2
	186.2	51.71	17.3		11.54	15	76		2.7
EAZS125/40-75004	147.0	40.83	56.6	1450	34.84	45	65	409	1.5
	245.0	68.05	52.5		47.00	55	74.5		2.8
	294.0	81.66	48.7		52.67	75	74		4
EAZS125/40-55004	142.0	39.43	51.9	1450	31.34	37	64	395	1.5
	236.6	65.72	47.6		42.00	55	73		2.8
	283.9	78.86	43.8		46.69	55	72.5		4

EAZS系列卧式直联式离心泵 性能参数表

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	%	mm	m
EAZS125/40-45004	136.6	37.93	47.7	1450	28.15	37	63	380	1.5
	227.6	63.22	43.1		37.35	45	71.5		2.8
	273.1	75.87	39.7		41.57	45	71		4
EAZS125/40-45004	131.2	36.44	43.4	1450	25.00	30	62	365	1.5
	218.6	60.73	39.8		33.36	37	71		2.8
	262.4	72.88	36.5		37.24	45	70		4
EAZS125/40-37004	125.8	34.94	39.9	1450	22.40	30	61	350	1.5
	209.6	58.23	36.6		30.27	37	69		2.8
	251.6	69.88	33.2		33.44	37	68		4
EAZS125/40-37004	120.4	33.44	36.8	1450	20.10	30	60	335	1.5
	200.7	55.74	33.5		27.31	30	67		2.8
	240.8	66.89	30.1		29.45	37	67		4
EAZS125/40-30004	115.0	31.95	33.3	1450	17.67	22	59	320	1.5
	191.7	53.24	30.1		23.80	30	66		2.8
	230.0	63.89	27.0		26.01	30	65		4
EAZS150/20-18504	216.0	60.00	14.1	1450	13.37	18.5	62	214	3
	360.0	100.00	12.2		14.95	18.5	80		3.5
	432.0	120.00	10.6		16.51	18.5	75.5		4
EAZS150/20-18504	206.9	57.48	12.8	1450	11.82	15	61	205	3
	344.9	95.79	10.8		13.00	15	78		3.5
	413.8	114.95	9.2		14.20	18.5	73		4
EAZS150/20-15004	196.8	54.67	11.5	1450	10.44	15	59	195	3
	328.0	91.12	9.5		11.24	15	75.5		3.5
	393.6	109.35	7.8		11.94	15	70		4
EAZS150/20-15004	186.7	51.87	10.2	1450	9.10	11	57	185	3
	311.2	86.45	8.2		9.78	15	71		3.5
	373.5	103.74	6.6		10.32	15	65		4
EAZS150/20-11004	176.6	49.07	8.9	1450	8.07	11	53	175	3
	294.4	81.78	6.9		8.38	11	66		3.5
	353.3	98.13	5.3		8.64	11	59		4
EAZS150/26-30004	194.4	54.00	23.1	1450	16.98	22	72	264	1.7
	324.0	90.00	21.0		22.73	30	81.5		2.1
	388.8	108.00	17.9		25.26	30	75		4
EAZS150/26-30004	187.8	52.16	21.2	1450	15.05	18.5	72	255	1.7
	313.0	86.93	18.9		20.38	30	79		2.1
	375.5	104.32	15.6		22.15	30	72		4
EAZS150/26-22004	180.4	50.11	19.3	1450	13.35	18.5	71	245	1.7
	300.7	83.52	16.7		17.75	22	77		2.1
	360.8	100.23	13.4		19.36	22	68		4
EAZS150/26-18504	173.0	48.07	17.6	1450	11.84	15	70	235	1.7
	288.4	80.11	14.7		15.49	18.5	74.5		2.1
	346.1	96.14	11.2		16.49	18.5	64		4
EAZS150/26-18504	165.7	46.02	15.9	1450	10.70	15	67	225	1.7
	276.1	76.70	12.6		13.15	18.5	72		2.1
	331.4	92.05	9.3		14.22	18.5	59		4
EAZS150/26-15004	158.3	43.98	14.2	1450	9.42	11	65	215	1.7
	263.9	73.30	10.3		11.56	15	64		2.1
	316.6	87.95	7.1		12.00	15	51		4
EAZS150/32-55004	222.0	61.67	36.0	1450	29.80	37	73	329	2.1
	370.0	102.78	34.0		40.53	55	84.5		3
	444.0	123.34	31.2		45.16	55	83.5		4
EAZS150/32-45004	212.6	59.04	32.7	1450	25.92	30	73	315	2.1
	354.3	98.41	30.3		35.21	45	83		3
	425.1	118.09	27.1		38.72	45	81		4
EAZS150/32-37004	202.4	56.23	29.3	1450	22.43	30	72	300	2.1
	337.4	93.72	26.6		30.16	37	81		3
	404.9	112.46	23.4		32.65	37	79		4

型号 Model	流量 Capacity		扬程 Head	转速 Speed	功率 Power(kw)		效率 Eff.	叶轮名义直径 Impeller Dia.	汽蚀余量 (NPSH)r
	m³/h	L/s	m	r/min	轴 Shaft	电机 Motor	%	mm	m
EAZS150/32-30004	192.3	53.42	26.2	1450	19.32	22	71	285	2.1
	320.5	89.03	23.0		25.40	30	79		3
	384.6	106.84	19.7		27.14	30	76		4
EAZS150/32-30004	182.2	50.61	23.2	1450	16.44	22	70	270	2.1
	303.7	84.35	19.8		21.26	30	77		3
	364.4	101.22	16.5		22.42	30	73		4
EAZS150/32-22004	172.1	47.80	20.2	1450	13.71	18.5	69	255	2.1
	286.8	79.66	16.6		17.28	22	75		3
	344.1	95.59	13.0		17.65	22	69		4
EAZS150/40-90004	231.0	64.16	54.5	1450	51.15	75	67	409	2
	385.0	106.94	49.5		63.65	75	81.5		3.3
	462.0	128.33	43.9		70.78	90	78		4.6
EAZS150/40-75004	223.1	61.97	50.0	1450	46.01	55	66	395	2
	371.8	103.28	45.3		57.31	75	80		3.3
	446.2	123.94	39.8		62.78	75	77		4.6
EAZS150/40-75004	214.6	59.61	46.0	1450	40.72	55	66	380	2
	357.7	99.36	41.4		51.03	75	79		3.3
	429.2	119.23	36.0		55.35	75	76		4.6
EAZS150/40-55004	206.1	57.26	42.4	1450	36.05	45	66	365	2
	343.6	95.44	37.7		45.79	55	77		3.3
	412.3	114.52	32.8		49.75	55	74		4.6
EAZS150/40-45004	197.7	54.91	38.6	1450	31.95	37	65	350	2
	329.4	91.51	34.1		40.24	45	76		3.3
	395.3	109.82	29.6		42.19	45	75.5		4.6
EAZS150/40-45004	189.2	52.55	35.4	1450	28.49	37	64	335	2
	315.3	87.59	31.2		36.69	45	73		3.3
	378.4	105.11	27.0		38.63	45	72		4.6
EAZS150/40-37004	180.7	50.20	32.1	1450	24.87	30	63.5	320	2
	301.2	83.67	28.4		31.90	37	73		3.3
	361.5	100.40	24.4		33.35	37	72		4.6

EAZS系列卧式直联式离心泵 机组外形及安装尺寸表

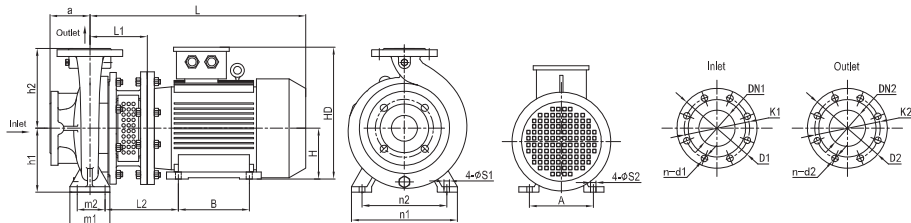

法兰标准尺寸(ISO7005.2 DIN2501 PN16 GB/T17241.6 PN1.6)

DN1/DN2	32	40	50	65	80	100	125	150	200
D1/D2	140	150	165	185	200	220	250	285	340
K1/K2	100	110	125	145	160	180	210	240	295
n-d1/n-d2	4-Φ18	4-Φ18	4-Φ18	4-Φ18	8-Φ18	8-Φ18	8-Φ18	8-Φ22	12-Φ22

EAZS型号	电机Motor(B35)	进出水法兰	水泵安装尺寸(mm)																		重量Weight(kg)																			
Model	型号Model	功率kw	DN1	DN2	a	h1	h2	L1	L2	L	A	B	H	HD	m1	m2	n1	n2	S1	S2	单泵	电机	机组总重																	
EAZS32/13-00554	Y2-801-4	0.55	50	32				152	167	407	125	100	80	220				190	140		10		27	16	43															
EAZS32/13-01102	Y2-802-2	1.1							173	422	140	125	90	250									27	17	44															
EAZS32/13-01502	Y2-90S-2	1.5							173	447													27	21	48															
EAZS32/13-02202	Y2-90L-2	2.2							167	407	125	100	80	220									27	26	52															
EAZS40/13-00554	Y2-801-4	0.55	65	40	80	112	140	152	167	407	125	100	80	220					210	160		12		29	16	45														
EAZS40/13-01502	Y2-90S-2	1.5							173	422	140	125	90	250										30	21	51														
EAZS40/13-02202	Y2-90L-2	2.2							173	447														30	26	55														
EAZS40/13-03002	Y2-100L-2	3							192	489	160	140	100	270										32	44	76														
EAZS40/13-04002	Y2-112M-2	4	65	40	80	112	140	164	199	504	190	140	112	300	100	70								32	43	75														
EAZS40/13-00554	Y2-801-4	0.55							173	422	140	125	90	250																										
EAZS50/13-00754	Y2-802-4	0.75								447																														
EAZS50/13-01104	Y2-90S-4	1.1							152	167	407	125	100	80										220												14		30	16	46
EAZS50/13-01104	Y2-90S-4	1.1	152	173	422	140	90	250	31	22	54																													
EAZS50/13-03002	Y2-100L-2	3	164	192	489	160	140	100	270	39	44	83																												
EAZS50/13-04002	Y2-112M-2	4	164	199	504	190	140	112	300	39	43	82																												
EAZS50/13-05502	Y2-132S1-2	5.5	65	50	100	132	160	164	187	241	577	216	132	345										40	65	105														
EAZS50/13-07502	Y2-132S2-2	7.5							187	241	577	216	132	345										40	69	109														
EAZS65/13-00754	Y2-802-4	0.75							152	154.5	407	125	100	80										220														36	17	53
EAZS65/13-01104	Y2-90S-4	1.1								160.5	422	140	125	90										250														37	22	60
EAZS65/13-01504	Y2-90L-4	1.5	80	65	100	160	180	152	160.5	422	140	125	90	250										37	27	64														
EAZS65/13-05502	Y2-132S1-2	5.5							187	228.5	577	216	140	132										345	46	65	111													
EAZS65/13-07502	Y2-132S2-2	7.5							187	228.5	577	216	140	132										345	46	69	115													
EAZS65/13-11002	Y2-160M1-2	11							219	279.5	724	254	210	160										420	15	54	108	162												
EAZS32/16-00554	Y2-801-4	0.55	50	32	80	132	160	152	167	407	125	100	80	220								10		31	16	48														
EAZS32/16-00754	Y2-802-4	0.75							173	422	140	125	90	250										33	17	49														
EAZS32/16-02202	Y2-90L-2	2.2							173	447	140	125	90	250										32	26	57														
EAZS32/16-03002	Y2-100L-2	3							164	192	489	160	100	270										33	44	77														
EAZS32/16-04002	Y2-112M-2	4	65	40	80	132	160	164	192	504	190	140	112	300										33	43	76														
EAZS32/16-05502	Y2-132S1-2	5.5							187	241	577	216	132	345										38	65	103														
EAZS40/16-00554	Y2-801-4	0.55							152	167	407	125	100	80										220														32	16	48
EAZS40/16-00754	Y2-802-4	0.75								167	407	125	100	80										220														32	17	49
EAZS40/16-01104	Y2-90S-4	1.1	65	40	80	132	160	164	173	422	140	100	90	250										33	22	56														
EAZS40/16-03002	Y2-100L-2	3							192	489	160	140	100	270										35	44	79														
EAZS40/16-04002	Y2-112M-2	4							199	504	190	140	112	300										35	43	78														
EAZS40/16-05502	Y2-132S1-2	5.5							187	241	577	216	140	132										345	39	65	104													
EAZS40/16-07502	Y2-132S2-2	7.5	80	65	100	160	180	152	219	279.5	724	254	210	160	420									39	69	108														
EAZS65/16-00554	Y2-801-4	0.55							160.5	422	140	1																												

EAZS系列卧式直联式离心泵 安装尺寸表

EAZS型号	电机Motor(B35)	进出水法兰		水泵安装尺寸(mm)																	重量Weight(kg)		
Model	型号Model 功率kw	DN1	DN2	a	h1	h2	L1	L2	L	A	B	H	HD	m1	m2	n1	n2	S1	S2	单泵	电机	机组总重	
EAZS100/20-03004	Y2-100L2-4 3	125	100	125	200	280	180	183	505	160	140	100	270	160	120	360	280	18	12	68	37	105	
EAZS100/20-04004	Y2-112M-4 4						190	520	190	140	112	300	68							47	115		
EAZS100/20-05504	Y2-132S-4 5.5						203	232	593	216	140	132	345							69	65	134	
EAZS100/20-07504	Y2-132M-4 7.5						232	311	898	318	305	200	505							69	79	147	
EAZS100/20-11004	Y2-160M-4 11						235	283	740	254	210	160	420							72	108	180	
EAZS100/20-15004	Y2-200L1-2 30						311	898	318	305	200	505	79							224	303		
EAZS100/20-17502	Y2-200L2-2 37						327	943	356	311	225	560	83							286	369		
EAZS100/20-22502	Y2-225M-2 45						380	1042	406	349	250	615	89							373	469		
EAZS100/20-28002	Y2-280S-2 55						402	1117	457	368	280	680	96							485	580		
EAZS100/20-35002	Y2-315M-2 75						427	1272	487	398	300	700	104							518	640		
EAZS125/20-07504	Y2-132M-4 7.5	150	125	140	250	315	203	232	633	216	178	132	345	160	120	360	280	18	12	92	79	171	
EAZS125/20-11004	Y2-160M-4 11						235	283	740	254	210	160	420							96	108	204	
EAZS125/20-15002	Y2-225M-2 45						238	327	943	356	311	225	560							106	286	392	
EAZS125/20-17502	Y2-250M-2 55						380	1042	406	349	250	615	118							373	491		
EAZS125/20-22502	Y2-280S-2 75						402	1117	457	368	280	680	119							485	604		
EAZS125/20-28002	Y2-315M-2 90						427	1272	487	398	300	700	122							541	663		
EAZS150/20-11004	Y2-160M-4 11						295	767	254	241	160	420	96							108	204		
EAZS150/20-15004	Y2-160L-4 15						308	852	279	241	180	455	96							129	225		
EAZS150/20-18504	Y2-180M-4 18.5						330	914	300	254	200	505	98							157	255		
EAZS32/26-02204	Y2-100L1-4 2.2						50	32				174	187.5							499	160	140	100
EAZS32/26-03004	Y2-100L2-4 3	174	187.5	499	160	140						100	270	55	37	92							
EAZS32/26-11002	Y2-160M1-2 11	229	287.5	734	254	210						160	420	63	108	171							
EAZS32/26-15002	Y2-160M2-2 15	229	287.5	789	254	210						160	420	63	109	173							
EAZS32/26-18502	Y2-160L-2 18.5	300.5	819	279	241	180						455	63	133	196								
EAZS32/26-22502	Y2-180M-2 22	300.5	819	279	241	180						455	64	155	219								
EAZS40/26-02204	Y2-100L1-4 2.2	174	187.5	499	160	140						100	270	55	34	89							
EAZS40/26-03004	Y2-100L2-4 3	174	187.5	499	160	140						100	270	55	37	92							
EAZS40/26-11002	Y2-160M1-2 11	229	287.5	734	254	210						160	420	63	108	171							
EAZS40/26-15002	Y2-160M2-2 15	229	287.5	789	254	210						160	420	63	109	172							
EAZS40/26-18502	Y2-160L-2 18.5	300.5	819	279	241	180	455	63	133	195													
EAZS40/26-22502	Y2-180M-2 22	300.5	819	279	241	180	455	63	155	218													
EAZS50/26-02204	Y2-100L1-4 2.2	65	50				175	187.5	500	160	140	100	270						12	56	34	90	
EAZS50/26-03004	Y2-100L2-4 3						175	187.5	500	160	140	100	270							56	37	93	
EAZS50/26-04004	Y2-112M-4 4						194.5	515	190	178	112	300	56							47	103		
EAZS50/26-05504	Y2-132S-4 5.5						198	236.5	588	216	140	132	345							60	65	125	
EAZS50/26-18502	Y2-160L-2 18.5						230	287.5	790	254	254	160	420							62	133	195	
EAZS50/26-22502	Y2-200L-2 22						300.5	820	279	241	180	455	65							155	220		
EAZS50/26-30002	Y2-180M1-2 30						315.5	893	318	305	200	505	71							224	295		
EAZS50/26-37002	Y2-200L2-2 37						315.5	893	318	305	200	505	71							235	306		
EAZS65/26-04004	Y2-112M-4 4						180	190	520	190	140	112	300							66	47	113	
EAZS65/26-05504	Y2-132S-4 5.5						203	232	593	216	140	132	345							68	65	133	
EAZS65/26-07504	Y2-132M-4 7.5	232	311	898	318	305	200	505	68	79	147												
EAZS65/26-30002	Y2-200L1-2 30	238	311	898	318	305	200	505	80	224	304												
EAZS65/26-37002	Y2-200L2-2 37	238	311	898	318	305	200	505	80	235	315												
EAZS65/26-45002	Y2-225M-2 45	238	327	943	356	311	225	560	84	286	370												
EAZS65/26-55002	Y2-250M-2 55	272	380	1042	406	349	250	615	24	98	373												
EAZS80/26-05504	Y2-132S-4 5.5	203	232	593	216	140	132	345	75	65	140												
EAZS80/26-07504	Y2-132M-4 7.5	232	311	898	318	305	200	505	75	79	153												
EAZS80/26-11004	Y2-160M-4 11	235	283	740	254	210	160	420	81	108	189												
EAZS80/26-37002	Y2-200L2-2 37	311	898	318	305	200	505	100	235	335													
EAZS80/26-45002	Y2-225M-2 45	327	943	356	311	225	560	102	286	388													
EAZS80/26-55002	Y2-250M-2 55	380	1042	406	349	250	615	105	373	478													
EAZS80/26-75002	Y2-280S-2 75	402	1117	457	368	280	680	105	485	589													
EAZS100/26-07504	Y2-132M-4 7.5	207	236	637	216	178	132	345	85	79	164												
EAZS100/26-11004	Y2-160M-4 11	239	287	744	254	210	160	420	89	108	197												
EAZS100/26-15004	Y2-160L-4 15	279	799	254	254				89	129	217												
EAZS100/26-55002	Y2-250M-2 55	384	1046	406	349	250	615		105	373	478												
EAZS100/26-75002	Y2-280S-2 75	406	1121	457	368	280	680		112	485	597												
EAZS100/26-90002	Y2-280M-2 90	406	1171	457	368	280	680		112	541	653												
EAZS125/26-11004	Y2-160M-4 11	287	744	254	210	160	420		104	108	212												
EAZS125/26-15004	Y2-160L-4 15	299	799	254	254				104	129	233												
EAZS125/26-18504	Y2-180M-4 18.5	300	829	279	279	180	455		104	157	261												
EAZS125/26-22004	Y2-180L-4 22	300	869	279	279	180	455		104	179	283												
EAZS125/26-30004	Y2-200L-4 30	242	315	901	318	305	200	505	19	110	240												
EAZS150/26-15004	Y2-160L-4 15	248	281	808	254	254	160	420	15	135	129												
EAZS150/26-18504	Y2-180M-4 18.5	294	838	279	241	180	455		135	157	292												
EAZS150/26-22004	Y2-180L-4 22	294	878	279	279	180	455		135	179	314												
EAZS150/26-30004	Y2-200L-4 30	306	908	318	305	200	505		19	154	240												

EAZS型号	电机Motor(B35)	进出水法兰		水泵安装尺寸(mm)																	重量Weight(kg)		
Model	型号Model功率kw	DN1	DN2	a	h1	h2	L1	L2	L	A	B	H	HD	m1	m2	n1	n2	S1	S2	单泵	电机	机组总重	
EAZS40/32-03004	Y2-100L2-4																				75	37	112
EAZS40/32-04004	Y2-112M-4							180	195.5	505	160	140	100	270						12	75	47	122
EAZS40/32-05504	Y2-132S-4								202.5	520	190	140	112	300							79	65	144
EAZS40/32-07504	Y2-132M-4							202	243.5	592	632	216	140	132	345						79	79	157
EAZS40/32-22002	Y2-180M-2																			15	84	155	239
EAZS40/32-30002	Y2-200L1-2																				88	224	313
EAZS40/32-37002	Y2-200L2-2																			19	88	235	323
EAZS40/32-45002	Y2-225M-2																				96	286	381
EAZS40/32-55002	Y2-250M-2																						
EAZS40/32-55002	Y2-250M-2																						
EAZS50/32-04004	Y2-112M-4																			24	114	373	487
EAZS50/32-05504	Y2-132S-4																				77	47	124
EAZS50/32-07504	Y2-132M-4																			12	81	65	147
EAZS50/32-11004	Y2-160M-4																				81	79	160
EAZS50/32-37002	Y2-200L2-2																			15	86	108	194
EAZS50/32-45002	Y2-225M-2																				91	235	325
EAZS50/32-55002	Y2-250M-2																			19	98	286	384
EAZS50/32-75002	Y2-280S-2																			24	116	373	490
EAZS50/32-75002	Y2-280S-2																				117	485	601
EAZS65/32-05504	Y2-132S-4																			12	92	65	157
EAZS65/32-07504	Y2-132M-4																				92	79	171
EAZS65/32-11004	Y2-160M-4																			15	95	108	203
EAZS65/32-15004	Y2-160L-4																				95	129	224
EAZS65/32-45002	Y2-225M-2																			19	116	286	401
EAZS65/32-55002	Y2-250M-2																				122	373	496
EAZS65/32-75002	Y2-280S-2																			24	122	485	607
EAZS65/32-90002	Y2-280M-2																				122	541	663
EAZS80/32-07504	Y2-132M-4																			12	95	79	174
EAZS80/32-11004	Y2-160M-4																				100	108	208
EAZS80/32-15004	Y2-160L-4																			15	100	129	229
EAZS80/32-18504	Y2-180M-4																				105	157	262
EAZS80/32-75002	Y2-280S-2																			24	127	485	612
EAZS80/32-90002	Y2-280M-2																				127	541	668
EAZS100/32-11004	Y2-160M-4																				105	108	213
EAZS100/32-15004	Y2-160L-4																			15	105	129	233
EAZS100/32-18504	Y2-180M-4																				105	157	262
EAZS100/32-22004	Y2-180L-4																				105	179	283
EAZS100/32-30004	Y2-200L-4																			19	111	240	351
EAZS125/32-15004	Y2-160L-4																				138	129	266
EAZS125/32-18504	Y2-180M-4																			15	138	157	295
EAZS125/32-22004	Y2-180L-4																				138	179	316
EAZS125/32-30004	Y2-200L-4																				140	240	379
EAZS125/32-37004	Y2-225S-4																			19	148	301	449
EAZS150/32-22004	Y2-180L-4																			23	155	179	332
EAZS150/32-30004	Y2-200L-4																				155	240	395
EAZS150/32-37004	Y2-225S-4																			19	163	301	464
EAZS150/32-45004	Y2-250M-4																				163	312	476
EAZS150/32-55004	Y2-250M-4																			24	178	383	561
EAZS80/40-15004	Y2-160L-4																				140	129	269
EAZS80/40-18504	Y2-180M-4																			15	142	157	299
EAZS80/40-22004	Y2-180L-4																				142	179	321
EAZS100/40-30004	Y2-200L-4																				148	240	387
EAZS100/40-22004	Y2-180L-4																			15	160	179	339
EAZS100/40-30004	Y2-200L-4																				162	240	401
EAZS100/40-37004	Y2-225S-4																			19	168	301	469
EAZS100/40-45004	Y2-225M-4																				178	312	480
EAZS125/40-30004	Y2-200L-4																				160	240	410
EAZS125/40-37004	Y2-225S-4																			19	176	301	476
EAZS125/40-45004	Y2-250M-4																				176	312	488
EAZS125/40-55004	Y2-250M-4																			24	180	383	562
EAZS150/40-75004	Y2-280S-4																				181	544	725
EAZS150/40-37004	Y2-225S-4																			19	200	301	501
EAZS150/40-45004	Y2-250M-4																				200	312	512
EAZS150/40-55004	Y2-250M-4																				203	383	586
EAZS150/40-75004	Y2-280S-4																				205	544	748
EAZS150/40-90004	Y2-280M-4																						

故障检修备查表

故障现象	故障原因
启动时水泵不出水	1*2*3*4*5*6*7*8*9*10*11*14*16*17*22*23*24*34*37
启动后水泵停止出水	2*3*4*5*6*7*8*9*10*11*12*13*22*23*24*34*37
水泵过热和/或中止出水	1*3*9*10*11*21*22*27*29*30*31*33*34*38*39
流量不足	2*3*4*5*6*7*8*9*10*11*14*16*17*20*21*22*23*24*25*26*34
流量过大	15*18*20*34
出水压力过高	4*14*16*18*20*22*23*24*26*34
轴封明显漏水	27*28*29*30*33*34*35*36*37*39
轴封提前失效	12*13*27*28*29*30*33*34*35*36*37*39
水泵耗用功率过高	12*13*15*16*18*19*20*23*25*27*28*31*33*34*35*42
水泵运行不平稳、噪音大	2*3*4*5*6*7*8*9*10*11*15*17*18*21*23*24*27*28*29*30*31*32*33*34*38*39*40*43*44
轴承过热和/或提前失效	27*28*29*30*31*32*33*34*38*39*40*41*42*43*44

可能的故障原因

- 1.水泵内的空气未排净；
2.水泵和进水管路未完全充水；
3.水泵所需进水压头（汽蚀余量）太高，或者水泵使用时净进水压头过低；
4.所输送的流体中混有空气或气体过多；
5.进水管路内有气囊；
6.进气管路内突然进入空气；
7.空气通过轴封进入水泵；
8.进水管路入口浸入不足；
9.进水阀门关闭或仅部分开启；
10.进水过滤器被堵塞；
11.底阀被堵塞或太小；
12.轴封的冷却液体很小或没有；
13.法兰密封垫未定位在进水口相对侧，因而限制水流；
14.水泵转速过低；
15.水泵转速过高；
16.水泵转向错误或叶轮反向安装；
17.背压高于水泵总额定出水压力；
18.背压低于水泵总额定出水压力；
19.流体密度与订购水泵时不同；
20.流体粘度与订购水泵时不同；
21.水泵运行时流量控制地过低（出水阀可能过度节流）；
22.水泵用于并联运行时，所选水泵的特性不适于并联；
- 23.叶轮通道被堵塞；
24.叶轮损坏；
25.泵壳和叶轮密封环严重损坏；
26.内部密封件失效导致外部设备（冲洗、冷却）压力冲进泵体；
27.水泵轴同轴度不够；
28.轴因弯曲而振动；
29.因叶轮不平衡导致水泵运行不平稳；
30.因轴承损伤导致轴运转不正常；
31.叶轮与泵壳内壁摩擦；
32.混凝土减振基础块的尺寸过小不足以稳定水泵；
33.水泵在安装过程中同轴度变动；
34.水泵安装运行条件与订购时的要求不符；
35.轴套被流体中的杂质或腐蚀物损伤或腐蚀；
37.机械密封因干运转而损坏；
38.因叶轮对中出现严重的轴侧向力（偏负荷）；
39.轴承磨损；
40.轴承在安装时被损坏或更换润滑油脂时异物进入轴承；
41.润滑油脂过多导致过热；
42.润滑油脂不足导致轴承失效；
43.异物进入轴承；
44.潮气进入轴承箱（悬架）导致轴承锈蚀。

管路及管路附件损失估算

管径 (mm)	流量(L/s)																												
	1	2	4	6	8	10																							
25	3.27	13.0																											
38	2.8	11.0	55.0				15	20																	直管摩擦损失简表（供估计用） 管100m直管损失米数（以新铸铁 管为标准,旧管加倍）				
50	0.8	3.1	13.0	29.0					25	30																			
65		0.8	3.2	7.1	13.0	20.0					40	50																	
75		0.4	1.6	3.3	5.9	9.6	21.6						60	70															
100			0.4	0.8	1.3	2.1	6.8	8.6	13.0	19.4					80	90													
125				0.23	0.4	0.63	1.3	2.7	4.1	5.9	10.7					100	110												
150					0.16	0.26	0.58	1.1	1.6	2.3	4.2	6.4	9.4					120	130										
175						0.11	0.27	0.5	0.74	1.05	1.9	2.9	4.3	5.8	7.7	9.6				140	160								
200							0.13	0.26	0.37	0.53	0.93	1.5	2.1	2.9	3.7	4.7	6.1	7.2	8.5			180	200						
250								0.07	0.12	0.18	0.3	0.48	0.68	0.93	1.2	1.5	1.9	2.3	2.8	3.3	3.7	4.9	6.5						
300									0.07	0.12	0.19	0.27	0.37	0.49	0.61	0.76	0.9	1.1	1.3	1.5	2.0	2.4	3.0						

直管摩擦损失简表（供估计用）
管100m直管损失米数以新铸铁
管为标准,旧管加倍

一定管路直径之最大流量限制

管路直径 (mm)	最大流量 (L/s)	最大流速 (m/s)	管路直径 (mm)	最大流量 (L/s)	最大流速 (m/s)
25	1.0	2.04	125	30.0	2.44
38	2.5	2.2	150	43.0	2.45
50	4.17	2.12	175	60.0	2.49
65	6.67	2.01	200	83.3	2.69
75	10.0	2.26	250	133.3	2.72
100	18.4	2.33	300	192.0	2.71

注：超过此管路损失显著增加

每个阀及弯管折合直管长度

种 类	折合管路直径倍数	备 注
全开闸阀	13	未畅开加倍
标准弯管	25	
逆止阀	100	
底阀	100	部分堵塞加倍

注：例如100mm直径管、底阀折合100倍直径等于100*100 =10000mm =10m直管长度，假定流量为8L/s查上表，直管每100m损失1.3m，则10m损失0.13m，即100m底阀流量为8L/s时，则损失扬程0.13m