

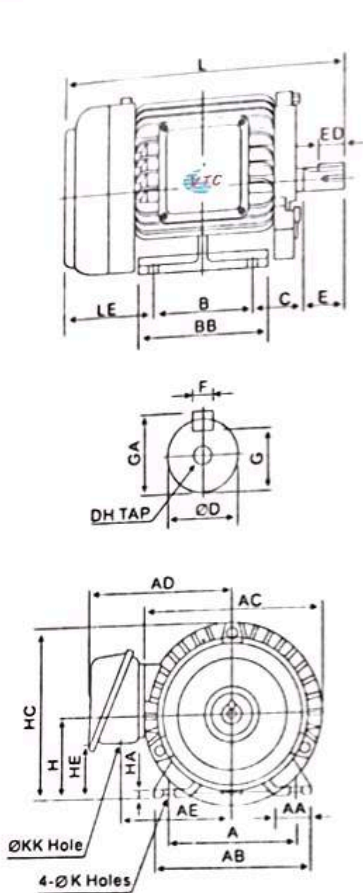


FIG.1

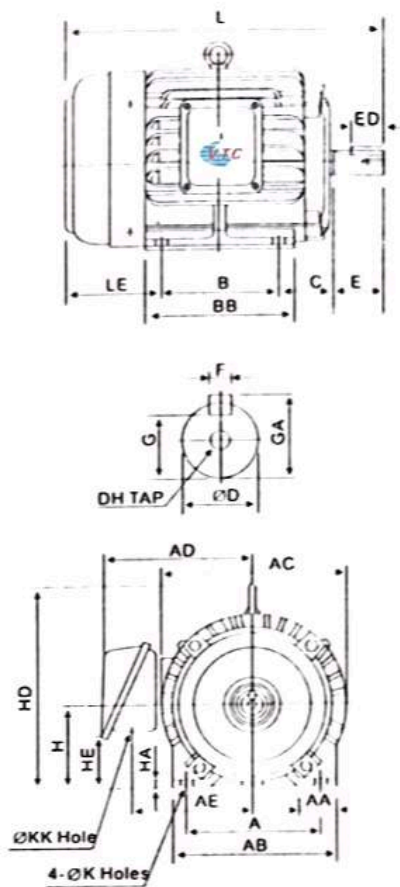


FIG.2

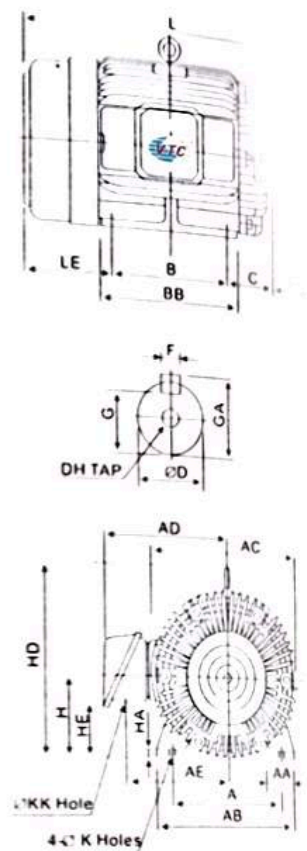


FIG.3

OUTPUT (HP) 輸出馬力			FRAME 框號	FIGURE NO. 圖號	A	AA	AB	AC	AD	AE	B	BA	BB	C	H	HA	HC	HD	HE
2P	4P	6P																	
0.5	0.5	0.25	71	1	112	35.5	140	162	133	103	90	-	115	45	71	8.0	152.0	-	54
1	1	0.5	80		125	35.5	155	177	144	112	100	-	130	50	80	9.0	168.0	-	55
	1.5		90L		140	40	165	177	140	113	100	-	145	54	90	10.0	176.0	-	49
2	2	1	90L	2	140	35.5	170	200	157	125	125	-	150	56	90	10.0	190.0	-	65
-	3	2	100L		160	45	195	219	180	145	140	-	175	63	100	12.5	-	243	71
5	5	3	112M		190	45	224	235	189	154	140	-	175	70	112	14.0	-	265	83
7.5	7.5	5	132S		216	45	250	273	225	180	140	-	175	89	132	16.0	-	310	83
-	10	7.5	132M		216	45	250	273	225	180	178	-	212	89	132	16.0	-	310	83
1.5	15	10	160M	3	254	50	300	334	263	218	210	-	250	108	160	18.0	-	377	108
25	20	15	160L								254		300						
30	-	-	180MC	4	279	75	355	382	305	250	241	-	297	121	180	20.0	-	421	119
-	25	20	180MA	3															
40	-	-	180LA	4															
-	40	25	180LC	3	279	75	355	382	305	250	279	-	335	121	180	20.0	-	421	119
50	60	-	200LA	4	318	80	400	458	362	299	305	-	365	133	200	25.0	-	499	129
-	50	60	200LC																
75	-	-	225SA																
-	75	60	225SC																
100	-	-	250SA	5	406	110	500	545	499	384	311	-	385	168	250	32.0	-	592	139
-	100	75	250SC																

備註：

1. 心軸直徑公差：Ø 11-Ø 28: J6, Ø 38-Ø 48: k6, Ø 55-Ø 75: m6.
2. 心軸高度公差：+0, -0.5
3. 圖片，尺寸，規格若有修改，恕不另行通知