


Submersible Pump for Wastewater Treatment <C/A/S3> Series



**Select the installation type and the impeller type to meet the conditions of use.
You can choose the best pump from a wide variety of models.**


Extensive Lineup to Meet a Wide Range of Needs.

ShinMaywa C/A/S3 series submersible pumps for wastewater treatment permit selection of the installation type and the impeller type to meet the conditions where they are installed. Installation types include the guide rail installation type and the free standing type. Impeller types include the multi-vane semi-open impeller, channel impeller, vortex impeller, screw impeller, and chopper/grinder mechanism type. The lineup also includes series such as “non-clog scroll submersible pumps,” which feature high pump efficiency and high solid passage capability achieved by a newly developed impeller and pump housing that saves energy and reduces maintenance cost, and lightweight “NORUS submersible pumps” made of high-functional resin and stainless steel. Select the best pump to meet your needs.

* For the high pump efficiency and high solid passage capability “non-clog scroll submersible pumps” and high-functional resin lightweight “NORUS submersible pumps,” refer to the separate catalogs.


Discharge connection

The pump is automatically connected to the discharge pipe.

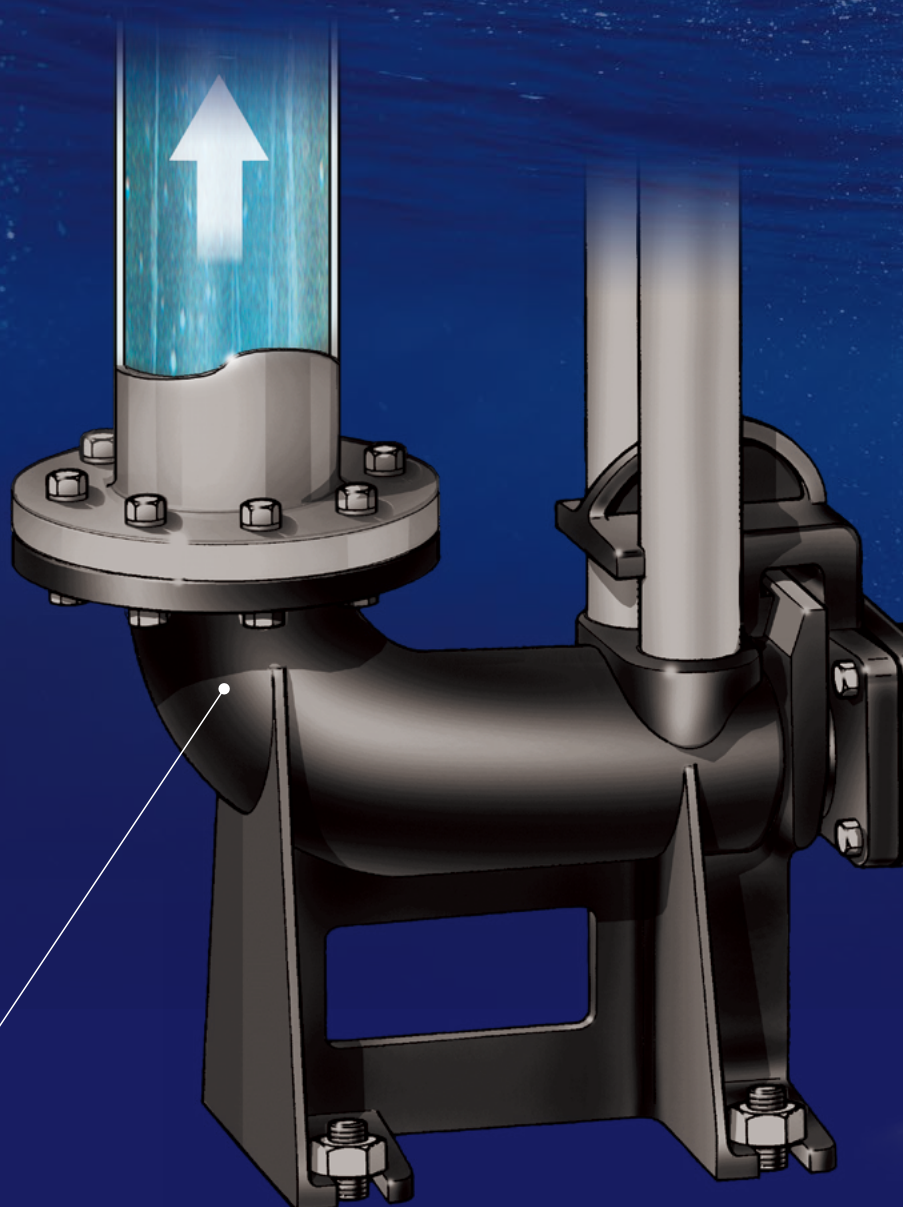



Cable entry with core wire seal

The core wire seal shuts the water out from penetrating into the motor through the core wire.



Motor protector

Thermal protector (a built-in automatic reset type motor protector) or thermal switches are embedded to the motor winding.







Air-filled submersible motor

Shaft seal

A highly wear resistant double mechanical seal is employed. Besides, combined use of an oil seal further extends the life. (except for some models)

Impeller

Select the impeller suitable for your application. Each impeller is dynamically balanced.

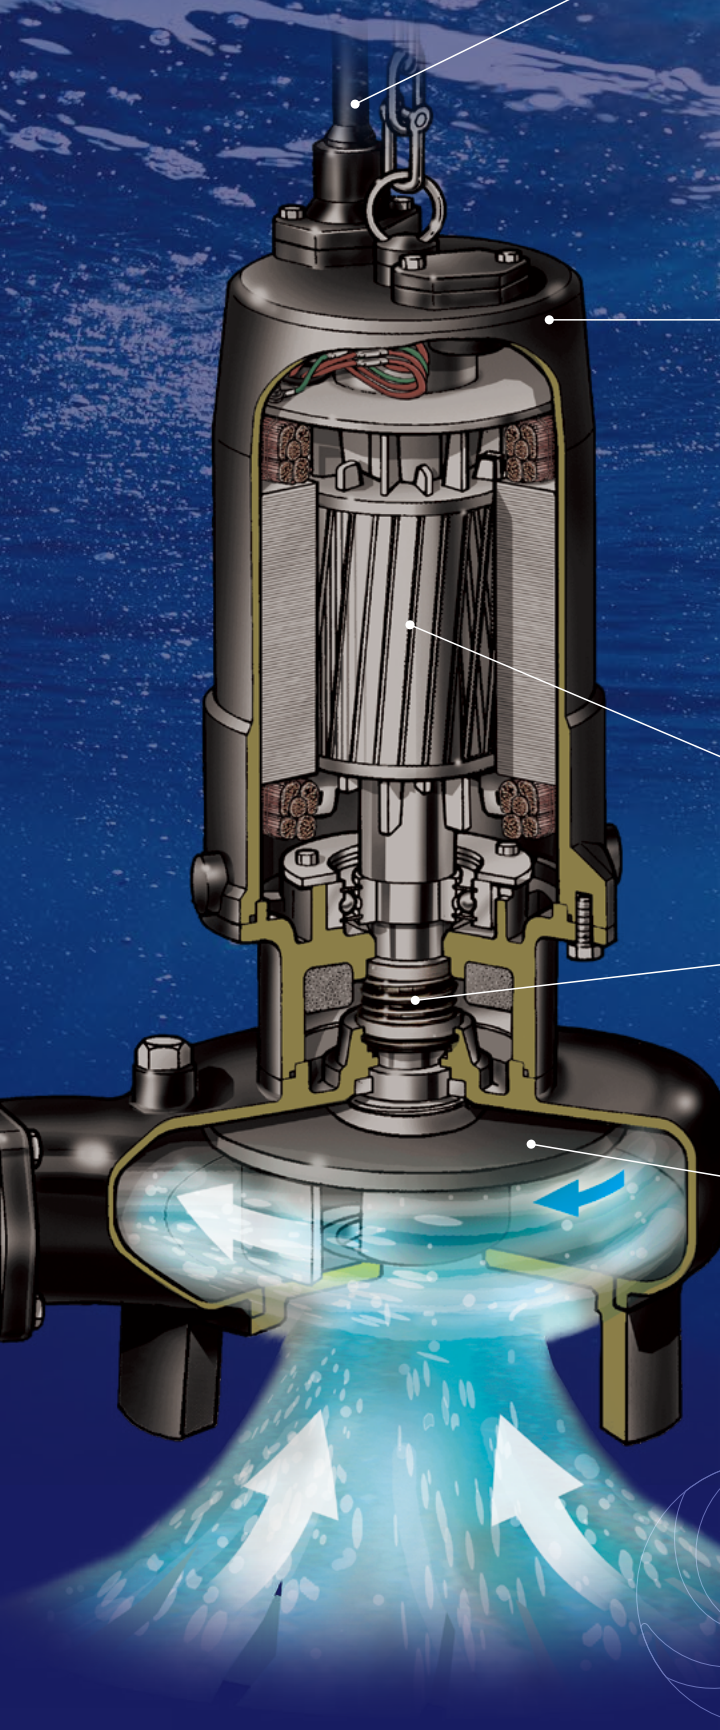

Complete Lineup of ShinMaywa Submersible Pumps for Wastewater Treatment


 indicate models that are featured in this catalog. For models that are not featured here, see the catalog and handbook for the model in which you are interested.

Channel impeller	CN·CN-MT·CNH Semi-open P.6, 7	CNMJ-MTC Solid size: 3-inch P.8	CN (Large discharge size) Forced cooling	CN (Large discharge size) Natural cooling	CNL 4-pole P.9	CNT Vertical dry pit type P.9	CNWX Non-clog scroll
	CNX Solid size: 3-inch Closed loop cooling	CNX Solid size: 3-inch Natural cooling					
Chopper / Cutter / Grinder pump	CJ Chopper pump P.10	CK Cutter pump P.11	CKM Grinder pump P.12				
Vortex impeller	CV-MT·CV·CVH P.13, 14	CVS-MT·CVS High efficiency/high head P.15, 16	CVC-MT·CVC Solid size: 70% of discharge size P.17	CVM Solid size: 100% of discharge size P.18			
With flywheel	CNF Channel	CWF Screw	CVF Vortex				
Screw impeller	CW·CWH P.19, 20	CWT Vertical dry pit type P.20					
Multi-vane semi-open impeller	A P.21	AH High head P.22					
Stainless steel submersible pump	S3A Multi-vane semi-open P.24	S3N Channel P.25	S3V Vortex P.26				
Axial/mixed flow	SD Mixed flow	SD-N High speed type	SA Vertical axial flow	SAH Horizontal axial flow	SAH-L Low water level type		
Float pump	FP						
Light-weight submersible pump, NORUS	CR High solid passage capability	CRS High efficiency	CRC High head				
Vertical dry pit type	CNT Channel P.9	CWT Screw P.20					

List of Models Featured in this Catalog

Impeller	Discharge size (mm)							Model	Rated output (kw)													
	150	100	80	65	50	40	32		0.25	0.4	0.75	1.0	1.2	1.5	2.2	3.7	5.5	7.5	11	15	22	
Channel impeller	●	●	●	●	●	●		CN-MT·CN·CNH Semi-open	●	●	●			●	●	●	●	●	●	●	●	
		●	●					CNMJ-MT Solid size: 3-inch						●	●	●	●	●				
			●	●	●			CNL 4-pole	●	●	●			●								
	●	●	●	●				CNT Vertical dry pit type						●	●	●	(6/6.5)	●	(11/13)	●	●	
Chopper / Cutter / Grinder pump		●	●	●	●			CJ Chopper pump			●			●	●	●	●	●				
		●	●					CK Cutter pump								●	●	(3.7/4.5)	(5.5/5.9)			
					●	●	●	CKM Grinder pump		●	●	●	●	●	●	●						
Vortex impeller	●	●	●	●	●			CV-MT·CV·CVH		●	●			●			●	●	●	●	●	
		●	●	●	●	●		CVS-MT·CVS High efficiency/high head	●	●	●			●	●	●	●	●	●			
		●	●	●	●			CVC-MT·CVC Solid size: 70% of discharge size	●	●	●			●	●	●	●	●				
	●	●	●	●	●			CVM Solid size: 100% of discharge size		●	●			●	●	●	●	●				
Screw impeller	●	●	●	●				CW·CWH						●	●	●	●	●	●	●	●	
	●	●	●	●				CWT Vertical dry pit type						●	●	●	●	●	●	●	●	
Multi-vane semi-open impeller			●	●	●	●		A	●	●	●			●								
		●	●	●	●	●		AH High head		●	●			●	●	●	●	●	●			
Stainless steel submersible pump				●	●	●		S3A Multi-vane semi-open	●	●	●			●								
		●	●	●	●	●		S3N Channel	●	●	●			●	●	●	●	●				
		●	●	●	●	●		S3V Vortex	●	●	●			●	●	●	●	●				

Impeller type

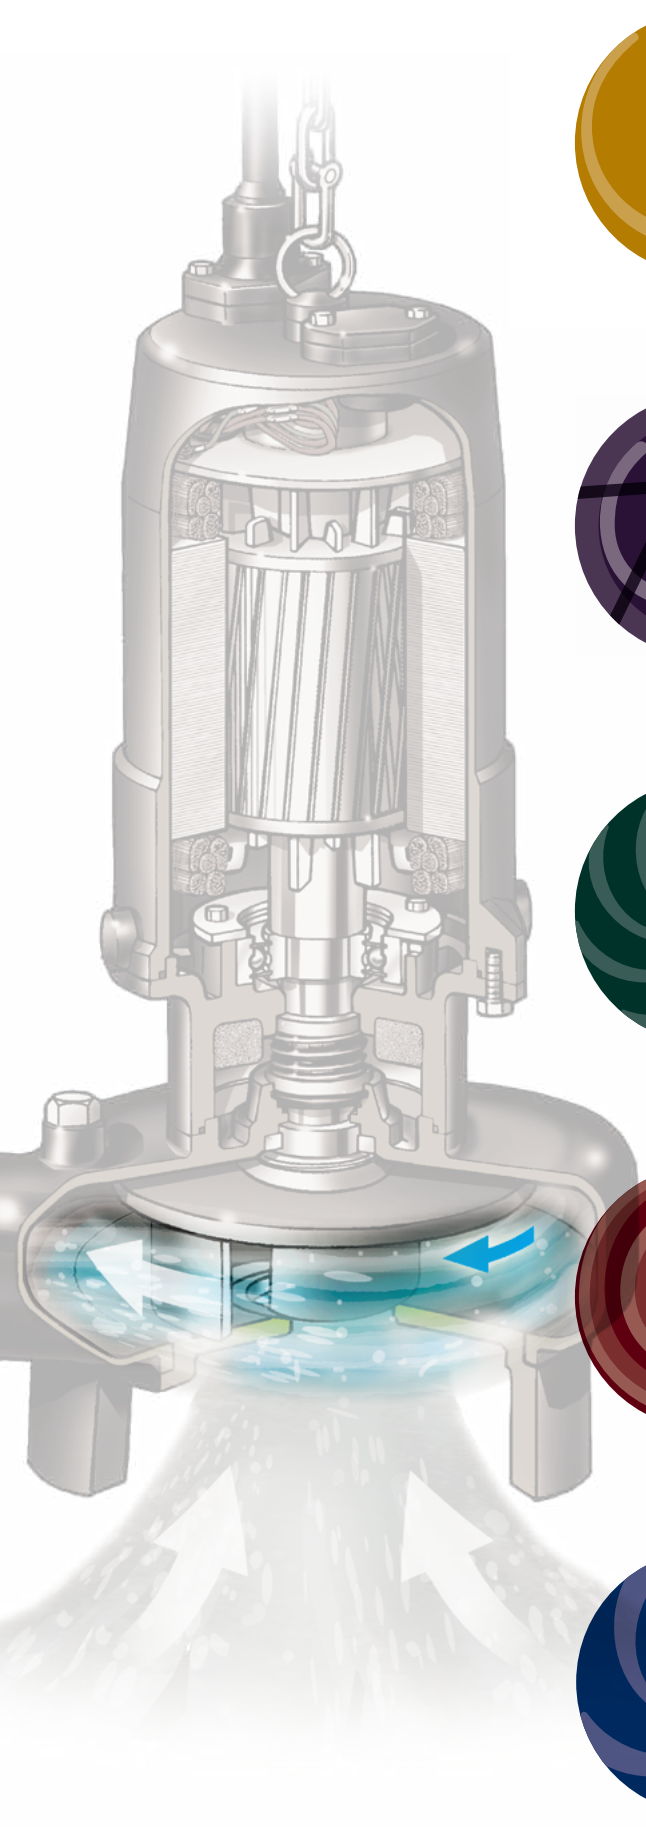


Channel impeller

Provides high pump efficiency is applicable to wide range of flow rates varying and discharge heads

Transferring or discharging sewage, sludge and wastewater containing a lot of uniformly shaped solids

- Treatment processes at various wastewater treatment plants
- Pump station in the sewage/wastewater collection system
- Effluent from building facilities as sanitary equipment
- Draining stormwater from roads or underpass
- Treatment processes at industrial wastewater treatment system
- Kitchen drainage, agricultural water supply/drainage and other general drainage



Chopper / Cutter / Grinder pump

Incorporates a mechanism to prevent solids clogging and tangling. The submersible grinder pump grinds solids.

Transferring or discharging sewage and wastewater containing solids

- As sanitary equipment and for effluent discharge from building facilities
- Pressure sewage system (submersible grinder pump)




Vortex impeller

Provides high solid passage capability, but not for high flow applications due to relatively low pump efficiency.

Transferring or discharging sewage and wastewater containing fibrous material

- Pump stations in the sewage/wastewater collection system
- Transferring and discharging sludge and scum from industrial wastewater treatment system
- Transferring and discharging sludge, wastewater containing solids from food processing plants and dairy farms
- For raw water/equalization tank at night-soil treatment plants
- For raw water/equalization tank at onsite wastewater treatment system



Screw impeller

Provides high pump efficiency and high solid passage capability. The screw effect makes it suitable for transferring highly concentrated sludge.

Transferring or discharging sewage and wastewater containing uniformly-shaped and fibrous material

- Transferring or discharging wastewater containing debris and sludge from various processes of wastewater treatment plants
- Pump station in the sewage/wastewater collection system
- Domestic wastewater from household, apartments or commercial buildings



Multi-vane semi-open impeller

Provides high pump efficiency and achieves high head at low power

Transferring or discharging fresh water or wastewater containing less suspended solid

- Defoaming, backwashing or filtering at onsite wastewater treatment systems
- Discharging treated water from sewage treatment plants or onsite wastewater treatment systems
- Simple agricultural or gardening use
- Draining stormwater, sewage water or spring water
- Draining stormwater or spring water from underpass or tunnels
- Effluent from buildings, factories, garages or basements

Channel impeller



For sewage and wastewater containing a large amount of uniformly shaped solids and sludge
Applicable to a wide range of flow rates varying and discharge heads

Channel impeller Semi-open

CN-MT

CN-MT



0.25 to 1.5kW



CN651-MT-F65



CN651-MT-P65

Standard Specifications



Discharge mm	Pump model	Installation kit No.		Rated output kW	Phase	Flow - Total head m ³ /min-m		No. of poles	Solid passage dia. (Soft solid) (mm)		Pump weight kg
		Guide rail installation	Free standing			50Hz	60Hz		50Hz	60Hz	
40	CN401T-MT	P40	F40	0.25	3	0.1 — 5.5	0.1 — 5.5	2	21	20	17
50	CN501T-MT	P50	F50	0.4	3	0.15 — 6.0	0.15 — 6.0	2	28	24	17
	CN501-MT			0.75		0.2 — 8.2	0.2 — 7.5		30	29	18
65	CN501T-MT	P65B	F65B	0.4	3	0.15 — 6.0	0.15 — 6.0	2	28	24	17
	CN501-MT			0.75		0.2 — 8.2	0.2 — 7.5		30	29	18
	CN651-MT			1.5		0.4 — 10.6	0.4 — 10.0		41	33	29
80	CN651-MT	P80	F80	1.5	3	0.4 — 10.6	0.4 — 10.0	2	41	33	29

* The starting method is direct-on-line. Note: Please inform us of the pump model and installation kit number.

Cable specifications



- 0.25~0.75kW: VCT 1.25mm²×4cores outer dia.φ11.5mm 6m
- 1.5kW : VCT 1.25mm²×4cores outer dia.φ11.5mm 8m
- * VCT: PVC insulated PVC sheathed cable

Performance Curves 0.25 to 1.5kW

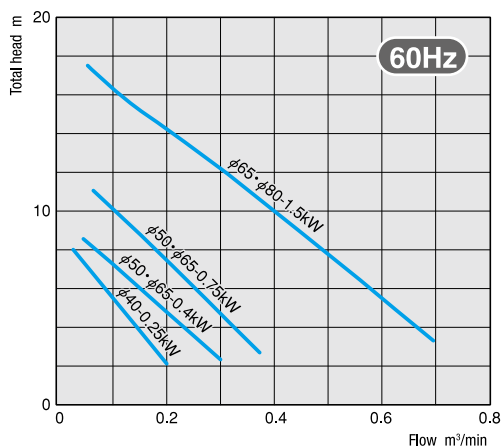
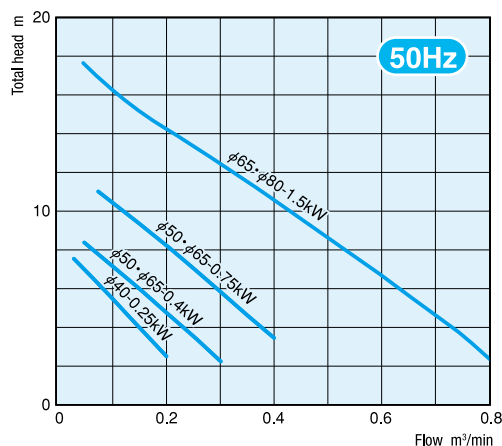


Dimensions (Unit:mm)

● Free standing type



● Guide rail installation type



	Pump model	Installation kit No.	Rated output kW	A	B	C	D
Free standing type	CN401T-MT	F40	0.25	414	249	170	135
	CN501 (T)-MT	F50	0.4	414	249	170	135
	F65B	0.75	414	344	170	135	
	CN651-MT	F65	1.5	454	418	192	140
Guide rail installation type	F80			433			
	CN401T-MT	P40	0.25	460	447	170	180
	CN501 (T)-MT	P50	0.4	460	447	170	180
	P65B	0.75	460	520	170	180	
	CN651-MT	P65	1.5	530	663	192	215
	P80			570	739	192	255

CN-MT·CN·CNH



● Semi-open Type



● Closed Type (CNH100·CN150(-MT))

2.2 to 22kW



CN150(-MT)-F150

CN150(-MT)-P150



Standard Specifications

Discharge mm	Pump model	Installation kit No.		Rated output kW	Phase	Flow - Total head m³/min-m		No. of poles	Solid passage dia. (Soft solid) (mm)		Pump weight kg		
		Guide rail installation	Free standing			50Hz	60Hz		50Hz	60Hz			
						(1) 1.0 — 11.8 (3) 0.8 — 14.4	(2) 0.8 — 8.6 (4) 0.9 — 11.8		(1) 1.0 — 11.8 (3) 0.8 — 14.4	(2) 0.8 — 8.6 (4) 0.9 — 11.8			
65	CN80 -MT	P65	F65	2.2	3	0.8 — 8.4	0.8 — 8.6	4	54	51	58		
				3.7		(1) 1.0 — 11.8 (3) 0.8 — 14.4	1.0 — 11.8		53	54	70		
80	CN80 -MT	P80B	F80	2.2	3	0.8 — 8.4	0.8 — 8.6	4	54	51	58		
				3.7		(1) 1.0 — 11.8 (3) 0.8 — 14.4	1.0 — 11.8		53	54	70		
	CN100 -MT			5.5		(1) 1.2 — 12.9 (3) 0.9 — 18.0	(2) 1.2 — 13.6 (4) 0.9 — 18.0		60	53	95		
				7.5		(1) 1.4 — 15.2 (3) 1.0 — 21.8	(2) 1.4 — 16.7 (4) 1.0 — 22.5		60	53 60	108		
						CN80 -MT	2.2		0.8 — 8.4	0.8 — 8.6	54	51	58
							3.7		(1) 1.0 — 11.8 (3) 0.8 — 14.4	1.0 — 11.8	53	54	70
100	CN100 -MT	P100B	F100	5.5	3	(1) 1.2 — 12.9 (3) 0.9 — 18.0	(2) 1.2 — 13.6 (4) 0.9 — 18.0	4	60	53	95		
				7.5		(1) 1.4 — 15.2 (3) 1.0 — 21.8	(2) 1.4 — 16.7 (4) 1.0 — 22.5		60	53 60	108		
	CNH100					11	1.57 — 22		1.58 — 22	54	54	216	
						15	1.9 — 26		1.86 — 26	55	55	230	
	CN150 -MT			5.5		2.0 — 10.0	1.96 — 10.0		70	65	122		
				7.5		2.48 — 12.0	2.33 — 12.0		75	70	134		
150	CN150	P150	F150	11	3	2.54 — 16.0	2.6 — 16.0	4	64	57	215		
				15		2.87 — 19.0	3.0 — 19.0		70	62	228		
	CN150			22		3.60 — 22.0	3.86 — 22.0		76	67	326		



* The starting method is direct-on-line for 7.5 kW or less and star-delta for 11 kW and over. () indicates the impeller number.
Note: Please inform us of the pump model and installation kit number.

Dimensions (Unit: mm)

● Free standing type



● Guide rail installation type




	Pump model	Installation kit No.	Rated output kW	A	B	C	D		Pump model	Installation kit No.	Rated output kW	A	B	C	D	E	F			
Free standing type	CN80 -MT	F65	2.2	554	509	292	190	Guide rail installation type	CN80 -MT	P65	2.2	584	754	292	220	600	500			
			3.7	615	528	331					700	600								
		F80	2.2	554	524	292				260	P80B	2.2	624	830	292	600	500			
			3.7	615	543	331						700	600							
	CN100 -MT	F100	2.2	554	541	292	190		CN100 -MT	P100B	2.2	624	843	292	260	600	500			
			3.7	615	560	331					700	600								
		F80	5.5	640	601	355				260	P80B	5.5	710	907	355	700	600			
			7.5	685	616	387						7.5	755	922	387					
	CNH100	F100	5.5	640	618	355	255	CNH100		P100B	5.5	710	920	355	335	900	700			
			7.5	685	633	387					7.5	755	935	387						
		F100B	11	782	848	486				22	P100C	11	861	1,110				486	900	700
			15	876	870	529						15	955	1,132				529		
	CN150 -MT	F150	5.5	713	836	400	260		CN150 -MT	P150	5.5	779	1,094	400	325	900	700			
			7.5	758	836	400					7.5	824	1,094	400						
		CN150	11,15	805	890	450				280	22	11,15	871	1,148	450			345		
			22	915	930	489						295	22	967	1,188				489	

Cable specifications

- 2.2kW: VCT 1.25mm²×4 cores outer dia.φ11.5mm 8m
- 3.7kW: VCT 1.25mm²×4 cores outer dia.φ12 mm 8m
- 5.5kW: VCT 2.0 mm²×4 cores outer dia.φ14 mm 8m
- 7.5kW: VCT 3.5 mm²×4 cores outer dia.φ16.5mm 8m
- 11kW: 2PNCT 1.25mm²×2 cores outer dia.φ9.8 mm 8m
- 11kW: 2PNCT 5.5 mm²×3 cores outer dia.φ15.5mm 8m
- 11kW: 2PNCT 5.5 mm²×4 cores outer dia.φ17 mm 8m
- 15kW: 2PNCT 1.25mm²×2 cores outer dia.φ9.8 mm 8m
- 15kW: 2PNCT 8.0 mm²×3 cores outer dia.φ17 mm 8m
- 15kW: 2PNCT 8.0 mm²×4 cores outer dia.φ18.5mm 8m
- 22kW: 2PNCT 1.25mm²×2 cores outer dia.φ9.8 mm 8m
- 22kW: 2PNCT 14 mm²×3 cores outer dia.φ20 mm 8m
- 22kW: 2PNCT 14 mm²×4 cores outer dia.φ22 mm 8m


* VCT: PVC insulated PVC sheathed cable
2PNCT: EPR insulated PCP sheathed cable

Performance Curves 2.2 to 22kW

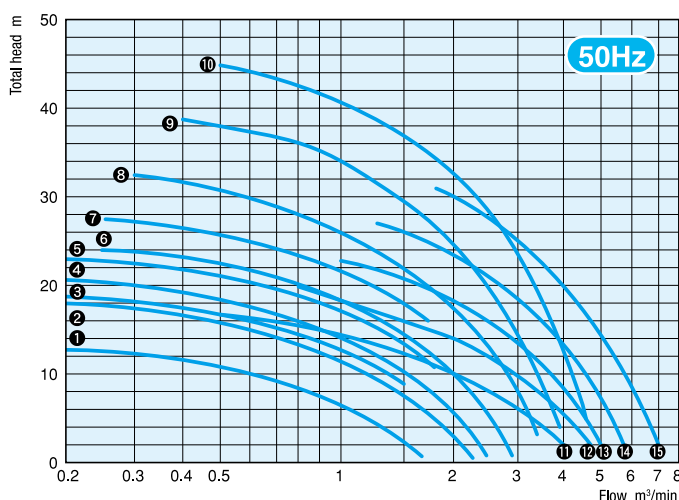

- ① CN80-MT φ65·φ80·φ100-2.2kW
- ② CN80-MT φ65·φ80·φ100-3.7kW [1]
- ③ CN80-MT φ65·φ80·φ100-3.7kW [3]
- ④ CN100-MT φ80·φ100-5.5kW [1]
- ⑤ CN100-MT φ80·φ100-5.5kW [3]
- ⑥ CN100-MT φ80·φ100-7.5kW [1]
- ⑦ CN100-MT φ80·φ100-7.5kW [3]
- ⑧ CNH100 φ100-11kW
- ⑨ CNH100 φ100-15kW
- ⑩ CNH100 φ100-22kW
- ⑪ CN150-MT φ150-5.5kW
- ⑫ CN150-MT φ150-7.5kW
- ⑬ CN150 φ150-11kW
- ⑭ CN150 φ150-15kW
- ⑮ CN150 φ150-22kW

() indicates the impeller number

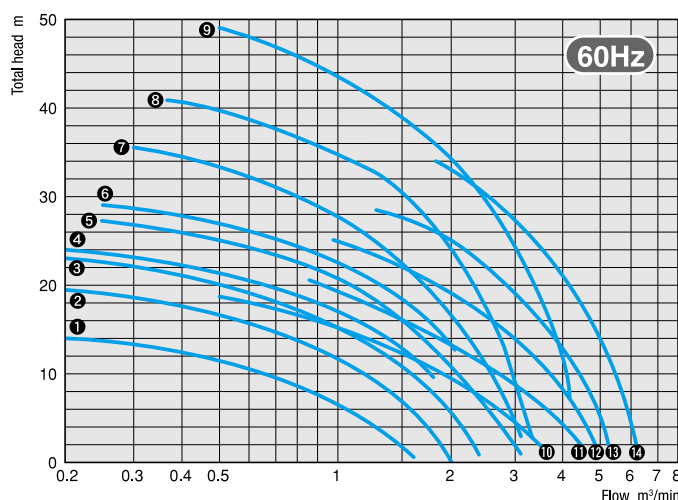

- ① CN80-MT φ65·φ80·φ100-2.2kW
- ② CN80-MT φ65·φ80·φ100-3.7kW
- ③ CN100-MT φ80·φ100-5.5kW [2]
- ④ CN100-MT φ80·φ100-5.5kW [4]
- ⑤ CN100-MT φ80·φ100-7.5kW [2]
- ⑥ CN100-MT φ80·φ100-7.5kW [4]
- ⑦ CNH100 φ100-11kW
- ⑧ CNH100 φ100-15kW
- ⑨ CNH100 φ100-22kW
- ⑩ CN150-MT φ150-5.5kW
- ⑪ CN150-MT φ150-7.5kW
- ⑫ CN150 φ150-11kW
- ⑬ CN150 φ150-15kW
- ⑭ CN150 φ150-22kW

() indicates the impeller number


* For detailed performance and dimensions, please contact your dealer or visit www.shinmaywa.co.jp/pump/english/.

CNMJ-MT




● Solid passage size 80mm with chopper mechanism

1.5 to 7.5kW

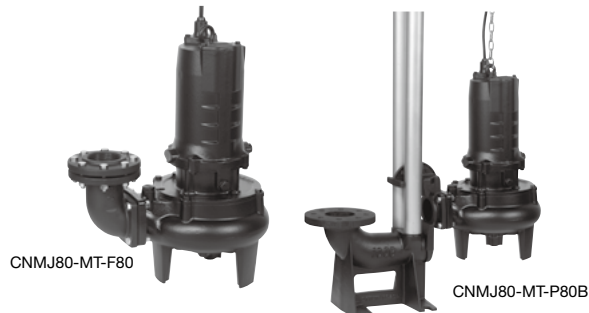


Dimensions (Unit:mm)

● Free standing type



● Guide rail installation type



Standard Specifications

Discharge mm	Pump model	Installation kit No.		Rated output kW	Phase	Flow - Total head m ³ /min-m		No. of poles	Solid passage dia. (mm)		Pump weight kg	
		Guide rail installation	Free standing			50Hz	60Hz		50Hz	60Hz		
80	CNMJ80-MT	P80B	F80	1.5	3	0.8-5.2	—	4	80	80	65	
				2.2		0.9-7.1	0.9-6.8				72	
				3.7		1.1-9.9	1.1-9.6				84	
	CNMJ100-MT			P100B		5.5	1.5-11.6				1.5-11.3	108
						7.5	1.7-13.7				1.7-13.9	119
						1.5	0.8-5.2				—	65
100	CNMJ80-MT	F100	2.2		0.9-7.1	0.9-6.8	72					
			3.7		1.1-9.9	1.1-9.6	84					
			5.5		1.5-11.6	1.5-11.3	108					
	CNMJ100-MT		P100B	7.5	1.7-13.7	1.7-13.9	119					

	Pump model	Installation kit No.	Rated output kW	A	B	C	D	E	F		Pump model	Installation kit No.	Rated output kW	A	B	C	D	E	F
Free standing type	CNMJ80-MT	F80	1.5	607	541	327	260	-	-	Guide rail installation type	CNMJ80-MT	P80B	1.5	619	847	327	270	700	500
		F100		558	-			-	P100B			860		600					
		F80	2.2	619	541			-	-			P80B	2.2	631	847				500
		F100		558	-			-	P100B			860		600					
		F80	3.7	680	541			-	-			P80B	3.7	692	847				500
		F100		558	-			-	P100B			860		600					
	CNMJ100-MT	F80	5.5	712	619	-	-	P80B	5.5		724	926	394	275	600				
		F100		637	-	-	P100B	939											
		F80	7.5	757	619	-	-	P80B	7.5		769	926							
		F100		637	-	-	P100B	939											

* The starting method is direct-on-line. Note: Please inform us of the pump model and installation kit number.



Cable specifications

- CNMJ80-MT: ● 1.5 kW: VCT 1.25 mm² 4 Cores outer dia.φ11.5 mm 8 m ● 2.2 kW: VCT 1.25 mm² 4 Cores outer dia.φ11.5 mm 8 m ● 3.7 kW: VCT 1.25 mm² 4 Cores outer dia.φ11.5 mm 8 m
- CNMJ100-MT: ● 5.5 kW: VCT 2.0 mm² 4 Cores outer dia.φ12 mm 8 m ● 7.5 kW: VCT 3.5 mm² 4 Cores outer dia.φ14 mm 8 m

* Longer cable with 10-30 m (every 5 m) is available as an option.
* VCT: PVC insulated PVC sheathed cable


Performance Curves

● CNMJ80・100-MT

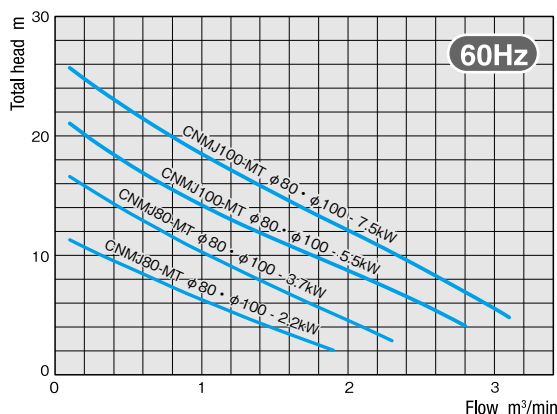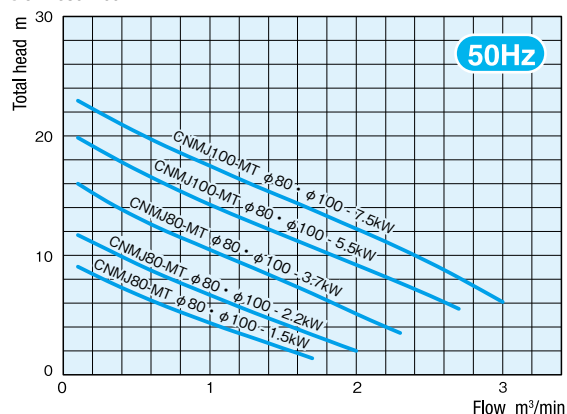

Pass-through test


	Tennis ball φ66	Sanitary items	Plastic bag	Steel can φ53×L105mm	Plastic bottle 500ml
★★★★ = Excellent ★★★ = Very good ★★ = Good ★ = Poor/Normal					
CNWX	★★★★	★★★★	★★★★	★★★★	★★★★
CNMJ-MT	★★★★	★★★★	★★★★	★★★★	★★★★
CN/CJ	★	★★	★★	★	★

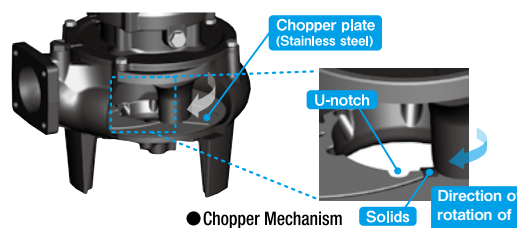

Brand new chopper mechanism using a chopper plate.

CNL

● 4-pole, Chopper Pump

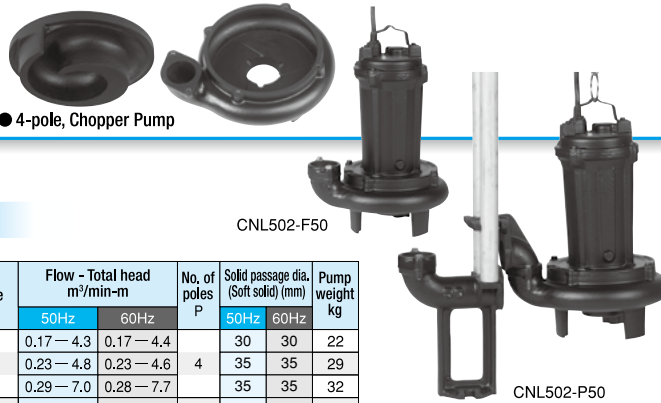

CNL502-F50

CNL502-P50

10.25 to 1.5kW


Standard Specifications

Discharge mm	Pump model	Installation kit No.		Rated output kW	Phase	Flow - Total head m ³ /min-m		No. of poles P	Solid passage dia. (Soft solid) (mm)		Pump weight kg
		Guide rail installation	Free standing			50Hz	60Hz		50Hz	60Hz	
50	CNL502	P50	F50	0.25	3	0.17 – 4.3	0.17 – 4.4	4	30	30	22
				0.4		0.23 – 4.8	0.23 – 4.6		35	35	29
				0.75		0.29 – 7.0	0.28 – 7.7		35	35	32
65	CNL502	P65B	F65B	0.4	3	0.23 – 4.8	0.23 – 4.6	4	35	35	29
				0.75		0.29 – 7.0	0.28 – 7.7		35	35	32
				1.5		0.60 – 7.8	0.56 – 8.1		46	46	50
80	CNL652	P80	F80	1.5	3	0.60 – 7.8	0.56 – 8.1	4	46	46	50



* The starting method is direct-on-line. Note: Please inform us of the pump model and installation kit number.

Dimensions (Unit:mm)

● Free standing type ● Guide rail installation type

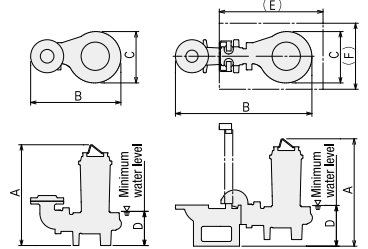

Performance Curves

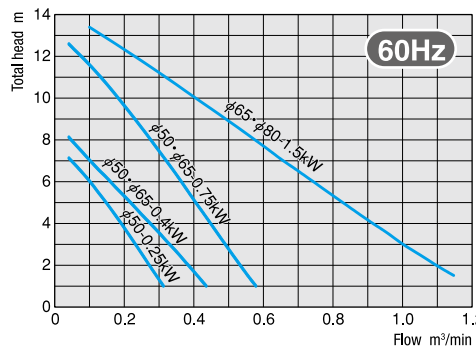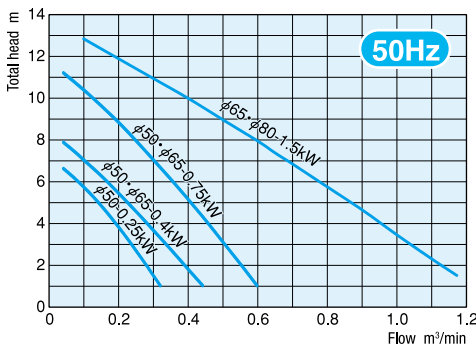


Pump model	Installation kit No.	Rated output kW	A	B	C	D	E	F
Free standing type	CNL502	F50	0.25	381	292	207	120	—
		0.4	449	312	253	140	—	—
		0.75	479	407	—	—	—	—
Guide rail installation type	CNL652	F65B	1.5	535	479	273	180	—
		0.4	494	494	—	—	—	—
		0.75	510	583	253	165	550	350
Free standing type	CNL502	P50	0.25	421	490	207	160	—
		0.4	473	510	253	165	550	350
		0.75	570	724	215	550	350	—
Guide rail installation type	CNL652	P65	1.5	610	800	273	255	600
		0.4	610	800	273	255	600	500
		0.75	610	800	273	255	600	500

Cable specifications

- 0.25~0.75kW: VCT 1.25mm²×4cores outer dia.φ11.5mm 6m
- 1.5kW : VCT 1.25mm²×4cores outer dia.φ11.5mm 8m
- * VCT: PVC insulated PVC sheathed cable

CNT

● Vertical dry pit

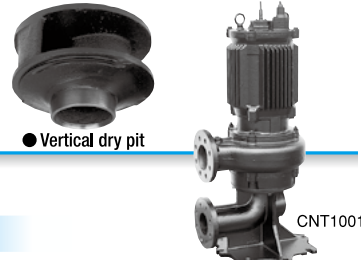

CNT1001

1.5 to 22kW

Standard Specifications


Discharge size mm	Suction size mm	Pump model	Rated output kW		Phase	Flow - Total head m ³ /min-m		No. of poles P	Solid passage dia. (Soft solid) (mm)		Pump weight kg
			50Hz	60Hz		50Hz	60Hz		50Hz	60Hz	
65	80	CNT651	1.5	1.5	3	0.75 — 6.5	0.65 — 7.0	4	56	56	130
80	100	CNT801	2.2	2.2	3	0.90 — 6.7	0.84 — 7.1	4	70	70	205
			3.7	3.7		1.18 — 10.1	1.14 — 9.9		70	70	230
100	125	CNT1001	5.5	5.5	3	1.50 — 11.6	1.49 — 11.6	4	70	70	275
			7.5	7.5		1.79 — 14.0	1.70 — 14.5		70	70	300
	200	CNT1501	11	11		2.5 — 15.0	2.5 — 15.2	4	64	57	550
			15	15		2.9 — 17.0	2.9 — 16.8		70	62	610
			22	22		3.5 — 21.2	3.4 — 22.7		76	67	680
150	150	CNT150B	6	6.5	3	(40) 2.5 — 6.0	(10) 2.8 — 6.8	6	92	92	230
						(30) 2.5 — 7.7	(40) 2.8 — 8.8				
						(20) 2.5 — 11.0	(15) 2.8 — 11.8				
			11	13		(20) 2.5 — 14.8	(20) 2.8 — 14.8	4	90	90	230
						(10) 2.5 — 13.5	(80) 1.8 — 22.8				

* The starting method is direct-on-line for 7.5 kW or less and star-delta for 11 kW and over. () indicates the impeller number.
* Please consult with us for custom production with a discharge size of 200 mm or more.

Dimensions (Unit:mm)

CNT651 to CNT1501

(CNT150B only)

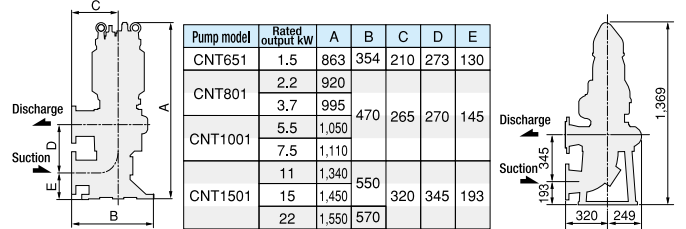

Cable specifications

CNT651 to 1501

For motor

- 1.5~2.2kW: VCT 1.25mm²×4cores outer dia.φ11.5mm 8m
- 3.7kW : VCT 2.0 mm²×4cores outer dia.φ12.0mm 8m
- 5.5kW : VCT 3.5 mm²×4cores outer dia.φ14.0mm 8m
- 7.5kW : VCT 5.5 mm²×4cores outer dia.φ16.5mm 8m
- 11kW: 2PNC 5.5 mm²×4cores outer dia.φ17 mm 8m
- 15kW: 2PNC 5.5 mm²×3cores outer dia.φ15.5mm 8m
- 22kW: 2PNC 8.0 mm²×4cores outer dia.φ18.5mm 8m
- 22kW: 2PNC 8.0 mm²×3cores outer dia.φ17 mm 8m
- 22kW: 2PNC 14 mm²×4cores outer dia.φ22 mm 8m
- 22kW: 2PNC 14 mm²×3cores outer dia.φ20 mm 8m

For protector

2PNC 1.25mm²×2cores outer dia.φ 9.8mm 8m


CNT150B only

2PNC 8.0 mm²×4cores outer dia.φ18.5mm 16m


* VCT: PVC insulated PVC sheathed cable
2PNC: EPR insulated PCP sheathed cable

Performance Curves

● CNT651 to CNT1501 (1.5 to 22kW)

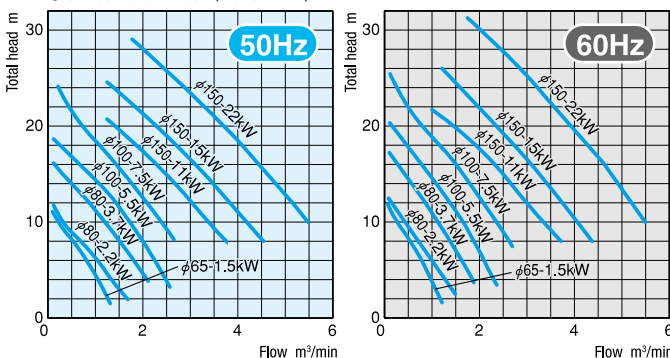


● CNT150B (6 to 13kW)

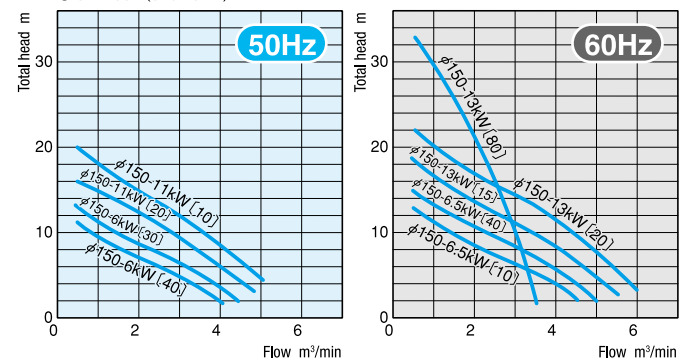

* For detailed performance and dimensions, please contact your dealer or visit www.shinmaywa.co.jp/pump/english/.

() indicates the impeller number.

Chopper pump that prevents clogging

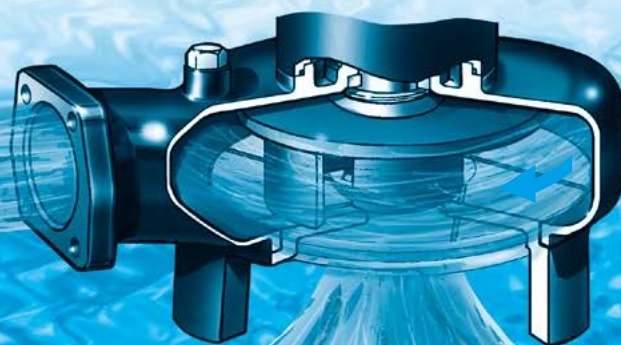


Incorporates a chopper mechanism that cuts solids.
A variety of models are available depending on the installation method and operation method.

CJ



Chopper mechanism
Incorporates a chopper mechanism at the pump suction port to prevent clogging and tangling.



0.75 to 7.5kW



CJ651-F65



CJ651-P65

Standard Specifications



Discharge mm	Pump model	Installation kit No.		Rated output kW	Phase	Flow - Total head m ³ /min-m		No. of poles	Solid passage dia. (Soft solid) (mm)		Pump weight kg	
		Guide rail installation	Free standing			50Hz			60Hz		CJ	CJ-D CJ-W
						(1) 0.2 — 5.1	(2) 0.2 — 6.1		(1) 0.2 — 5.1	(2) 0.2 — 6.1		
50	CJ501	P50	F50	0.75	3	(1) 0.2 — 7.2	(2) 0.2 — 6.1	2	30	29	19.5	—
65	CJ501	P65B	F65B	0.75	3	(1) 0.2 — 7.2	(2) 0.2 — 6.1	2	30	29	19.5	—
	CJ651	P65	F65	(3) 0.15 — 5.1		(4) 0.15 — 4.9	41	33	29	31		
	CJ80			0.4 — 10.2		0.4 — 9.3	54	53	58	—		
				3.7		0.8 — 8.2	0.8 — 8.5	53	54	70	—	
80	CJ651	P80	F80	1.5	3	0.4 — 10.2	0.4 — 9.3	2	41	33	29	31
	CJ80	2.2		0.8 — 8.2		0.8 — 8.5	54	53	58	—		
		3.7		1.0 — 11.7		1.0 — 11.8	53	54	70	—		
		5.5		1.2 — 13.6		1.2 — 13.6	60	53	95	—		
	CJ100	7.5		1.4 — 15.6		1.4 — 17.4	60	108	—	—		
	100	CJ80		P100B		F100	2.2	3	0.8 — 8.2	0.8 — 8.5	4	54
3.7		1.0 — 11.7	1.0 — 11.8		53		54		70	—		
5.5		1.2 — 13.6	1.2 — 13.6		60		53		95	—		
CJ100		7.5	1.4 — 15.6		1.4 — 17.4		60		108	—	—	

* The starting method is direct-on-line. () indicates the impeller number.
Note: Please inform us of the pump model and installation kit number.

Cable specifications


● 0.75kW: VCT 1.25mm²×4cores outer dia.φ11.5mm 6m ● 3.7kW: VCT 2.0mm²×4cores outer dia.φ12m 8m
● 1.5kW: VCT 1.25mm²×4cores outer dia.φ11.5mm 8m ● 5.5kW: VCT 3.5mm²×4cores outer dia.φ14m 8m
● 2.2kW: VCT 1.25mm²×4cores outer dia.φ11.5mm 8m ● 7.5kW: VCT 5.5mm²×4cores outer dia.φ16.5mm 8m
* VCT: PVC insulated PVC sheathed cable

Performance Curves

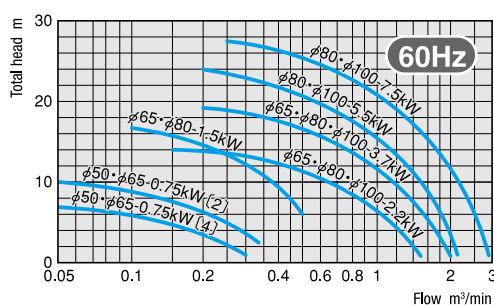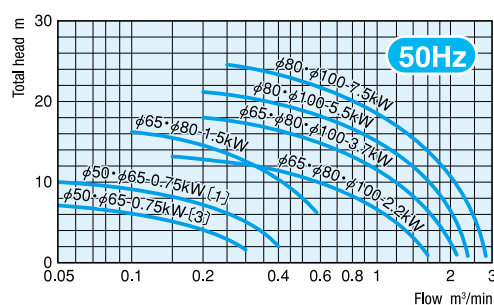

Dimensions (Unit:mm)

● Free standing type ● Guide rail installation type

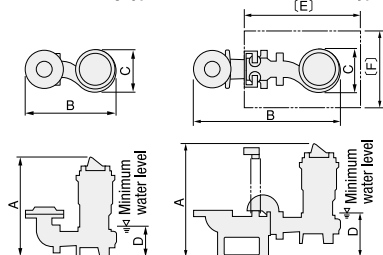

Pump model	Installation kit No.	Rated output kW	A	B	C	D	E	F
Free standing type	CJ501	F50	0.75	414	276	135	—	—
	F65B	1.5	454	418	192	140	—	—
	F65	2.2	550	509	292	—	—	—
	F80	3.7	612	528	331	—	—	—
Guide rail installation type	CJ80	F80	2.2	550	524	292	190	—
	F100	3.7	612	560	331	—	—	—
	F80	5.5	640	601	355	—	—	—
	F100	7.5	675	616	387	190	—	—
Guide rail installation type	CJ501	P50	0.75	460	474	180	550	350
	P65B	1.5	530	663	570	215	550	350
	P80	2.2	580	754	292	220	600	500
	P65	3.7	642	773	331	220	600	500
Guide rail installation type	CJ80	P80B	2.2	620	830	292	600	500
	P100B	3.7	682	849	331	260	700	600
	P80B	5.5	710	907	355	260	700	600
	P100B	7.5	745	922	387	260	700	600


Auto operation <CJ-D>

Auto-alternate operation <CJ-DW>




Pump model		
Auto operation	Auto-alternate operation	
Pair name	Pump No. 1 and 2	
CJ651D	CJ651DW	CJ651W+CJ651D

Free standing type



Guide rail installation type



Pump model	Installation kit No.	Rated output kW	A	B	C	D	E	F
Free standing type	CJ651D	F65	1.5	512	418	224	190	670
	F80	1.5	512	418	224	225	630	710
Guide rail installation type	CJ651W	P65	1.5	588	663	224	265	745
	P80	1.5	628	739	304	305	785	785
Guide rail installation type	CJ651D	P65	1.5	588	663	224	300	705
	P80	1.5	628	739	224	340	745	825

* For detailed performance and dimensions, please contact your dealer or visit www.shinmaywa.co.jp/pump/english/.

Cutter pump with strong cutting force




Able to cut large foreign objects, such as towels and stockings, in wastewater.
This guide rail installation type submersible pump prevents pipe-clogging.

CK



Cutting mechanism

The pump transfers wastewater while cutting foreign objects with a carbide tip mounted to the suction port side of a single-vane channel impeller and a cutter mounted to the suction port.




3.7 to 5.9kW



CK80/100

Dimensions (Unit:mm)



() indicates the P100E.

Standard Specifications



Discharge mm	Pump model	Installation kit No. Guide rail installation	Rated output kW		Phase	Flow - Total head m³/min-m		No. of poles	Solid passage dia. (Soft solid) (mm)		Pump weight kg
			50Hz	60Hz		50Hz	60Hz		50Hz	60Hz	
80	CK80/100	P80F	3.7	4.5	3	(51) 1.00 - 6.5	(61) 0.71 - 5.5	4	58	58	135
						(42) 1.00 - 8.0	(51) 1.12 - 8.5				145
			5.5	5.9		(31) 1.00 - 11.5	(42) 1.12 - 12.0				145
100	CK80/100	P100E	3.7	4.5	3	(51) 1.00 - 6.5	(61) 0.71 - 5.5	4	58	58	135
						(42) 1.00 - 8.0	(51) 1.12 - 8.5				145
			5.5	5.9		(31) 1.00 - 11.5	(42) 1.12 - 12.0				145

* The starting method is direct-on-line. () indicates the impeller number.
Note: Please inform us of the pump model and installation kit number.

Cable specifications

- 3.7/4.5kW: 2PNCT 3.5mm²×4cores outer dia.φ14.5mm 8m
- 5.5/5.9kW: 2PNCT 5.5mm²×4cores outer dia.φ17 mm 8m
- * VCT: PVC insulated PVC sheathed cable

Performance Curves

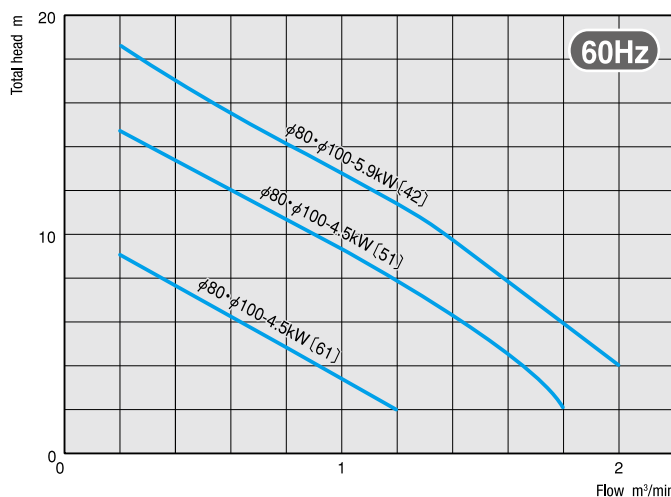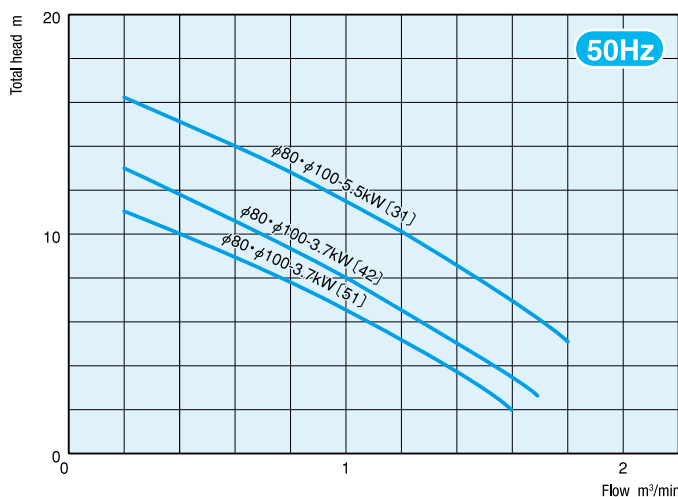


* For detailed performance and dimensions, please contact your dealer or visit www.shinmaywa.co.jp/pump/english/.

Submersible Grinder Pump

Grinder pump capable of grinding solids

This submersible pump can grind foreign objects, such as clothes, rubber products, and plastic bags/sheets in wastewater, and transfers wastewater through narrow pipes over a long distance. Most suitable for a pressure sewage system.

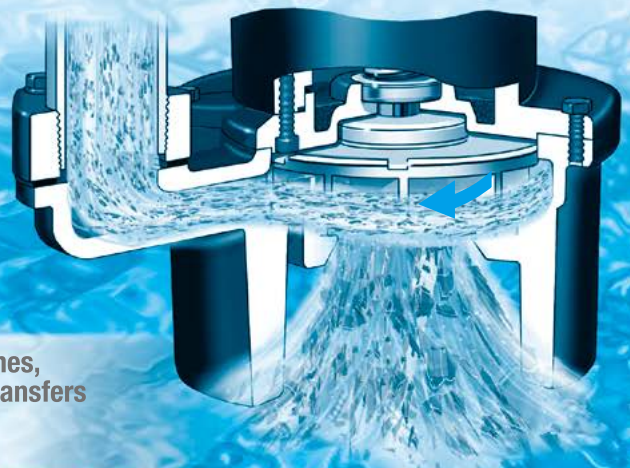



CKM



Grinder pump

The pump grinds solids in wastewater to 5 to 10 mm particles with a strong grinder mechanism and pumps wastewater.

Cutting Example



* The square size is 5x5mm.

0.4 to 3.7kW




CKM40H-F40




CKM40H-P40

Dimensions (Unit:mm)

Free standing type



Guide rail installation type



Standard Specifications

Discharge mm	Pump model	Installation kit No.		Rated output kW	Phase	Flow - Total head m ³ /min-m		No. of poles	Pump weight kg
		Guide rail installation	Free standing			50Hz	60Hz		
32 (40)	CKM32HS (CKM32H)	P32 (P40)	F32 (F40)	1.0	1	0.06 - 13.6	0.06 - 13.6		32
40 (32)	CKM40H	P40 (P32)	F40 (F32)	1.2	3	0.06 - 16.5	0.06 - 17.2	2	28
				1.5		0.06 - 20	0.06 - 20.8		
50 (40)	CKM50H	P50 (P40)	F50 (F40)	2.2		(1)0.12 - 21.2 (2)0.12 - 21.7	(3)0.15 - 16.8 (4)0.15 - 17.0		46
				3.7		0.20 - 26.5	0.20 - 25.3		55
40 (50)	CKM40L	P40 (P50)	F40 (F50)	0.4	3	0.08 - 4.9	0.08 - 4.5	4	28
50 (40)	CKM50L	P50 (P40)	F50 (F40)	0.75		0.10 - 7.3	0.10 - 7.7		28

* A pump with a discharge size within parentheses () is also available. () indicates the impeller number.
* The starting method is direct-on-line except single phase model. Note: Please inform us of the pump model and installation kit number.



Pump model	Installation kit No.	Rated output kW	A	B	C	D	Pump model	Installation kit No.	Rated output kW	A	B	C	D
CKM32HS	F32	1.0	467				CKM32HS	P32	1.0	521			
CKM32H			432	289	185	105	CKM32H			486	487	185	160
CKM40H	F40	1.2 + 1.5					CKM40H	P40	1.2 + 1.5				
CKM40L		0.4	432	299	228	115	CKM40L		0.4	463	498	228	145
CKM50H	F50	2.2	499	310	208	130	CKM50H	P50	2.2	547	588	208	180
		3.7	547	310	210	135			3.7	588	508	210	175
CKM50L		0.75	432	299	228	115	CKM50L		0.75	463	498	228	145

Cable specifications

- 0.4~0.75kW :VCT 1.25mm²×4cores outer dia.φ 11.5mm 6m
- 1.0~2.2kW :VCT 1.25mm²×4cores outer dia.φ 11.5mm 8m
- 3.7kW :VCT 2.0 mm²×4cores outer dia.φ 12 mm 8m

* VCT: PVC insulated PVC sheathed cable

Performance Curves

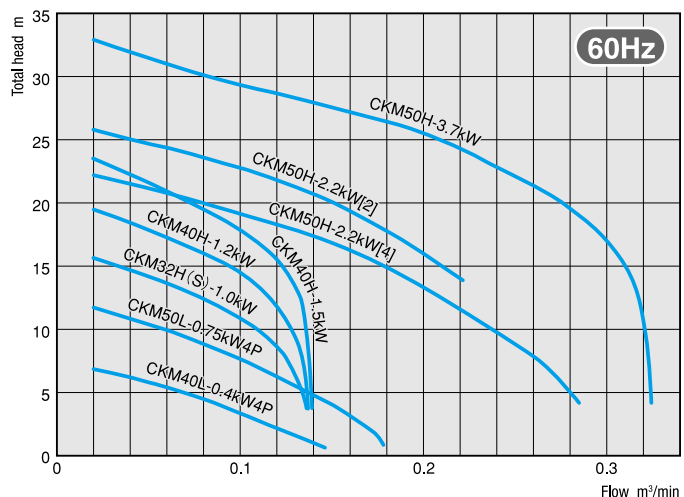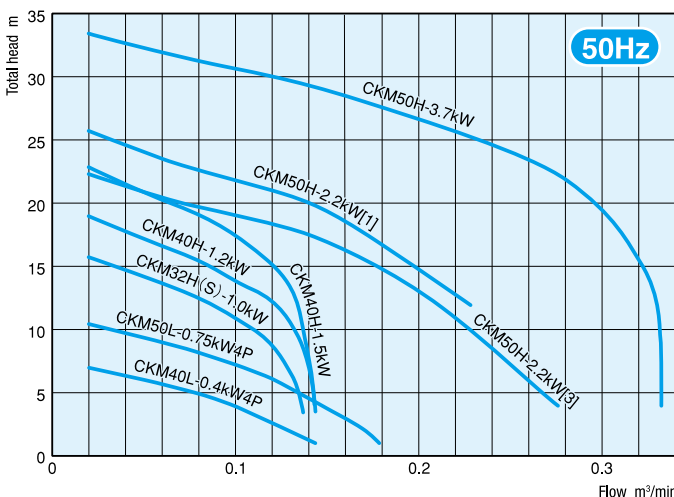

* For detailed performance and dimensions, please contact your dealer or visit www.shinmaywa.co.jp/pump/english/.

() indicates the impeller number.

Vortex impeller



For sewage and wastewater containing a large amount of fibrous material
High solid passage type

**CV-MT
CV**



0.4 to 1.5kW



CV651-F65





CV651-P65

Standard Specifications

Discharge mm	Pump model	Installation kit No.		Rated output kW	Phase	Flow - Total head m ³ /min-m		No. of poles	Solid passage dia. (Soft solid) (mm)		Pump weight kg	
		Guide rail installation	Free standing			50Hz	60Hz		50Hz	60Hz	CV	CV-D CV-W
50	CV501T	P50	F50	0.4	3	0.15 — 5.9	0.15 — 5.9	2	30	30	17	—
	CV501		0.75	0.2 — 8.5		0.2 — 8.5	29		32	18	—	
	CV501-MT		1.5	0.2 — 14.7		0.2 — 15.2	32		31	29	28	
65	CV501T	P65B	F65B	0.4	3	0.15 — 5.9	0.15 — 5.9	2	30	30	17	—
	CV501		0.75	0.2 — 8.5		0.2 — 8.5	29		32	18	—	
	CV501-MT		1.5	0.2 — 14.7		0.2 — 15.2	32		31	29	28	
80	CV651	P65	F65	1.5	3	0.4 — 8.7	0.4 — 8.2	2	42	42	29	31
	CV651	P80	F80	1.5		0.4 — 8.7	0.4 — 8.2		42	42	29	31

* The starting method is direct-on-line. Note: Please inform us of the pump model and installation kit number.


Performance Curves 0.4 to 1.5kW

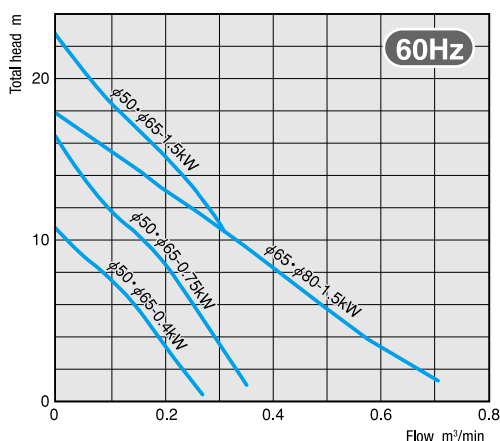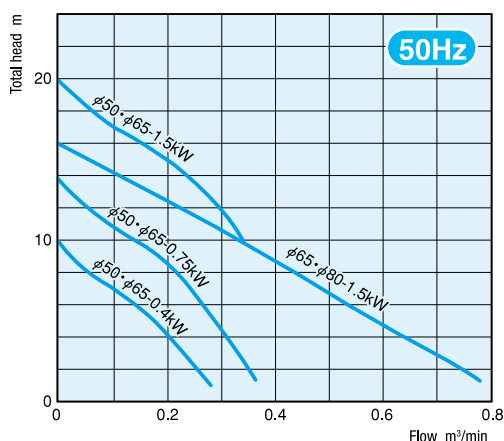

* For detailed performance and dimensions, please contact your dealer or visit www.shinmaywa.co.jp/pump/english/.

Dimensions (Unit:mm)

● Free standing type ● Guide rail installation type



Pump model	Installation kit No.	Rated output kW	A	B	C	D
Free standing type	CV501 (T)	F50	0.4	229	156	135
		F65B	0.75	324	156	135
	CV501-MT	F50	1.5	250	178	150
Guide rail installation type		F65B		345		
	CV651	F65	1.5	474	182	170
		F80		397		
Guide rail installation type	CV501 (T)	P50	0.4	427	156	180
		P65B	0.75	500		
	CV501-MT	P50	1.5	501	178	195
Guide rail installation type		P65B		521		
	CV651	P65	1.5	539	235	275
		P80		579	275	

Cable specifications

- 0.4-0.75kW: VCT 1.25mm²×4cores outer dia. ϕ 11.5mm 6m
- 1.5kW : VCT 1.25mm²×4cores outer dia. ϕ 11.5mm 8m
- * VCT: PVC insulated PVC sheathed cable

Auto operation <CV-D>

Auto-alternate operation <CV-DW>




CV651D-F65


CV651W-F65

Pump model	Auto operation	Auto-alternate operation
CV501D	CV501DW	CV501W+CV501D
CV651D	CV651DW	CV651W+CV651D

● Free standing type



● Guide rail installation type




Pump model	Installation kit No.	Rated output kW	A	B	C	D	E	F
Free standing type	CV501D	F50	1.5	513	250	190	670	—
		F65B		345				
	CV501W	F50	1.5	513	250	225	630	710
Free standing type		F65B		345				
	CV651D	F65	1.5	532	382	215	690	—
		F80		397				
Free standing type	CV651W	F65	1.5	532	382	215	650	730
		F80		397				
Guide rail installation type	CV501D	P50	1.5	559	448	209	715	—
		P65B		521				
	CV501W	P50	1.5	559	448	209	675	755
Guide rail installation type		P65B		521				
	CV651D	P65	1.5	597	627	275	755	—
		P80		637	703	315	795	
Guide rail installation type	CV651W	P65	1.5	597	627	310	715	795
		P80		637	703	350	755	835

Vortex impeller

CV-MT・CV・CVH



5.5 to 22kW



CV150-F150



CV150-P150



Standard Specifications

Discharge mm	Pump model	Installation kit No.	Free standing	Rated output kW	Phase	Flow - Total head m ³ /min-m		No. of poles	Solid passage dia. (Soft solid) (mm)		Pump weight kg
						50Hz	60Hz		50Hz	60Hz	
100	CVH100	P100C	F100B	11	3	0.8 - 23	0.86 - 23	4	36	36	192
				15		0.94 - 26	0.9 - 29				208
				22		1.05 - 34	0.92 - 36				262
				5.5		1.6 - 8.9	1.3 - 8.6		58	58	120
				7.5		1.9 - 9.4	1.6 - 10.5				132
150	CV150	P150	F150	11	3	1.9 - 16	1.67 - 16	4	48	48	185
				15		2.15 - 19	2.05 - 20				197
				22		2.75 - 23	2.15 - 23				256



* The starting method is direct-on-line for 7.5 kW or less and star-delta for 11 kW and over.
Note: Please inform us of the pump model and installation kit number.

Dimensions (Unit:mm)

● Free standing type



● Guide rail installation type





Cable specifications

- 5.5kW: VCT 3.5mm²×4cores outer dia.φ14 mm 8m
- 7.5kW: VCT 5.5mm²×4cores outer dia.φ16 5mm 8m
- 11kW: { 2PNCT 1.25mm² ×2cores outer dia.φ9.8 mm 8m
2PNCT 5.5 mm² ×4cores outer dia.φ17 mm 8m
- 15kW: { 2PNCT 1.25mm² ×2cores outer dia.φ9.8 mm 8m
2PNCT 8.0 mm² ×3cores outer dia.φ17 mm 8m
2PNCT 8.0 mm² ×4cores outer dia.φ18.5mm 8m
- 22kW: { 2PNCT 1.25mm² ×2cores outer dia.φ9.8 mm 8m
2PNCT 14 mm² ×3cores outer dia.φ20 mm 8m
2PNCT 14 mm² ×4cores outer dia.φ22 mm 8m

* VCT: PVC insulated PVC sheathed cable
2PNCT: EPR insulated PCP sheathed cable

	Pump model	Installation kit No.	Rated output kW	A	B	C	D		Pump model	Installation kit No.	Rated output kW	A	B	C	D	E	F
Free standing type	CVH100	F100B	11	782	848	486	255	Guide rail installation type	CVH100	P100C	11	861	1,110	486	335	900	700
			15								15						
			22	876	870	529					22	955	1,132	529			
			5.5	713							5.5	779					
	CV150	F150	7.5	748	836	400	260				7.5	814	1,094	400	325		
			11								11						
			15	804	890	450	280				15	871	1,148	450	345	900	700
			22	901	930	489					22	967	1,188	489			

Performance Curves 5.5 to 22kW

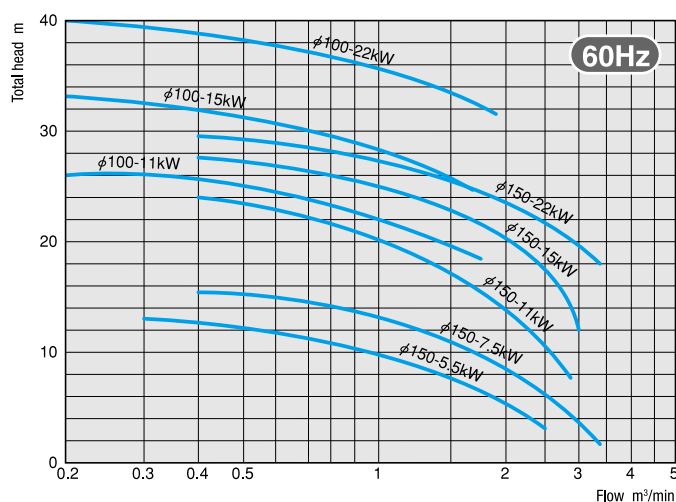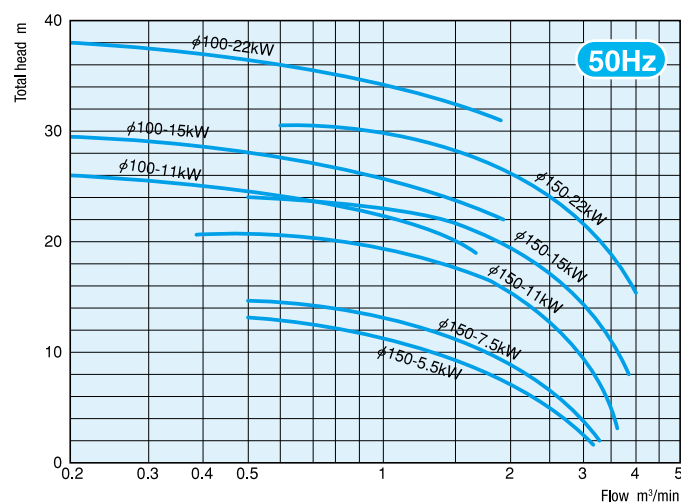



CVS-MT
CVS



● High efficiency/high head

0.25 to 1.5kW



CVS651-F65

CVS651-P65


Standard Specifications

Discharge mm	Pump model	Installation kit No.		Rated output kW	Phase	Flow - Total head m³/min-m		No. of poles	Solid passage dia. (Soft solid) (mm)		Pump weight kg		
		Guide rail installation	Free standing			50Hz	60Hz		50Hz	60Hz	CVS	CVS-D	CVS-W
40	CVS401T-MT	P40	F40	0.25	3	0.13 - 4.4	0.1 - 4.6	2	27	27	17	15	16
50	CVS501T-MT	P50	F50	0.25	3	0.13 - 4.4	0.1 - 4.6	2	27	27	17	16	17
	0.4			0.17 - 5.0		0.12 - 6.8	29		29	17	17	18	
	CVS501-MT			0.75		0.16 - 9.2	0.2 - 8.0		27	27	18	18	19
65	CVS651-MT	P65	F65	1.5	3	0.42 - 9.0	0.38 - 9.0	2	16	16	29	30.5	30.5
80	CVS651-MT	P80	F80	1.5	3	0.42 - 9.0	0.38 - 9.0	2	16	16	29	30.5	30.5


* The starting method is direct-on-line. Note: Please inform us of the pump model and installation kit number.

Dimensions (Unit:mm)

● Free standing type



● Guide rail installation type





Pump model	Installation kit No.	Rated output kW	A	B	C	D	Pump model	Installation kit No.	Rated output kW	A	B	C	D
CVS401T-MT	F40	0.25	399	232	162	115	CVS401T-MT	P40	0.25	457	430	162	175
CVS501T-MT	F50	0.25	399	232	162	115	CVS501T-MT	P50	0.4	457	430	162	175
CVS501-MT	F65	0.75	440	418	192	125	CVS501-MT	P65	0.75	516	663	192	200
CVS651-MT	F80	1.5	440	433	192	125	CVS651-MT	P80	1.5	556	739	192	240

Cable specifications

- 0.25~0.75kW: VCT 1.25mm²×4cores outer dia.φ11.5mm 6m
- 1.5kW: VCT 1.25mm²×4cores outer dia.φ11.5mm 8m

* VCT: PVC insulated PVC sheathed cable

Performance Curves 0.25 to 1.5kW

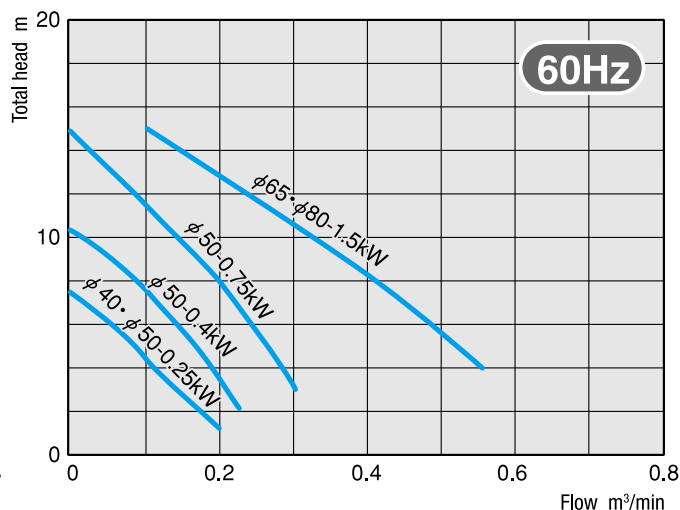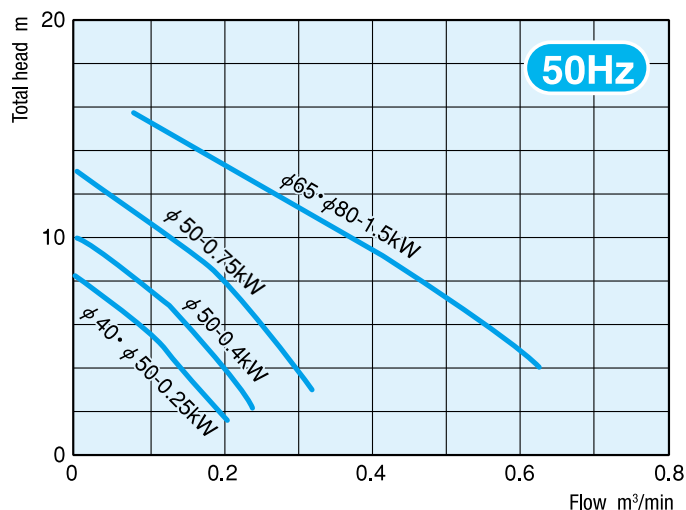

Auto operation <CVS-D>

Auto-alternate operation <CVS-DW>




CVS651D-F65


CVS651W-F65

Pump model		
Auto operation	Auto-alternate operation	
Pair name	Pump No. 1 and 2	
CVS651D	CVS651DW	CVS651W+CVS651D

● Free standing type




● Guide rail installation type




Pump model	Installation kit No.	Rated output kW	A	B	C	D	E	F	Pump model	Installation kit No.	Rated output kW	A	B	C	D	E	F
CVS651D	F65	1.5	498	418	224	175	655	—	CVS651D	P65	1.5	574	663	224	250	730	—
CVS651D	F80	1.5	498	433	224	175	655	—	CVS651D	P80	1.5	614	739	224	290	770	—
CVS651W	F65	1.5	498	418	224	210	615	695	CVS651W	P65	1.5	574	663	224	285	690	770
CVS651W	F80	1.5	498	433	224	210	615	695	CVS651W	P80	1.5	614	739	224	325	730	810

2.2 to 11kW

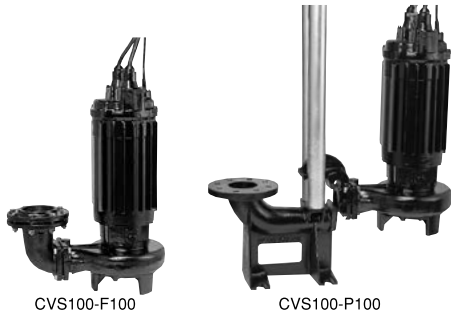


Dimensions (Unit: mm)

● Free standing type



● Guide rail installation type



Standard Specifications

Discharge mm	Pump model	Installation kit No.		Rated output kW	Phase	Flow - Total head m³/min-m		No. of poles	Solid passage dia. (Soft solid) (mm)		Pump weight kg	
		Guide rail installation	Free standing			50Hz	60Hz		50Hz	60Hz		
65	CVS80	P65	F65	2.2	3	0.44 – 11.0	0.42 – 11.0	2	17	17	46	
				3.7		0.51 – 17.0	0.47 – 17.0				55	
80	CVS80	P80	F80	2.2	3	0.44 – 11.0	0.42 – 11.0	2	17	17	46	
				3.7		0.51 – 17.0	0.47 – 17.0				55	
	CVS100			5.5		0.45 – 22.7	0.40 – 23.6				22	92
				7.5		0.55 – 27.2	0.45 – 28.5					
100	CVS80	P100	F100	11	3	0.60 – 33.0	0.60 – 35.6	2	22	22	120	
				3.7		0.51 – 17.0	0.47 – 17.0				55	
	5.5			0.45 – 22.7		0.40 – 23.6	82					
	CVS100			7.5		0.55 – 27.2	0.45 – 28.5				92	
				11		0.60 – 33.0	0.60 – 35.6				120	



* The starting method is direct-on-line for 7.5 kW or less and star-delta for 11 kW.
Note: Please inform us of the pump model and installation kit number.

Pump model	Installation kit No.	Rated output kW	A	B	C	D	Pump model	Installation kit No.	Rated output kW	A	B	C	D	E	F
CVS80	F65	2.2	538	452			CVS80	P65	2.2	581	697			200	
		3.7	579						3.7	622					
	F80	2.2	538	266	160			P80	2.2	621	773	266		550	350
		3.7	579	467					3.7	662			240		
CVS100	F100	3.7	579	484			CVS100	P100	3.7	662	786				
		5.5	616	509	248				5.5	698	803	248			
	F80	7.5	651					P80	7.5	733					
		11	733	529	284	175			11	814	836	284	255	700	600
CVS100	F100	5.5	616	526	248		CVS100	P100	5.5	698	816	248			
		7.5	651	546	284				7.5	733					
	F100	11	733	546	284			P100	11	814	849	284			

Cable specifications

- 2.2kW: VCT 1.25mm²×4cores outer dia.φ11.5mm 8m
 - 3.7kW: VCT 2.0 mm²×4cores outer dia.φ12 mm 8m
 - 5.5kW: VCT 3.5 mm²×4cores outer dia.φ14 mm 8m
 - 7.5kW: VCT 5.5 mm²×4cores outer dia.φ16.5mm 8m
 - 11kW: 2PNCT 1.25mm²×2cores outer dia. φ9.8mm 8m
 - 11kW: 2PNCT 5.5 mm²×3cores outer dia.φ15.5mm 8m
 - 11kW: 2PNCT 5.5 mm²×4cores outer dia.φ17 mm 8m
- * VCT: PVC insulated PVC sheathed cable
2PNCT: EPR insulated PCP sheathed cable

Performance Curves 2.2 to 11kW

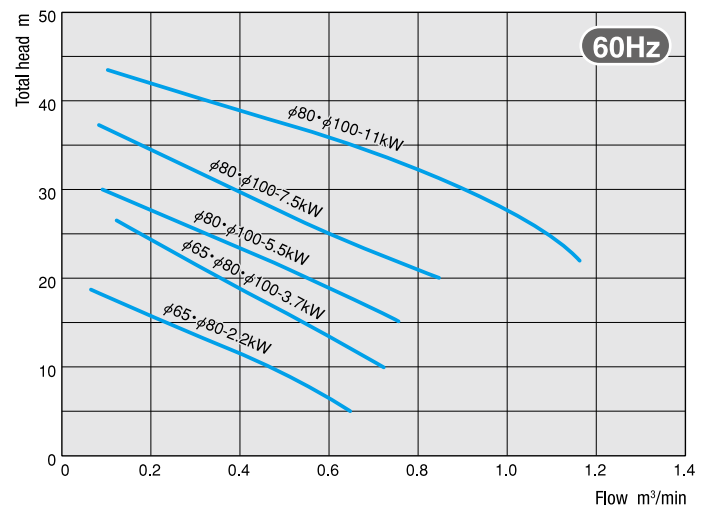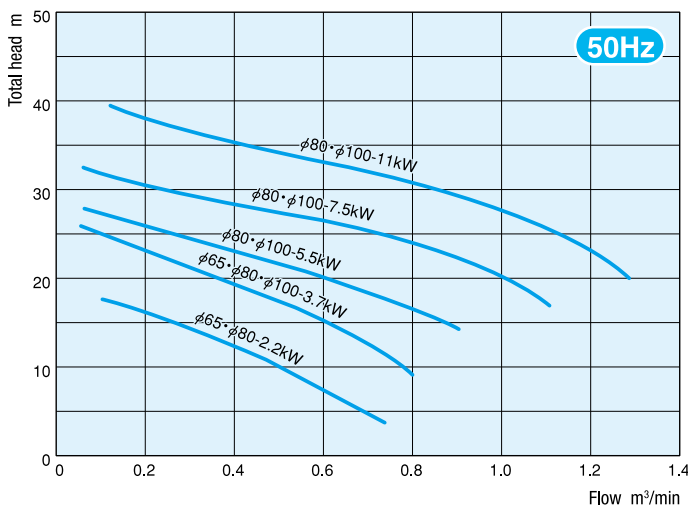

* For detailed performance and dimensions, please contact your dealer or visit www.shinmaywa.co.jp/pump/english/.



CVC-MT CVC

● Solid passage size: 70% of discharge size

0.25 to 7.5kW




CVC1001-F100


CVC1001-P100B

Dimensions (Unit:mm)

● Free standing type



● Guide rail installation type



Standard Specifications

Discharge mm	Pump model	Installation kit No.		Rated output kW	Phase	Flow - Total head m ³ /min-m		No. of poles	Solid passage dia. (Soft solid) (mm)		Pump weight kg		
		Guide rail installation	Free standing			50Hz			60Hz				
						50Hz	60Hz		50Hz	60Hz			
50	CVC501	P50	F50	0.25	3	0.19 - 3.1	0.19 - 3.1	4	35	35	22		
				0.4		0.18 - 4.4	0.18 - 4.6				25		
				0.75		0.23 - 6.5	0.23 - 7.1				28		
65	※CVC501	P65B	F65B	0.4	3	0.18 - 4.4	0.18 - 4.6	4	35	35	25		
	CVC651-MT CVC801 CVC801-MT	P65 (P65G)	F65	0.75		0.23 - 6.5	0.23 - 7.1				28		
				1.5		0.45 - 7.6	0.45 - 8.2				46	46	45
				1.5		0.52 - 7.0	0.52 - 6.7				45		
	2.2	0.6 - 8.9	0.6 - 8.9	56	56	56	60						
	3.7	0.8 - 11.3	0.8 - 11.9				70						
	※CVC651	P80 (P80G)	F80	1.5	3	0.45 - 7.6	0.45 - 8.2	4	46	46	45		
	CVC801-MT CVC801 CVC1001-MT	P80B (P80G)	F80	1.5		0.52 - 7.0	0.52 - 6.7				60		
2.2				0.6 - 8.9		0.6 - 8.9	56				56	45	
3.7				0.8 - 11.3		0.8 - 11.9	70						
5.5	1.2 - 12.2	1.2 - 12.2	70	70	70	98							
7.5	1.3 - 14.8	1.3 - 16.0				107							
100	※CVC801-MT	P100B (P100G)	F100	2.2	3	0.6 - 8.9	0.6 - 8.9	4	56	56	60		
	CVC1001-MT	F100	3.7	0.8 - 11.3		0.8 - 11.9	70						
			5.5	1.2 - 12.2		1.2 - 12.2	98						
			7.5	1.3 - 14.8		1.3 - 16.0	107						

* The starting method is direct-on-line. Note: Please inform us of the pump model and installation kit number.
Note: For models with asterisk *, passable solid size does not meet 70% of discharge size.
() In the installation kit number indicates the special installation kit number for the short type.

Cable specifications

- 0.25~0.75kW: VCT 1.25mm²×4cores outer dia.φ11.5mm 6m
- 1.5kW : VCT 1.25mm²×4cores outer dia.φ11.5mm 8m
- 2.2kW : VCT 1.25mm²×4cores outer dia.φ11.5mm 8m
- 3.7kW : VCT 1.25mm²×4cores outer dia.φ11.5mm 8m
- 5.5kW : VCT 2.0 mm²×4cores outer dia.φ12 mm 8m
- 7.5kW : VCT 3.5 mm²×4cores outer dia.φ14 mm 8m

* VCT: PVC insulated PVC sheathed cable



Pump model	Installation kit No.	Rated output kW	A	B	C	D	Pump model	Installation kit No.	Rated output kW	A	B	C	D	E	F
Free standing type	CVC501	0.25	391	292	204	135	CVC501	P50	0.25	437	490	204	180		
		0.4		299					0.4		497				
		0.75		394					0.75		499				
		0.75			228	150			0.75		570			550	350
	CVC651-MT	F65	526	425	247	175	CVC651-MT	P65	1.5	587	670		235		
		F80	557	448	253	210		P65G	1.5	610	670	247		550	350
		F65	2.2	578	490	297		P80	2.2	627	746		275		
		F65	3.7	639				P80G	3.7	686					
	CVC801	F80	557	463	253	210	CVC801	P65	1.5	592	693	253	245	550	350
		F80	2.2	578				P65G	2.2	614	736	297	250	600	500
		F80	3.7	639				P80	3.7	675					
		F80	5.5	702				P80B	5.5	758	850				
	CVC801-MT	F100	2.2	578		215	CVC801-MT	P100B	2.2	654	825	297	290	600	500
		F100	3.7	639				P100G	3.7	715					
		F100	5.5	702				P80B	5.5	758					
		F100	7.5	747				P80G	7.5	803	790				
Guide rail installation type	CVC501	0.25	391	292	204	135	CVC501	P50	0.25	437	490	204	180		
		0.4		299					0.4		497				
		0.75		394					0.75		499				
		0.75			228	150			0.75		570			550	350
	CVC651-MT	F65	526	425	247	175	CVC651-MT	P65	1.5	587	670		235		
		F80	557	448	253	210		P65G	1.5	610	670	247		550	350
		F65	2.2	578	490	297		P80	2.2	627	746		275		
		F65	3.7	639				P80G	3.7	686					
	CVC801	F80	557	463	253	210	CVC801	P65	1.5	592	693	253	245	550	350
		F80	2.2	578				P65G	2.2	614	736	297	250	600	500
		F80	3.7	639				P80	3.7	675					
		F80	5.5	702				P80B	5.5	758	850				
	CVC801-MT	F100	2.2	578		215	CVC801-MT	P100B	2.2	654	825	297	290	600	500
		F100	3.7	639				P100G	3.7	715					
		F100	5.5	702				P80B	5.5	758					
		F100	7.5	747				P80G	7.5	803	790				

Vortex impeller Solid size: 70% of discharge size

CVC-MT・CVC

Performance Curves

* Pumps with dotted performance curve also available

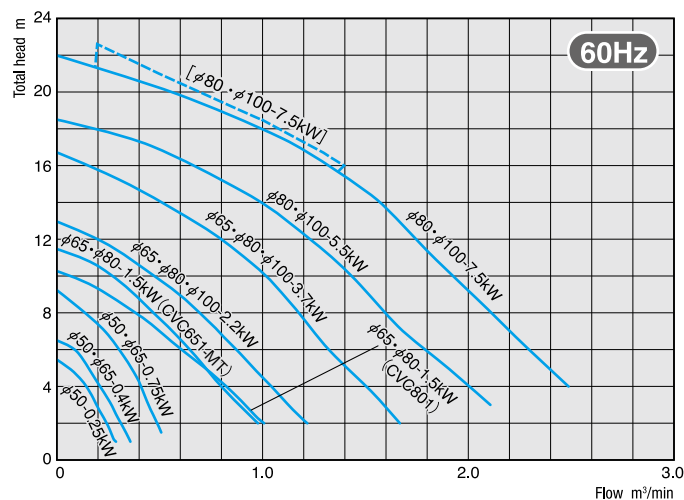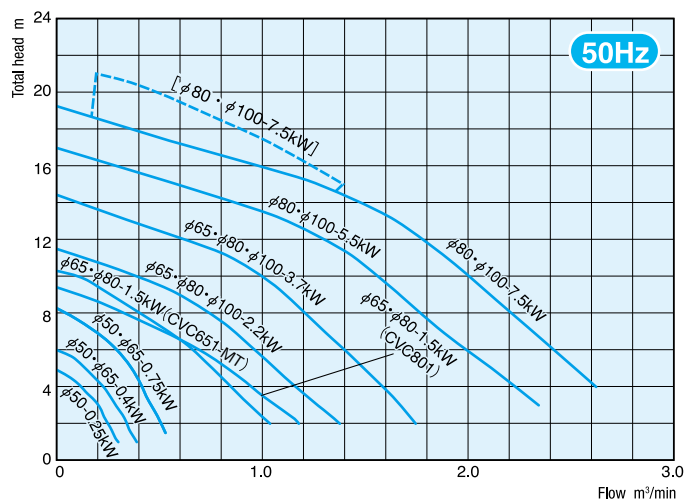

* For detailed performance and dimensions, please contact your dealer or visit www.shinmaywa.co.jp/pump/english/.

CVM



● Solid passage size: 100% of discharge size (except for CVM150)

0.4 to 7.5kW





CVM80-F80





CVM80-P80B

Dimensions (Unit: mm)

● Free standing type



● Guide rail installation type



Standard Specifications

Discharge mm	Pump model	Installation kit No.		Rated output kW	Phase	Flow - Total head m ³ /min-m		No. of poles	Solid passage dia. (Soft solid) (mm)		Pump weight kg
		Guide rail installation	Free standing			50Hz	60Hz		50Hz	60Hz	
50	CVM50	P50	F50	0.4 0.75	3	(1) 0.18 - 3.55 (2) 0.23 - 4.1	(1) 0.17 - 3.3 (2) 0.22 - 5.7	4	50	50	25 26
65	CVM65	P65 (P65G)	F65	1.5 2.2 3.7	3	(1) 0.21 - 6.9 (3) 0.37 - 5.8 (1) 0.28 - 8.8 (3) 0.38 - 7.9 (1) 0.52 - 11.4	(2) 0.20 - 7.5 (4) 0.33 - 6.1 (2) 0.20 - 10.0 (4) 0.34 - 8.4 (2) 0.64 - 10.6	4	65	65	43 55 69
80	CVM80	P80B (P80G)	F80	1.5 2.2 3.7 5.5 7.5	3	(5) 0.2 - 6.5 (7) 0.42 - 4.7 (5) 0.26 - 7.2 (7) 0.45 - 5.9 (1) 0.42 - 11.0 (3) 0.84 - 11.0 (1) 0.47 - 16.4 (3) 0.94 - 14.0	(6) 0.16 - 6.9 (8) 0.40 - 4.9 (4) 0.25 - 7.5 (6) 0.38 - 5.8 (2) 0.46 - 11.2 (4) 0.86 - 10.8 (2) 0.80 - 16.0 (4) 1.00 - 14.4	4	80	80	46 58 72 93 106
100	CVM100	P100C (P100CG)	F100B	3.7 5.5 7.5	3	(5) 0.40 - 9.3 (7) 0.78 - 6.7 (5) 0.62 - 10.8 (7) 1.02 - 8.9 (5) 0.52 - 14.6 (7) 0.96 - 12.0 (7) 0.51 - 7.6	(6) 0.30 - 9.5 (8) 0.72 - 6.2 (4) 0.44 - 12.0 (6) 0.86 - 9.4 (2) 0.80 - 13.2 (4) 1.05 - 11.8 (6) 0.55 - 7.3	4	100	100	73 97 111
150	CVM150	P150	F150	5.5 7.5	3	(9) 0.80 - 6.5 (9) 0.92 - 9.4 (11) 1.32 - 7.6	(10) 0.64 - 6.2 (8) 0.78 - 9.7 (10) 1.04 - 8.1	4	125	125	107 123

* The starting method is direct-on-line. Note: Please inform us of the pump model and installation kit number.
() in the installation kit number indicates the special installation kit number for the short type.
() indicates the impeller number.

	Pump model	Installation kit No.	Rated output kW	A	B	C	D		Pump model	Installation kit No.	Rated output kW	A	B	C	D	E	F	
Free standing type	CVM50	F50	0.4~0.75	486	277	188	170	Guide rail installation type	CVM50	P50	0.4~0.75	506	475	188	195	550	350	
			1.5	572	392	219				1.5	601	637	219	245				
	CVM65	F65	2.2	595	442	238	230			P65	2.2	625	687	238	260			
			3.7	657	451	257				3.7	687	696	257		260			
			1.5	616	452	230	260			P65G	1.5	601	577	219	245	550	350	
	CVM80	F80	2.2	630	462	249	265				2.2	625	627	238	260			
			3.7	692	471	267				3.7	687	636	257					
			5.5	722	523	292	265				1.5	659	758	230	300	550	350	
			7.5	757	534	313				2.2	673	769	249					
	CVM100	F100B	3.7	740	515	280	315			P80B	3.7	735	777	267	310	600	500	
		5.5	778	549	310	325				5.5	765	830	292		700	600		
		7.5	806	571	332	315				7.5	800	841	313					
CVM150	F150	5.5	828	649	304	375			CVM80		1.5	659	698	230	300	550	350	
		7.5	856	663	331	365				2.2	673	709	249					
									P80G	3.7	735	717	267	310	600	500		
										5.5	765	770	292		700	600		
										7.5	800	781	313					
										3.7	803	817	280	375	600	500		
									CVM100	P100C	5.5	841	851	310	385	700	600	
										7.5	869	873	332	380				
									3.7	803	757	280	375	600	500			
									P100CG	5.5	841	791	310	385	700	600		
										7.5	869	813	332	380				
								CVM150	P150	5.5	854	907	304	400	700	600		
										7.5	881	921	331	390				



Cable specifications

Cable specifications

- 0.4-0.75kW: VCT 1.25mm²×4cores outer dia.φ11.5mm 6m
- 1.5kW : VCT 1.25mm²×4cores outer dia.φ11.5mm 8m
- 2.2kW : VCT 1.25mm²×4cores outer dia.φ11.5mm 8m
- 3.7kW : VCT 2.0 mm²×4cores outer dia.φ12 mm 8m
- 5.5kW : VCT 3.5 mm²×4cores outer dia.φ14 mm 8m
- 7.5kW : VCT 5.5 mm²×4cores outer dia.φ16.5mm 8m

* VCT: PVC insulated PVC sheathed cable


Performance Curves

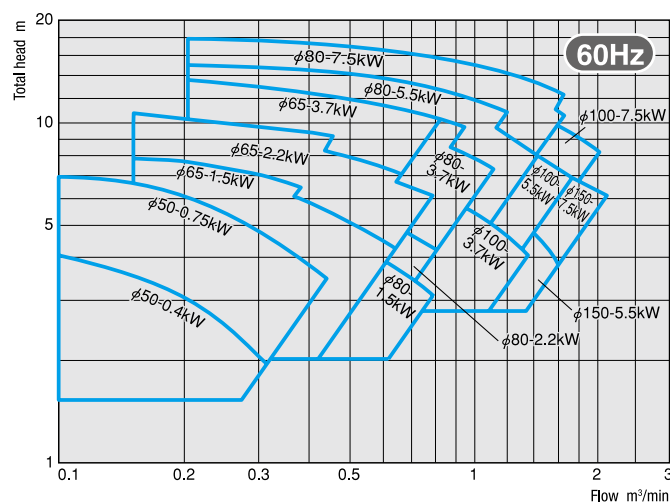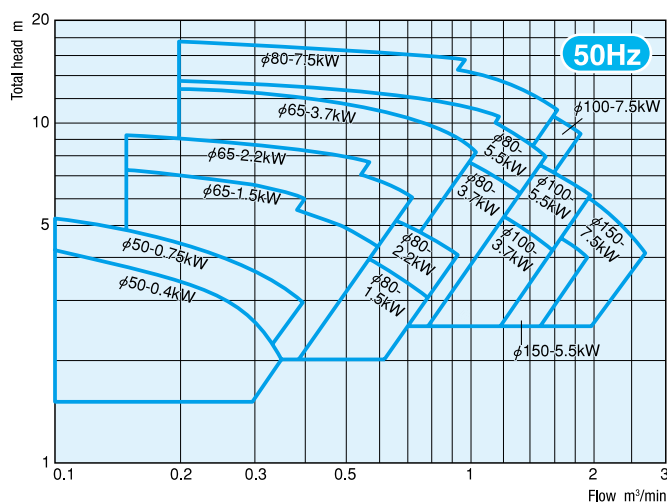

* For detailed performance and dimensions, please contact your dealer or visit www.shinmaywa.co.jp/pump/english/.

Screw impeller

For sewage and wastewater containing uniformly-shaped and fibrous material and for highly concentrated sludge

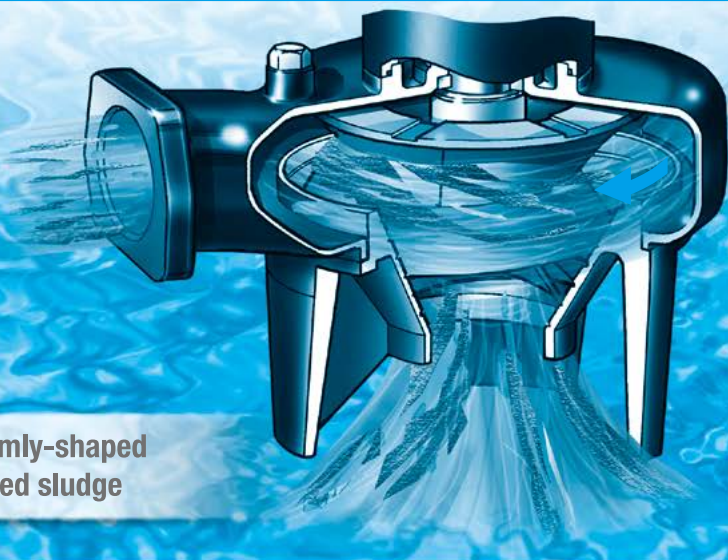

CW·CWH




1.5 to 22kW




CW100-P100B

Dimensions (Unit:mm)

● Free standing type



● Guide rail installation type



Standard Specifications

Discharge mm	Pump model	Installation kit No.		Rated output kW	Phase	Flow - Total head m³/min-m		No. of poles	Solid passage dia. (Soft solid) (mm)		Pump weight kg	
		Guide rail installation	Free standing									
						50Hz	60Hz		50Hz	60Hz		
65	CW65			1.5	3	0.6 — 8.0	0.6 — 8.9	4	43	34	55	
	CW80	P65	F65	1.5		0.7 — 6.8	0.62 — 7.2		43	43	65	
				2.2		0.8 — 8.9	0.8 — 10.5		49	42	70	
				3.7		1.1 — 11.7	1.1 — 11.7		53	48	84	
80	CW65	P80	F80	1.5	3	0.6 — 8.0	0.6 — 8.9	4	43	34	55	
	CW80	P80B	F80	1.5		0.7 — 6.8	0.62 — 7.2			43	65	
				2.2		0.8 — 8.9	0.8 — 10.5			49	42	70
				3.7		1.1 — 11.7	1.1 — 11.7			53		84
				5.5		1.4 — 13.3	1.3 — 15.2			54		115
				7.5		1.7 — 16.9	1.7 — 16.8			56	49	130
				CW100								
	100	CW80	P100B	F100		1.5	0.7 — 6.8		0.62 — 7.2	43	43	65
2.2					0.8 — 8.9	0.8 — 10.5	49	42	70			
CW100		3.7			1.1 — 11.7	1.1 — 11.7	53		84			
		5.5			1.4 — 13.3	1.3 — 15.2	54	48	115			
		7.5			1.7 — 16.9	1.7 — 16.8	56	49	130			
		2.5 — 17.5			2.3 — 19.4	54	51	246				
		CWH100			P100C	F100B	15	2.7 — 20.5	2.5 — 23.0	57	62	260
							22	3.0 — 27.0	3.3 — 27.5	73	65	310
150	CW150	P150	F150	5.5	2.1 — 10.0	2.0 — 10.6	66	58	162			
				7.5	2.6 — 11.3	2.6 — 11.7	81	57	170			
				11	3	3.2 — 12.1	3.2 — 13.4	4	78		245	
						3.6 — 15.6	3.6 — 16.0			76	258	
						4.5 — 18.3	4.5 — 18.2			80		306
						15						
						22						

* The starting method is direct-on-line for 7.5 kW or less and star-delta for 11 kW and over.

Note: Please inform us of the pump model and installation kit number.

* Requiring pumps with discharge size more than 150 mm, please contact to your dealer or ShinMaywa.

Cable specifications


● 1.5kW: VCT 1.25mm ² ×4cores outer dia.φ11.5mm 8m	● 11kW: { 2PNCT 1.25mm ² ×2cores outer dia.φ9.8 mm 8m	● 22kW: { 2PNCT 1.25mm ² ×2cores outer dia.φ9.8mm 8m
● 2.2kW: VCT 1.25mm ² ×4cores outer dia.φ11.5mm 8m	● 11kW: { 2PNCT 5.5 mm ² ×3cores outer dia.φ15.5mm 8m	● 22kW: { 2PNCT 14 mm ² ×3cores outer dia.φ20 mm 8m
● 3.7kW: VCT 2.0 mm ² ×4cores outer dia.φ12 mm 8m	● 11kW: { 2PNCT 5.5 mm ² ×4cores outer dia.φ17 mm 8m	● 22kW: { 2PNCT 14 mm ² ×4cores outer dia.φ22 mm 8m
● 5.5kW: VCT 3.5 mm ² ×4cores outer dia.φ14 mm 8m	● 11kW: { 2PNCT 1.25mm ² ×2cores outer dia.φ9.8 mm 8m	
● 7.5kW: VCT 5.5 mm ² ×4cores outer dia.φ16.5mm 8m	● 15kW: { 2PNCT 8.0 mm ² ×3cores outer dia.φ17 mm 8m	
	● 15kW: { 2PNCT 8.0 mm ² ×4cores outer dia.φ18.5mm 8m	

* VCT: PVC insulated PVC sheathed cable
2PNCT: EPR insulated PCP sheathed cable


* For detailed performance and dimensions, please contact your dealer or visit www.shinmaywa.co.jp/pump/english/.

Performance Curves

CW65•80•100

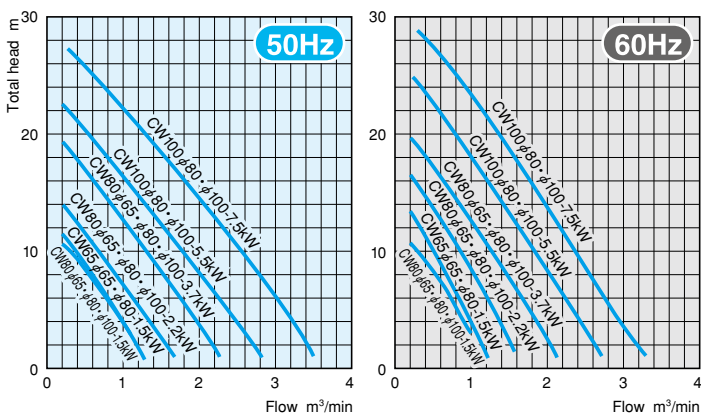

CWH100•CW150

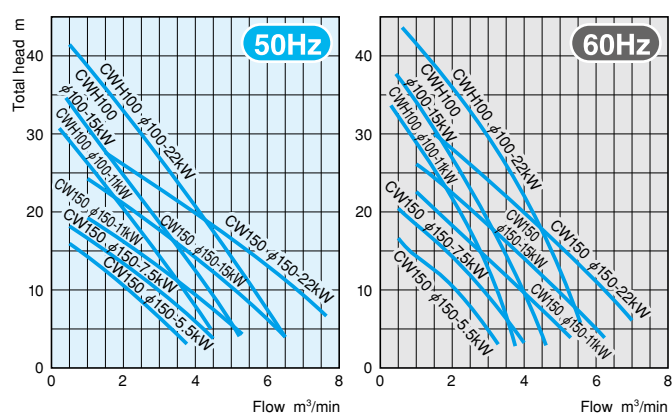

● Vertical dry pit

1.5 to 22kW

Standard Specifications

Discharge mm	Suction mm	Pump model	Rated output kW	Phase	Flow - Total head m³/min-m		No. of poles	Solid passage dia. (Soft solid) (mm)		Pump weight kg
					50Hz	60Hz		50Hz	60Hz	
65	80	CWT65	1.5	3	0.65 - 7.3	0.57 - 8.9	4	43	34	130
			2.2	3	0.79 - 8.3	0.75 - 9.6	4	49	42	205
80	100	CWT80	3.7	3	1.11 - 11.4	1.10 - 11.7	4	53	48	230
			5.5	3	1.40 - 13.4	1.36 - 14.4	4	54	48	275
100	125	CWT100	7.5	3	1.70 - 15.0	1.50 - 17.2	4	56	49	300
			11	3	3.0 - 11.5	2.9 - 12.3	4	78	76	550
150	200	CWT150	15	3	3.7 - 14.0	3.3 - 14.3	4	78	76	610
			22	3	4.0 - 16.9	3.7 - 18.1	4	78	78	680

* The starting method is direct-on-line for 7.5 kW or less and star-delta for 11 kW and over.

Cable specifications


For motor

● 1.5kW: VCT	1.25mm²×4cores	outer dia.φ11.5mm	8m
● 2.2kW: VCT	1.25mm²×4cores	outer dia.φ11.5mm	8m
● 3.7kW: VCT	2.0mm²×4cores	outer dia.φ12mm	8m
● 5.5kW: VCT	3.5mm²×4cores	outer dia.φ14mm	8m
● 7.5kW: VCT	5.5mm²×4cores	outer dia.φ16.5mm	8m
● 11kW: 2PNCT	5.5mm²×3cores	outer dia.φ15.5mm	8m
● 15kW: 2PNCT	8.0mm²×3cores	outer dia.φ17mm	8m
● 15kW: 2PNCT	8.0mm²×4cores	outer dia.φ18.5mm	8m
● 22kW: 2PNCT	14mm²×3cores	outer dia.φ20mm	8m
● 22kW: 2PNCT	14mm²×4cores	outer dia.φ22mm	8m

For protector

2PNCT	1.25mm²×2cores	outer dia.φ9.8mm	8m
* VCT:	PVC insulated PVC sheathed cable		
2PNCT:	EPR insulated PCP sheathed cable		

Dimensions (Unit:mm)



Pump model	Rated output kW	A	B	C	D	E
CWT65	1.5	863	354	210	273	130
CWT80	2.2	920				
	3.7	995				
CWT100	5.5	1,050	470	265	270	145
	7.5	1,110				
CWT150	11	1,340	550			
	15	1,450	320	345	193	
	22	1,550	570			





CWT150

Screw impeller Vertical dry pit type

CWT

Performance Curves

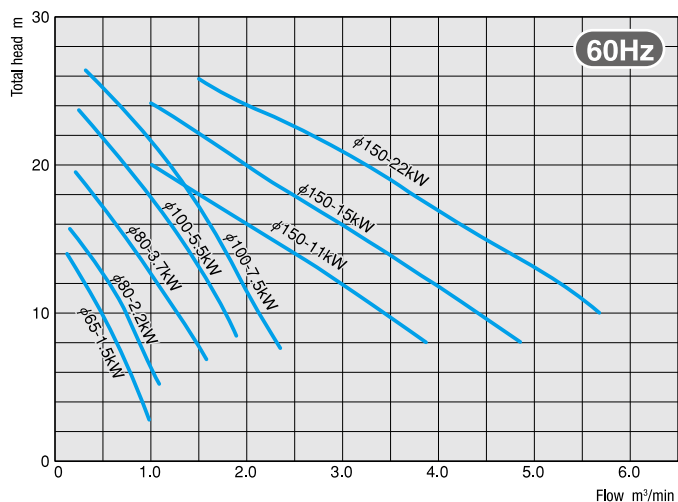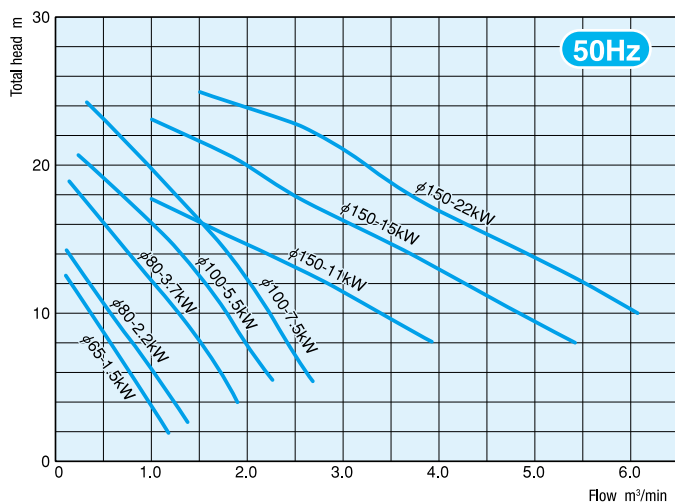


* For detailed performance and dimensions, please contact your dealer or visit www.shinmaywa.co.jp/pump/english/.

Multi-vane semi-open impeller

For fresh water or wastewater containing few suspended solids
Provides high pump efficiency and achieves a high head at low power



A



0.25 to 1.5kW




A652-F65



A652-P65

Dimensions (Unit:mm)

● Free standing type ● Guide rail installation type



Standard Specifications



Discharge mm	Pump model	Installation kit No.		Rated output kW	Phase	Flow - Total head m ³ /min-m		No. of poles	Solid passage dia. (Soft solid) (mm)		Pump weight kg	
		Guide rail installation	Free standing			50Hz			60Hz		A	A—C A—W
						50Hz	60Hz		50Hz	60Hz		
40	A401T	P40	F40	0.25	3	0.1 — 6.5	0.1 — 6.5	2	9	9	14.5	—
50	A501T	P50	F50	0.4	3	0.15 — 7.3	0.15 — 7.3	2	9	9	17	—
	A501		0.75	0.2 — 10.0		0.2 — 10.0	18				—	
65	A501T	P65B	F65B	0.4	3	0.15 — 7.3	0.15 — 7.3	2	9	9	17	—
	A501		0.75	0.2 — 10.0		0.2 — 10.0	18				—	
	A652		P65	F65		1.5	0.4 — 12.3				0.4 — 12.3	14
80	A652	P80	F80	1.5	3	0.4 — 12.3	0.4 — 12.3	2	14	13	27	29

* The starting method is direct-on-line. Note: Please inform us of the pump model and installation kit number.

Cable specifications

- 0.25~0.75kW: VCT 1.25mm²×4 cores outer dia. φ11.5mm 6m
- 1.5kW: VCT 1.25mm²×4 cores outer dia. φ11.5mm 8m
- * VCT: PVC insulated PVC sheathed cable

Performance Curves

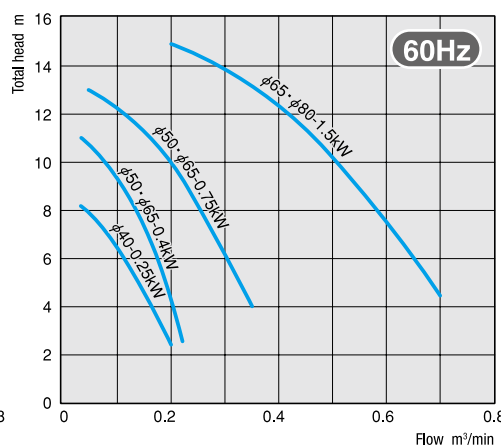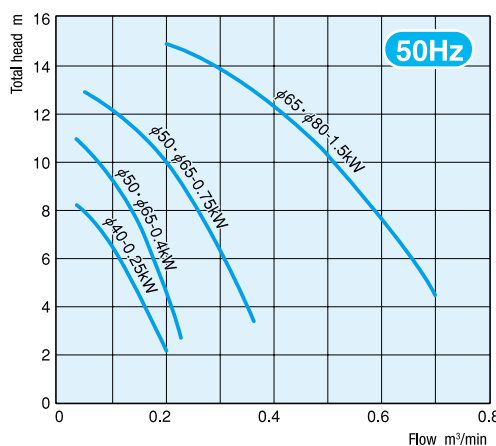

* For detailed performance and dimensions, please contact your dealer or visit www.shinmaywa.co.jp/pump/english/.

Auto operation <A-D>

Auto-alternate operation <A-DW>




A652D-F65


A652W-F65

Pump model		
Auto operation	Auto-alternate operation	
	Pair name	Pump No. 1 and 2
A652D	A652DW	A652W+A652D

● Free standing type



● Guide rail installation type



Pump model	Installation kit No.	Rated output kW	A	B	C	D	E	F
Free standing type	A652D	F65	393	249	171	115	—	—
	F80	1.5	497	344	202	125	—	—
	A652W	F65	393	249	171	115	—	—
Guide rail installation type	A652D	P65	569	431	447	171	180	—
	P80	1.5	609	451	447	171	180	—
	A652W	P65	569	431	447	171	180	—

AH



0.4 to 1.5kW



AH502-F50



AH502-P50


Standard Specifications

Discharge mm	Pump model	Installation kit No.		Rated output kW	Phase	Flow - Total head m ³ /min-m		No. of poles	Solid passage dia. (Soft solid) (mm)		Pump weight kg	AH-D AH-W
		Guide rail installation	Free standing			50Hz	60Hz		50Hz	60Hz		
40	AH401T	P40	F40	0.4	3	0.05 - 13.4	0.05 - 13.2	2	5.5	6.5	17	—
50	AH501	P50	F50	0.75	3	0.1 - 14.0	0.1 - 14.8	2	7.5	9	18	—
	AH502		F50	1.5	3	0.2 - 18.4	0.2 - 18.2		12.5	13.5	25.5	27.5
65	AH501	P65B	F65B	0.75	3	0.1 - 14.0	0.1 - 14.8	2	7.5	9	18	—
	AH502		F65B	1.5	3	0.2 - 18.4	0.2 - 18.2		12.5	13.5	25.5	27.5

* The starting method is direct-on-line. Note: Please inform us of the pump model and installation kit number.

Dimensions (Unit: mm)

● Free standing type ● Guide rail installation type



Pump model	Installation kit No.	Rated output kW	A B C D			
			A	B	C	D
Free standing type	AH401T	F40	0.4	387	249	171
	AH501	F50	0.75	387	249	171
	AH502	F50	1.5	436	278	190
Guide rail installation type	AH401T	P40	0.4	451	447	171
	AH501	P50	0.75	451	447	171
	AH502	P50	1.5	481	476	190

Cable specifications

- 0.4-0.75kW: VCT 1.25mm²×4cores outer dia.φ11.5mm 6m
- 1.5kW : VCT 1.25mm²×4cores outer dia.φ11.5mm 8m
- * VCT: PVC insulated PVC sheathed cable

Auto operation <AH-D>

Auto-alternate operation <AH-DW>




AH502D-F50




AH502W-F50

Pump model		
Auto operation	Auto-alternate operation	
Pair name	Pump No. 1 and 2	
AH502D	AH502DW	AH502W+AH502D

● Free standing type



● Guide rail installation type



Pump model	Installation kit No.	Rated output kW	A B C D E F						
			A	B	C	D	E	F	
Free standing type	AH502D	F50	1.5	494	278	222	170	650	—
	AH502W	F50	1.5	494	278	222	205	610	690
	AH502D	F65B	1.5	539	314	222	215	695	—
Guide rail installation type	AH502D	P50	1.5	539	314	222	215	695	—
	AH502W	P50	1.5	539	314	222	250	655	735
	AH502W	P65B	1.5	539	314	222	250	655	735

Cable specifications

- 2.2kW: VCT 1.25mm²×4cores outer dia.φ11.5mm 8m
- 3.7kW: VCT 2.0mm²×4cores outer dia. φ12mm 8m
- 5.5kW: VCT 3.5mm²×4cores outer dia. φ14mm 8m
- 7.5kW: VCT 5.5mm²×4cores outer dia.φ16.5mm 8m
- 11kW: 2PNCT 1.25mm²×2cores outer dia. φ9.8mm 8m
- 11kW: 2PNCT 5.5mm²×3cores outer dia.φ15.5mm 8m
- 11kW: 2PNCT 5.5mm²×4cores outer dia. φ17mm 8m

* VCT: PVC insulated PVC sheathed cable
2PNCT: EPR insulated PCP sheathed cable

2.2 to 11kW



AH1001-F100



AH1001-P100


Standard Specifications

Discharge mm	Pump model	Installation kit No.		Rated output kW	Phase	Flow - Total head m ³ /min-m		No. of poles	Solid passage dia. (Soft solid) (mm)		Pump weight kg
		Guide rail installation	Free standing			50Hz	60Hz		50Hz	60Hz	
65	AH651	P65	F65	2.2	3	0.3 - 20.3	0.3 - 20.3	2	10.5	12.5	46
	AH801		F65	3.7	3	0.5 - 23.2	0.5 - 24.5		13.5	14	55
	AH651		F65	2.2	3	0.3 - 20.3	0.3 - 20.3		10.5	12.5	46
	AH801		F65	3.7	3	0.5 - 23.2	0.5 - 24.5		13.5	14	55
80	AH1001	P80	F80	5.5	3	0.6 - 28.0	0.6 - 28.6	2	14	14	82
	AH1001		F80	7.5	3	0.8 - 29.5	0.8 - 31.0		14	14	92
	AH1001		F80	11	3	1.0 - 37.4	1.0 - 38.8		14	14	120
	AH1001		F80	3.7	3	0.5 - 23.2	0.5 - 24.5		13.5	14	55
100	AH1001	P100	F100	5.5	3	0.6 - 28.0	0.6 - 28.6	2	14	14	82
	AH1001		F100	7.5	3	0.8 - 29.5	0.8 - 31.0		14	14	92
	AH1001		F100	11	3	1.0 - 37.4	1.0 - 38.8		14	14	120
	AH1001		F100	11	3	1.0 - 37.4	1.0 - 38.8		14	14	120

* The starting method is direct-on-line for 7.5 kW or less and star-delta for 11 kW.
Note: Please inform us of the pump model and installation kit number.



Dimensions (Unit: mm)

● Free standing type ● Guide rail installation type




Pump model	Installation kit No.	Rated output kW	A B C D E F						
			A	B	C	D	E	F	
Free standing type	AH651	F65	2.2	530	450	211	150	—	—
	AH801	F80	3.7	571	465	226	150	—	—
	AH1001	F100	5.5	618	482	—	—	—	—
Guide rail installation type	AH651	P65	2.2	580	465	211	150	—	—
	AH801	P80	3.7	621	495	226	150	—	—
	AH1001	P100	5.5	661	534	240	150	—	—

Performance Curves

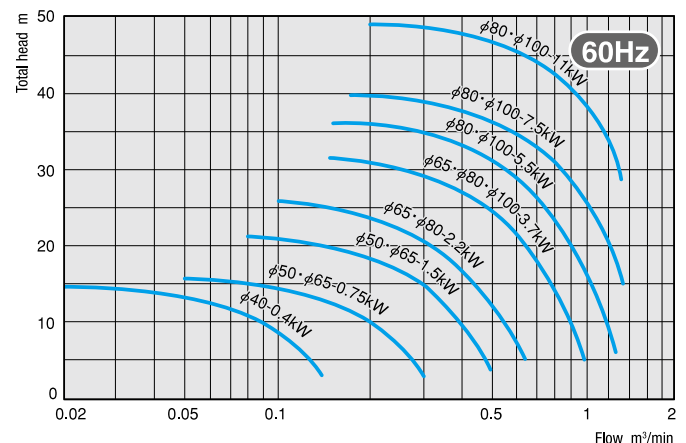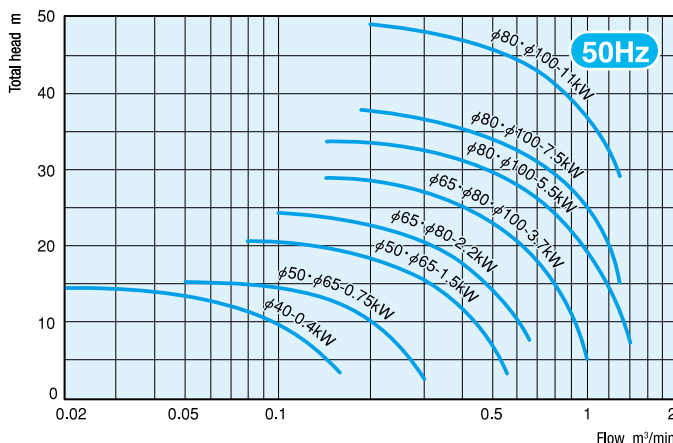

* For detailed performance and dimensions, please contact your dealer or visit www.shinmaywa.co.jp/pump/english/.

Stainless steel submersible pump

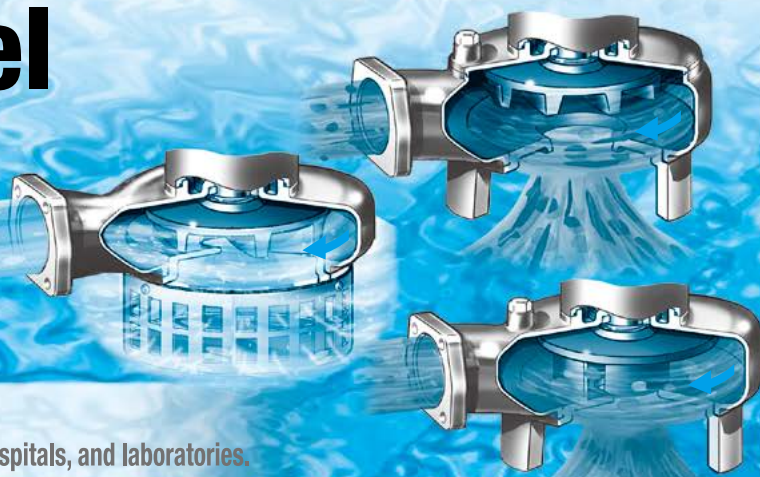

The pump uses stainless steel in all wetted parts.
Suitable for discharging wastewater from food plants, hospitals, and laboratories.

Corrosion Resistance Classification Table

Chemicals	Chemical symbol	Concentration % (Wt)	Temperature (32°C or less)		Remarks
			304 stainless steel	316 stainless steel	
Ammonia	NH ₃	Compressed gas and solution	●	●	
Ethylene glycol	C ₂ H ₆ O ₂	Solution or vapor	●	●	
Ammonium chloride	NH ₄ Cl	≤5	▲	●	Note 2 Note 3
		5 to 20	▲	●	
		20 to 50	▲	●	
		Saturation	▲	●	
Calcium chloride	CaCl ₂	5	▲	●	Note 2 Note 3
		Saturation	▲	●	
Sodium chloride	NaCl	5	●	●	Note 2 Note 3
		Saturation	▲	●	
Magnesium chloride	MgCl ₂ ·6H ₂ O	5	●	●	Note 2 Note 3
		Saturation	▲	●	
Formic acid	H·COOH	1	●	●	Note 1
		5	●	●	
		10	●	●	
		50	▲	●	
Citric acid	C ₆ H ₈ O ₇ ·H ₂ O	≤15	●	●	
		15<	●	●	
Oxalic acid	(COOH) ₂ ·2H ₂ O	≤10	●	●	Note 1
		10<	▲	●	
Tartaric acid	[CH(OH)CO ₂ H] ₂	1	●	●	
		10	●	●	
		10<	●	●	
Carbonic acid	H ₂ CO ₃	Humid gas or water solution	●	●	
Lactic acid	CH ₃ ·CH(OH)·COOH	5	●	●	
		10	●	●	
		20	●	●	
		50	●	●	
		100	●	●	
Picric acid	C ₆ H ₂ (OH)(NO ₂) ₃	High	●	●	
Boric acid	H ₃ BO ₃	≤50	●	●	
		50<	●	●	
Hydrogen sulfide	H ₂ S	Humid gas or water solution	▲	●	
Phosphoric acid	H ₃ PO ₄	≤5	●	●	Note 1
		5 to 25	▲	●	
		25 to 50	—	●	

● Corrosion at 0.1 mm/year or less. ▲ Corrosion at 0.1 - 1.0 mm/year.

Note 1. Be alert to the risk of intergranular corrosion.

Note 2. Be alert to the risk of pitting corrosion.

Note 3. Be alert to the risk of stress corrosion cracking.

*Pumps made of 316 stainless steel are also available as an option

High efficiency

Multi-vane semi-open impeller

S3A



S3A50-S3P50

Smooth solid handling

Channel impeller

S3N



S3N50-S3P50

Large passage area, prevent tangling

Vortex impeller

S3V



S3V50-S3P50


S3A



Transferring or discharging
wastewater containing a relatively
small amount of suspended solids



0.25 to 1.5kW

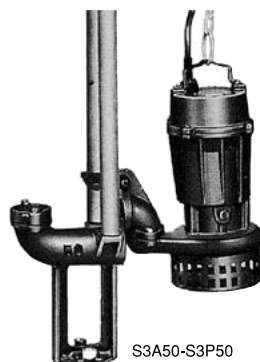

S3A50-S3P50

Standard Specifications

Discharge mm	Pump model	Installation kit No.		Rated output kW	Phase	Flow - Total head m ³ /min-m		No. of poles	Solid passage dia. (Soft solid) (mm)		Pump weight kg	
		Guide rail installation	Free standing			50Hz	60Hz		50Hz	60Hz	S3A	S3A-D S3A-W
40	S3A40T	S3P40	S3F40	0.25	3	0.1 - 6.2	0.1 - 6.1	2	9	9	16.5	17.5
	S3A50T			0.4		0.05 - 12.0	0.05 - 11.9		5.5	6.5	19	20
50 (65)	S3A50	S3P50	S3F50	0.75	3	(3) 0.2 - 9.3	(4) 0.2 - 9.2	2	9	9	20	21
				1.5		(5H) 0.1 - 13.6	(6H) 0.1 - 13.6		11.5	11.5	37	39
65 (80)	S3A65	S3P65	S3F65	1.5	3	(7H) 0.2 - 17.3	(8H) 0.2 - 16.9	2	14	13	38	40

* A pump with a discharge size within parentheses () is also available. () indicates the impeller number.

* The starting method is direct-on-line.

Note: Please inform us of the pump model and installation kit number.

Cable specifications


● 0.25~0.75kW : VCT 1.25mm²×4cores outer dia.φ11.5mm 6m

● 1.5kW : VCT 1.25mm²×4cores outer dia.φ11.5mm 10m

* VCT: PVC insulated PVC sheathed cable

Dimensions (Unit: mm)


● Free standing type ● Guide rail installation type




Auto operation <S3A-D> Auto-alternate operation <S3A-DW>

Pump model		
Auto operation	Auto-alternate operation	
Pair name	Pump No. 1 and 2	
S3A40DT	S3A40DWT	S3A40WT+S3A40DT
S3A50DT	S3A50DWT	S3A50WT+S3A50DT
S3A50D	S3A50DW	S3A50W+S3A50D
S3A65D	S3A65DW	S3A65W+S3A65D

● Free standing type





● Guide rail installation type



	Pump model	Installation kit No.	Rated output kW	A	B	C	D
Free standing type	S3A40T	S3F40	0.25	367	249	171	115
			0.4	387			
	S3A50 (T)	S3F50	0.4~0.75	387	249	171	115
	S3A50		1.5	482	278	190	135
Free standing type	S3A65	S3F65	1.5	484	393	202	135
			0.25	431			
	S3A40T	S3P40	0.4	451	447	171	180
	S3A50 (T)	S3P50	0.4~0.75	451	447	171	180
Guide rail installation type	S3A50		1.5	527	476	190	180
	S3A65	S3P65	1.5	556	638	202	210

	Pump model	Installation kit No.	Rated output kW	A	B	C	D	E	F
Free standing type	S3A40DT	S3F40	0.25	401	249	171	120	540	
			0.4	421				560	
	S3A50D (T)	S3F50	0.4~0.75	421	249	171	120	560	
	S3A50D		1.5	540	278	190	220	690	
Free standing type	S3A65D	S3F65	1.5	542	393	202	220	690	
			0.25	401	249	171	160	490	640
	S3A40WT	S3F40	0.4	421				510	660
	S3A50W (T)	S3F50	0.4~0.75	421	249	171	160	510	660
Free standing type	S3A50W		1.5	540	278	190	280	640	820
	S3A65W	S3F65	1.5	542	393	202	280	640	820
Guide rail installation type	S3A40DT	S3P40	0.25	467	447	171	185	605	
			0.4	487				625	
	S3A50D (T)	S3P50	0.4~0.75	487	447	171	185	625	
	S3A50D		1.5	587	476	190	265	735	
Guide rail installation type	S3A65D	S3P65	1.5	614	638	202	290	760	
			0.25	467	447	171	225	555	705
	S3A40WT	S3P40	0.4	487				575	725
	S3A50W (T)	S3P50	0.4~0.75	487	447	171	225	575	725
Guide rail installation type	S3A50W		1.5	587	476	190	325	685	865
	S3A65W	S3P65	1.5	614	638	202	350	710	890

Performance Curves

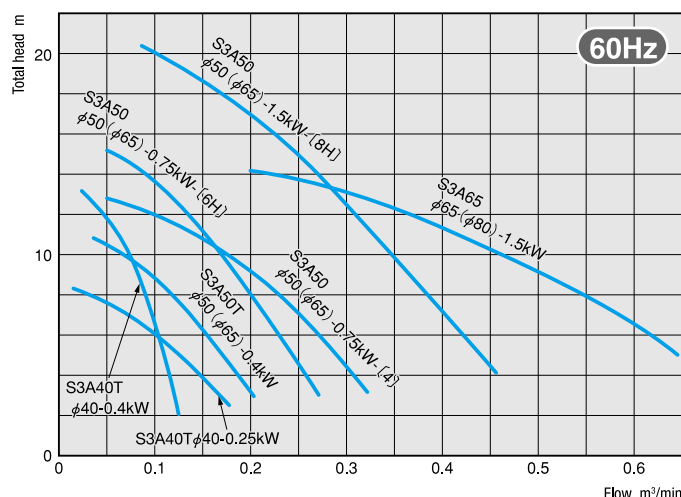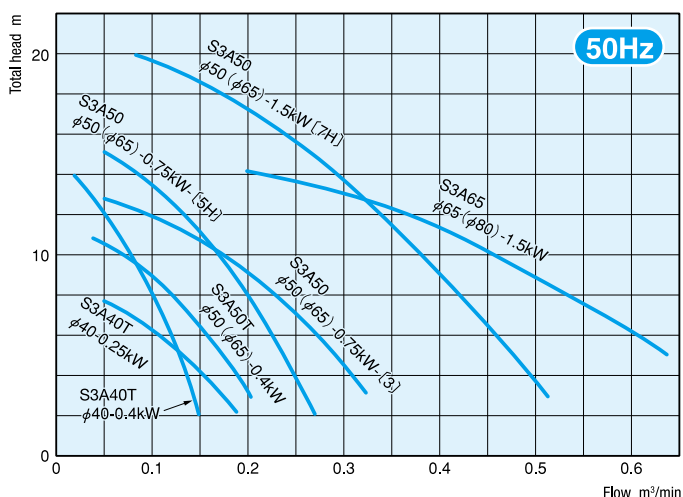

() indicates the impeller number.


* For detailed performance and dimensions, please contact your dealer or visit www.shinmaywa.co.jp/pump/english/.

S3N



Transferring or discharging sewage and wastewater containing a large amount of uniformly shaped solids


0.25 to 7.5kW

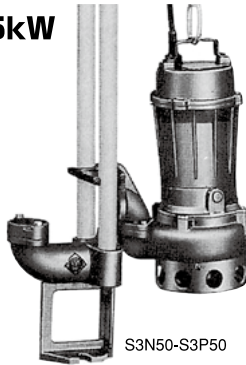

S3N50-S3P50

Dimensions (Unit:mm)

● Free standing type ● Guide rail installation type

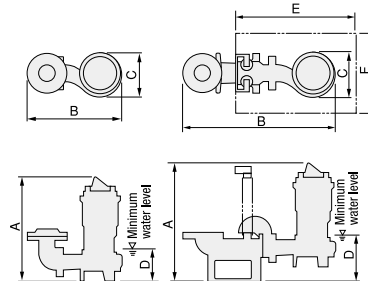


Auto operation <S3N-D>


Auto-alternate operation <S3N-DW>

Pump model		
Auto operation	Auto-alternate operation	
Pair name	Pump No. 1 and 2	
S3N40DT	S3N40DWT	S3N40WT+S3N40DT
S3N50DT	S3N50DWT	S3N50WT+S3N50DT
S3N50D	S3N50DW	S3N50W+S3N50D
S3N65D	S3N65DW	S3N65W+S3N65D

● Free standing type



● Guide rail installation type



Standard Specifications

Discharge mm	Pump model	Installation kit No.		Rated output kW	Phase	Flow - Total head m ³ /min-m		No. of poles	Solid passage dia. (Soft solid) (mm)		Pump weight kg	
		Guide rail installation	Free standing			50Hz	60Hz		50Hz	60Hz	S3N	S3N-D S3N-W
40	S3N40T	S3P40	S3F40	0.25	3	0.1 - 5.1	0.1 - 5.0	2	21	20	17.5	18.5
50	S3N50T	S3P50	S3F50	0.4	3	0.15 - 5.6	0.15 - 5.6	2	28	23	23	24
50 (65)	S3N50	S3P50	S3F50	0.75	3	0.2 - 7.6	0.2 - 7.0	2	30	30	24	25
65 (80)	S3N65	S3P65	S3F65	1.5	3	0.4 - 9.9	0.4 - 9.2	2	39	34	39	41
80	S3N80	S3P80B	S3F80	2.2	3	0.8 - 7.4	0.8 - 7.6	4	52	51	63	-
80 (65) (100)	S3N80	S3P80B	S3F80	3.7	3	(1) 1.0 - 10.8 (3) 0.8 - 13.4	1.0 - 10.8	4	51	52	76	-
100	S3N100	S3P100B	S3F100	5.5	3	(1) 1.2 - 11.5 (3) 0.9 - 16.5	(2) 1.2 - 12.2 (4) 0.9 - 16.5	4	58	52	103	-
100 (80)	S3N100	S3P100B	S3F100	7.5	3	(1) 1.4 - 14.0 (3) 1.0 - 20.0	(2) 1.4 - 15.4 (4) 1.0 - 21.0	4	65	58	117	-

* A pump with a discharge size within parentheses () is also available. () indicates the impeller number.

* The starting method is direct-on-line.





Note: Please inform us of the pump model and installation kit number.

Cable specifications

- 0.25~0.75kW : VCT 1.25mm²×4cores outer dia.φ11.5mm 6m
- 1.5kW : VCT 1.25mm²×4cores outer dia.φ11.5mm 10m
- 2.2kW : VCT 1.25mm²×4cores outer dia.φ11.5mm 8m
- 3.7kW : VCT 2.0mm²×4cores outer dia.φ12 mm 8m
- 5.5kW : VCT 3.5mm²×4cores outer dia.φ14 mm 8m
- 7.5kW : VCT 5.5mm²×4cores outer dia.φ16.5mm 8m

* VCT: PVC insulated PVC sheathed cable

Performance Curves

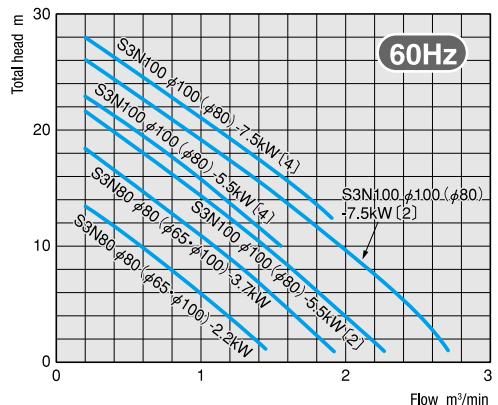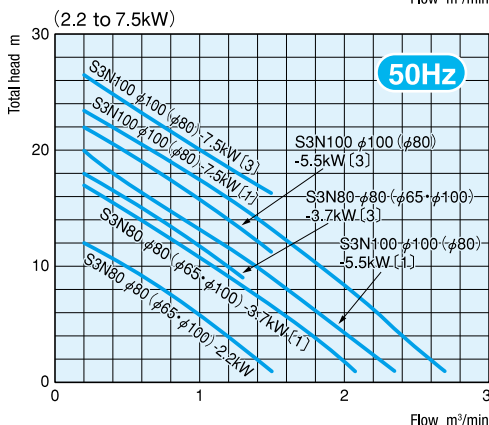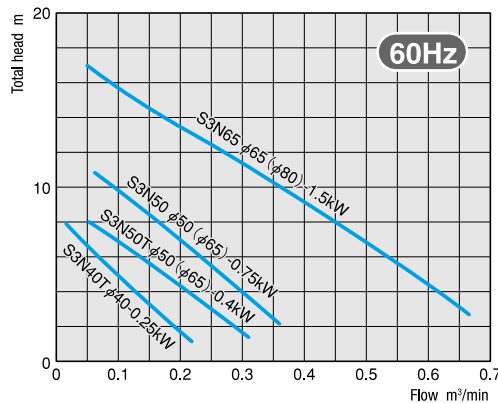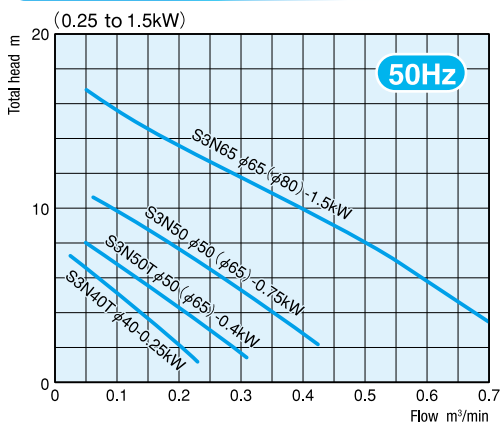

() indicates the impeller number.


* For detailed performance and dimensions, please contact your dealer or visit www.shinmaywa.co.jp/pump/english/.

S3V




Transferring or discharging sewage and wastewater containing a large amount of fibrous materials

0.25 to 7.5kW

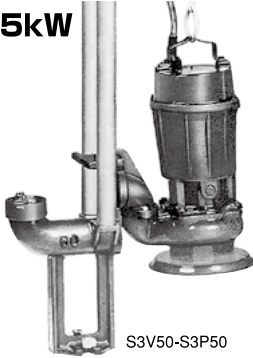

Dimensions (Unit: mm)

● Free standing type ● Guide rail installation type




Auto operation <S3V-D>


Auto-alternate operation <S3V-DW>

Pump model		
Auto operation	Auto-alternate operation	
Pair name	Pump No. 1 and 2	
S3V40DT	S3V40DWT	S3V40WT+S3V40DT
S3V50DT	S3V50DWT	S3V50WT+S3V50DT
S3V50D	S3V50DW	S3V50W+S3V50D
S3V65D	S3V65DW	S3V65W+S3V65D

● Free standing type



● Guide rail installation type



Standard Specifications

Discharge mm	Pump model	Installation kit No.		Rated output kW	Phase	Flow - Total head m³/min-m		No. of poles	Solid passage dia. (Soft solid) (mm)		Pump weight kg	
		Guide rail installation	Free standing			50Hz	60Hz		50Hz	60Hz	S3V	S3V-D S3V-W
40	S3V40T	S3P40	S3F40	0.25	3	0.1 - 4.4	0.09 - 4.3	2	19	19	19	20
50	S3V50T	S3P50	S3F50	0.4	3	0.14 - 4.7	0.14 - 4.3	2	26	26	20	21
(65)	S3V50			0.75		0.17 - 7.4	0.17 - 7.3				23	24
65 (80)	S3V65	S3P65	S3F65	1.5	3	0.42 - 8.0	0.38 - 8.0	2	28	28	38	40
80	S3V80	S3P80B	S3F80	2.2	3	0.8 - 6.6	0.7 - 6.8	4	28	28	63	-
(65) (100)				3.7		1.0 - 8.8	0.9 - 9.5				76	
100 (80)	S3V100	S3P100B	S3F100	5.5	3	1.2 - 10.4	1.2 - 10.8	4	33	33	103	-
				7.5		(1) 1.3 - 12.8 (2) 1.3 - 12.8 (3) 0.8 - 17.5 (4) 0.8 - 18.4					117	

* A pump with a discharge size within parentheses () is also available. () indicates the impeller number.
* The starting method is direct-on-line.
Note: Please inform us of the pump model and installation kit number.

Pump model	Installation kit No.	Rated output kW	A	B	C	D	E	F
S3V40T	S3F40	0.25	370	245	188	100		
S3V50 (T)	S3F50	0.4-0.75	403	245	188	115		
S3V65	S3F65	1.5	490	418	220	125		
S3V80	S3F80	2.2	550	524	292			
		3.7	612	543	331	190		
S3V100	S3F100	5.5	640	618	355			
		7.5	675	633	387	190		
S3V40T	S3P40	0.25	441	443	188	170	550	350
S3V50 (T)	S3P50	0.4-0.75	461	443	188	175	550	350
S3V65	S3P65	1.5	566	663	220	200	550	350
		2.2	620	830	292		600	500
S3V80	S3P80B	3.7	682	849	331	260	700	600
		5.5	710	920	355			
S3V100	S3P100B	7.5	745	935	387	260	700	600





Cable specifications

- 0.25~0.75kW : VCT 1.25mm²×4cores outer dia.φ11.5mm 6m
- 1.5kW : VCT 1.25mm²×4cores outer dia.φ11.5mm 10m
- 2.2kW : VCT 1.25mm²×4cores outer dia.φ11.5mm 8m
- 3.7kW : VCT 2.0mm²×4cores outer dia.φ12 mm 8m
- 5.5kW : VCT 3.5mm²×4cores outer dia.φ14 mm 8m
- 7.5kW : VCT 5.5mm²×4cores outer dia.φ16.5mm 8m

* VCT: PVC insulated PVC sheathed cable

Pump model	Installation kit No.	Rated output kW	A	B	C	D	E	F
S3V40DT	S3F40	0.25	404	245	188	115	540	
S3V50 (T)	S3F50	0.4-0.75	437	245	188	125	575	
S3V65D	S3F65	1.5	548	473	225	275	745	
S3V40WT	S3F40	0.25	404	245	188	155	490	640
S3V50 (T)	S3F50	0.4-0.75	437	245	188	165	525	675
S3V65W	S3F65	1.5	548	473	225	335	695	875
S3V40DT	S3P40	0.25	475	443	188	185	610	
S3V50 (T)	S3P50	0.4-0.75	495	443	188	185	635	
S3V65D	S3P65	1.5	624	663	225	350	820	
S3V40WT	S3P40	0.25	475	443	188	225	560	710
S3V50 (T)	S3P50	0.4-0.75	495	443	188	225	585	735
S3V65W	S3P65	1.5	624	663	225	410	770	950

Performance Curves

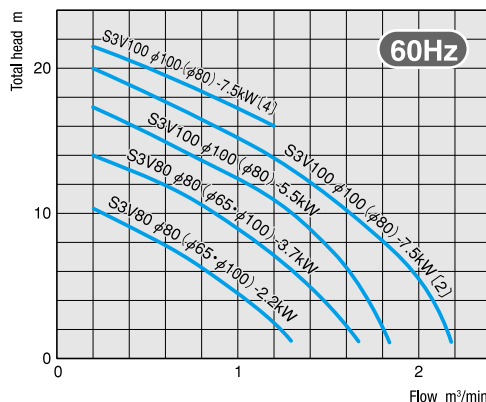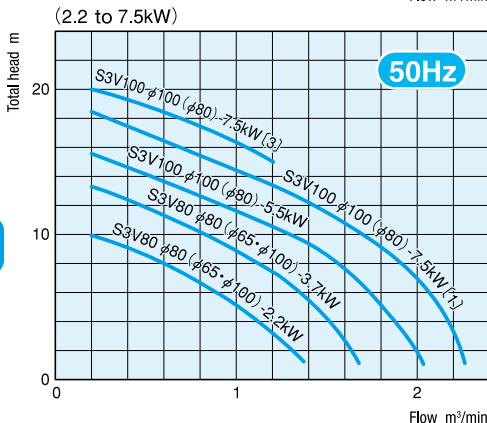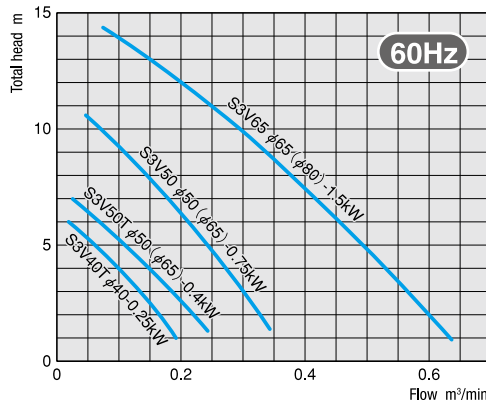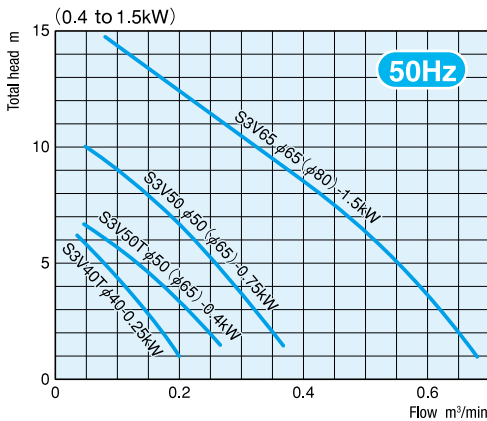

() indicates the impeller number.

* For detailed performance and dimensions, please contact your dealer or visit www.shinmaywa.co.jp/pump/english/.

Accessory List

Standard Accessories (incorporated into the pump)

Impeller	Pump series	Page	Cable							Float switch*1	Stand	Suction pipe	Sliding bracket	Starting unit
			6m	8m				16m						
			1 pc.	1 pc.	2 pcs.		3 pcs.	1 pc.	2 pcs.					
			0.75kW or less	1.5 to 7.5kW	1.5 to 7.5kW	11kW or more	11kW or more	6・6.5 kW	11・13 kW					
Channel impeller	CN-MT 0.25 to 1.5kW	6												
	CN-MT・CN・CNH 2.2 to 22kW	7					*3							
	CNMJ-MT 1.5 to 7.5kW	8												
	CNL 0.25 to 1.5kW	9												
	CNT 1.5 to 22kW CNT150B 6 to 13kW	9			*2		*3				*4			
Chopper / Cutter / Grinder pump	CJ (Chopper) 0.75 to 7.5kW	10												
	CK (Cutter) 3.7 to 5.9kW	11												
	CKM (Grinder) 0.4 to 3.7kW	12		 (1.0 kW or more)										*5
Vortex impeller	CV-MT・CV 0.4 to 1.5kW	13												
	CV・CVH 5.5 to 22kW	14					*3							
	CVS-MT・CVS 0.25 to 11kW	15					*3							
	CVC-MT・CVC 0.25 to 7.5kW	17												
	CVM 0.4 to 7.5kW	18												
Screw impeller	CW・CWH 1.5 to 22kW	19					*3							
	CWT 1.5 to 22kW	20			*2		*3				*4			
Multi-vane semi-open impeller	A 0.25 to 1.5kW	21												
	AH 0.4 to 11kW	22					*3							
Stainless steel submersible pump	S3A (Multi-vane semi-open) 0.25 to 1.5kW	24		 (10 m for 1.5 kw)										
	S3N (Channel) 0.25 to 7.5kW	25		 (10 m for 1.5 kw)										
	S3V (Vortex) 0.25 to 7.5kW	26		 (10 m for 1.5 kw)										

*1: The float switch is only used for auto operation and auto-alternate operation models.
*2: Two cables. One is for motor power and the other is for protector signal.
*3: Three cables. Two are for motor power and one is for protector signal.
*4: The stand and suction pipe are integrated.
*5: The starting unit comes as standard only with CKM32HS (single-phase 200 V). Be sure to install the starting unit for a single-phase pump before starting operation.

For changing the voltage, extending cables, or changing parts material, please contact us or your dealer.

Guide Rail Installation Type

- Discharge connection
- Guide holder (with bolts and nuts)
- Sliding bracket (built into the pump for the CK series)
- Lifting chain (6 m)

Impeller				Channel impeller				Chopper / Cutter / Grinder pump				Vortex impeller					Screw impeller	Multi-vane semi-open impeller		Stainless steel submersible pump		
Discharge size mm	Installation kit No.	Set weight kg	Connection weight kg	CN-MT 0.25 to 1.5 kW	CN-MT·CN·CNH 2.2 to 22 kW	CNMJ-MT 1.5 to 7.5 kW	CNL 0.25 to 1.5 kW	CJ 0.75 to 7.5 kW	CK 3.7 to 5.9 kW	CKM 0.4 to 3.7 kW	CV-MT·CV 0.4 to 1.5 kW	CV·CVH 5.5 to 22 kW	CVS-MT·CVS 0.25 to 11 kW	CVC-MT·CVC 0.25 to 7.5 kW	CVM 0.4 to 7.5 kW	CW·CWH 1.5 to 22 kW	A 0.25 to 1.5 kW	AH 0.4 to 11 kW	S3A 0.25 to 1.5 kW	S3N 0.25 to 7.5 kW	S3V 0.25 to 7.5 kW	
Page				6	7	8	9	10	11	12	13	14	15	17	18	19	21	22	24	25	26	
32	P32	11	4.5																			
40	P40	11	4.5																			
	S3P40	12	6.5																			
50	P50	11	4.5																			
	S3P50	12	6.5																			
65	P65	24	15																			
	P65B	20	14.5																			
	※ P65G	24	15																			
	S3P65	26	17																			
80	P80	31.5	20.5																			
	P80B	31.5	18																			
	P80F	44	40																			
	※ P80G	38.5	25																			
	S3P80B	34	20																			
100	P100	40.5	27																			
	P100B	40.5	27																			
	P100C	55	37																			
	P100E	44	40																			
	※ P100G	44	30.5																			
	※ P100CG	44	30.5																			
	S3P100B	44	30																			
150	P150	60	42																			

The asterisk ※ indicates a special installation kit number.

Free Standing Type

- Discharge flange
- Companion flange (with bolts, nuts, and gasket)

Impeller			Channel impeller				Chopper / Cutter / Grinder pump			Vortex impeller						Screw impeller	Multi-vane semi-open impeller		Stainless steel submersible pump		
Discharge size mm	Installation kit No.	Set weight kg	CN-MT	CN-MT- CN-CNH	CNMJ-MT	CNL	CJ	CK	CKM	CV-MT- CV	CV-CVH	CVS-MT- CVS	CVC-MT- CVC	CVM	CW-CWH	A	AH	S3A	S3N	S3V	
			0.25 to 1.5 kW	2.2 to 22 kW	1.5 to 7.5 kW	0.25 to 1.5 kW	0.75 to 7.5 kW	3.7 to 5.9 kW	0.4 to 3.7 kW	0.4 to 1.5 kW	5.5 to 22 kW	0.25 to 11 kW	0.25 to 7.5 kW	0.4 to 7.5 kW	1.5 to 22 kW	0.25 to 1.5 kW	0.4 to 11 kW	0.25 to 1.5 kW	0.25 to 7.5 kW	0.25 to 7.5 kW	
Page			6	7	8	9	10	11	12	13	14	15	17	18	19	21	22	24	25	26	
32	F32	Built into the pump							Free standing type is not available	★											
40	F40	Built into the pump	★							★			★				★	★			
	S3F40	Built into the pump																	★	★	★
50	F50	Built into the pump	★				★	★		★	★		★	★	★		★	★			
	S3F50	Built into the pump																	★	★	★
65	F65	7	🟢	🟢			🟢	🟢			🟢		🟢	🟢	🟢	🟢	🟢	🟢			
	F65B	5.5	🟢				🟢	🟢			🟢		🟢				🟢	🟢			
	S3F65	8																	🟢	🟢	🟢
80	F80	9.5	🟢	🟢	🟢	🟢	🟢				🟢		🟢	🟢	🟢	🟢	🟢	🟢			
	S3F80	11																		🟢	🟢
100	F100	11		🟢	🟢								🟢	🟢		🟢		🟢			
	F100B	12		🟢								🟢				🟢					
	S3F100	12																		🟢	🟢
150	F150	30		🟢								🟢			🟢	🟢					

★ indicates that the companion flange is built into the pump.

Motor Protector List

Channel impeller (P6-9)

	Pump model	Rated output kW	Motor protector		
			Thermal protector	Thermal switches	Leakage detector
CN-MT CN· CNH	CN401T-MT	0.25			
	CN501T-MT	0.4		×	×
	CN501-MT	0.75			
	CN651-MT	1.5	●		
	CN80-MT	2.2			
		3.7		△	
	CN100-MT	5.5			
		7.5			
	CNH100	11			
		15	×	●	▲
		22			
	CN150-MT	5.5	●	△	
CNMJ-MT		7.5			
	CNMJ80-MT	11			
		15			
		22			
	CNMJ100-MT	1.5	●	△	▲
CNL	CNL502	2.2	●	×	×
		0.4			
	CNL652	0.75		△	▲
CNT	CNT651	1.5			
	CNT801	2.2			
		3.7			
	CNT1001	5.5	×	●	
		7.5			
	CNT1501	11			▲
		15			
	CNT150B	22	△	△	
		6/6.5	×		
		11/13			

Chopper / Cutter / Grinder pump (P10-12)

	Pump model	Rated output kW	Motor protector		
			Thermal protector	Thermal switches	Leakage detector
CJ	CJ501	0.75		×	×
	CJ651 (D·W)	1.5			
	CJ80	2.2	●		
		3.7		△	▲
	CJ100	5.5			
CK		7.5			
	CK80/100	3.7/4.5	●	△	▲
CKM		5.5/5.9			
	CKM32HS	1.0			
	CKM32H	1.0		×	×
	CKM40H	1.2			
		1.5	●		
	CKM50H	2.2		△	▲
		3.7			
	CKM40L	0.4		×	×
	CKM50L	0.75			

Vortex impeller (P13-18)

	Pump model	Rated output kW	Motor protector		
			Thermal protector	Thermal switches	Leakage detector
CV-MT CV CVH	CV501T	0.4			
	CV501 (D·W)	0.75	●	×	×
	CV501 (D·W), CV501-MT	1.5			
	CV651 (D·W)	1.5			
		11			
	CVH100	15	×	●	
		22			
		5.5	●	△	▲
		7.5			
	CV150	11			
		15	×	●	
		22			
CVS-MT CVS	CVS401T-MT	0.25			
	CVS501T-MT	0.25			
		0.4		×	×
	CVS501-MT	0.75			
	CVS651 (D·W), CVS651-MT	1.5	●		
	CVS80	2.2			
		3.7		△	
CVC-MT CVC	CVS100	5.5			▲
		7.5			
		11	×	●	
	CVC501	0.25			
		0.4		×	×
CVM		0.75			
	CVC651-MT	1.5	●		
	CVC801	1.5			
		2.2			
	CVC801-MT	3.7		△	▲
		5.5			
	CVC1001-MT	7.5			
		11			
	CVM50	0.4		×	×
		0.75			
CVC-MT CVC	CVM65	1.5			
		2.2			
		3.7			
		5.5			
		7.5			
	CVM80	1.5	●		
		2.2			
		3.7			
		5.5		△	▲
		7.5			
	CVM100	3.7			
		5.5			
		7.5			
	CVM150	5.5			
		7.5			

Screw impeller (P19, 20)

	Pump model	Rated output kW	Motor protector		
			Thermal protector	Thermal switches	Leakage detector
CW-CWH	CW65	1.5			
		1.5			
	CW80	2.2	●	△	
		3.7			
	CW100	5.5			
		7.5			
	CWH100	11			
		15	×	●	▲
		22			
		5.5	●	△	
		7.5			
	CW150	11			
CWT		15	×	●	
		22			
	CWT65	1.5			
	CWT80	2.2			
		3.7			
	CWT100	5.5	×	●	▲
		7.5			
	CWT150	11			
		15			
		22			

Multi-vane semi-open impeller (P21, 22)

	Pump model	Rated output kW	Motor protector		
			Thermal protector	Thermal switches	Leakage detector
A	A401T	0.25			
	A501T	0.4	●	×	×
	A501	0.75			
	A652 (D·W)	1.5			
	AH401T	0.4			
AH	AH501	0.75		×	×
	AH502 (D·W)	1.5			
	AH651	2.2	●		
	AH801	3.7		△	
		5.5			▲
	AH1001	7.5			
		11	×	●	

Stainless steel submersible pump (P24-26)

	Pump model	Rated output kW	Motor protector		
			Thermal protector	Thermal switches	Leakage detector
S3A	S3A40 (D·W) T	0.25			
		0.4			
	S3A50 (D·W) T	0.4	●	×	×
		0.75			
	S3A50 (D·W)	1.5			
S3N	S3A65 (D·W)	1.5			
	S3N40 (D·W) T	0.25			
	S3N50 (D·W) T	0.4		×	×
	S3N50 (D·W)	0.75			
	S3N65 (D·W)	1.5	●		
	S3N80	2.2			
		3.7		△	▲
	S3N100	5.5			
S3V		7.5			
	S3V40 (D·W) T	0.25			
	S3V50 (D·W) T	0.4		×	×
	S3V50 (D·W)	0.75			
	S3V65 (D·W)	1.5	●		
	S3V80	2.2			
		3.7		△	▲
	S3V100	5.5			
		7.5			

Symbol Description

- : Provided as a standard part.
- △: Mountable if ordered.
- ×: Cannot be mounted due to structure.
- ▲: Electrode type can be installed upon order.

Lineup of ShinMaywa's Submersible Pumps for Wastewater Treatment

* For details, please request a separate catalog.

CNWX

**High Efficiency and
High Solid Passage Capability**

Non-Clog Scroll Submersible Pump

Solid size: 100% of discharge size
Discharge size: 50 - 100 mm
Rated output: 0.75 - 7.5 kW



CN (Large-sized)

Channel Impeller Type (Large Size)

Forced-cooling

Discharge size: 200 - 800 mm
Rated output: 7.5 - 250 kW

Natural-cooling

Discharge size: 200 - 400 mm
Rated output: 7.5 - 45 kW



CNX

3-inch Solid Pass-through Type

Closed-loop cooling

Discharge size: 150 - 300 mm
Rated output: 11 - 37 kW

Natural cooling type

Discharge size: 150 - 300 mm
Rated output: 5.5 - 37 kW



CR·CRS·CRC

NORUS

Lightweight Submersible Pumps NORUS

Discharge size: 32 - 80 mm
Rated output: 0.1 - 2.2 kW

NORUS series submersible pump offers three advantages: toughness, lightweight and corrosion resistance in combination with highly functional resin and stainless steel.



CNF·CVF·CWF

Submersible Pump with Flywheel

CNF Channel Impeller Type

Discharge size: 80 - 500 mm
Rated Output: 5.5 - 75 kW

CVF Vortex Impeller Type

Discharge size: 80 - 150 mm
Rated Output: 5.5 - 22 kW

CWF Screw Impeller Type

Discharge size: 80 - 150 mm
Rated Output: 5.5 - 22 kW



Submersible Mixed and Axial Flow Pump

SD·SA

Discharge size: 300 - 1,000 mm
Rated output: 11 - 150 kW



FP

Floating Pump

Discharge size: 50 - 80 mm
Rated output: 0.75 - 1.5 kW



For gate use SAH

Discharge size: 300 - 800 mm
Rated output: 7.5 - 75 kW



For low water level SAH-L

Discharge size: 400 - 900 mm
Rated output: 7.5 - 90 kW



* Technical Standards (draft) and Commentaries for Pump System developed by the Association for Pump System Engineering

Liquid level control equipment -
All models are of an environmentally-friendly no-mercury structure.

LC

Level regulator

Useful for potable water, wastewater and sewage containing suspended solids.
Strong for corrosion or rust even when immersed in a corrosive liquid.



MS

Mini switch

Useful for wastewater and sewage containing a few suspended solids.
The MS is available in two types, MS11 (single float) and MS21 (double float).



FV

Oval float

Useful for fresh water as well as wastewater not containing suspended solids.
A single FV can control both the upper and lower liquid levels.



ShinMaywa Pump Selector

ShinMaywa Pump Selector provides you to make easy selection from variety of ShinMaywa pump products to meet your application.

You can get pump selection and datasheet (specifications and performance curve) easily.

In addition to datasheet, you can also get technical information for selected pump including catalogue, drawings, CAD data, etc. through ShinMaywa Product Data Download system seamlessly.

Using ShinMaywa Pump Selector, you can make your decision quickly and make smooth communication with our sales representatives.

[Note] Please contact to our sales representatives for confirmation prior to place the order of ShinMaywa Pump products.



Specifications and dimensions are subject to change without notice.

ShinMaywa Industries, Ltd.

**Global Sales Dept.
Sales & Marketing Dept., Fluid Div.**

3-2-43, Shitte, Tsurumi-ku, Yokohama, 230-0003, Japan
Phone : +81-45-584-1322 Fax : +81-45-575-2286
E-mail : global.pump@shinmaywa.co.jp

ShinMaywa (Asia) Pte. Ltd.

15 Tuas South Street 8, Singapore 637109
Phone : +65-6224-0728
Fax : +65-6224-9678
E-mail : asia.ad@shinmaywa.com.sg

Thai ShinMaywa Co., Ltd.

199 Moo 12, Soi Petchakasem 120, Petchakasem Road,
Om-noi, Krathumban, Samutsakorn 74130 Thailand
Phone : +66-2-420-4712
Fax : +66-2-420-9863
E-mail : tsmc.fluid.sales@shinmaywa.co.jp

ShinMaywa (Shanghai) Trading Co., Ltd.

201107 Building 6, Youlejiia City, Industrial Park, 333 Lane,
Zhujian Road Minhang, Shanghai, China
Phone : +86-21-5296-2966
Fax : +86-21-5296-2970
E-mail : shanghai@shinmaywa.co.jp

ShinMaywa (America), Ltd.

Headquarters
10737 Gateway West, Suite 240,
El Paso, Texas 79935, U.S.A.
Phone : +1-915-594-9862
Fax : +1-915-594-9866
E-mail : info@shinmaywaamerica.com

North Carolina Branch
6135 Park South Drive, Suite 510
Charlotte, NC, 28210, U.S.A.
Phone : +1-704-945-7112
Fax : +1-704-945-7101
E-mail : pump@shinmaywaamerica.com

URL : <https://www.shinmaywa.co.jp/america/index.html>

<https://www.shinmaywa.co.jp/pump/english/index.html>



Website

ShinMaywa ONO PLANT

ISO 9001-0066539/ISO 14001-0066652

'23. 10 Z-W022B Printed in Japan 4 ㊞