






FIG. 4

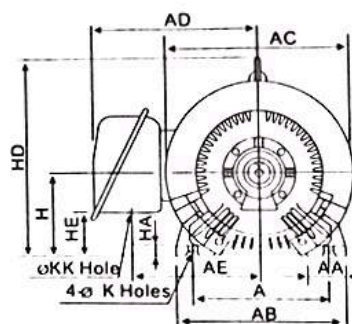




FIG. 5

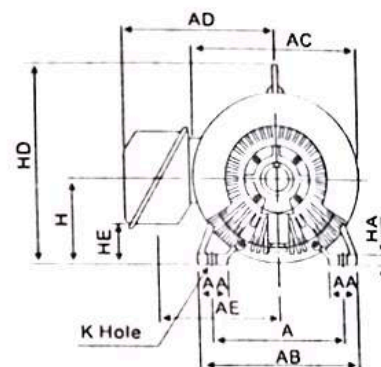




FIG. 6

K	KK	L	LE	SHAFT END 軸端處								BEARINGS 培林		WEIGHT 重量 KGS
				D	E	ED	EE	F	G	GA	DH	LOAD SIDE	OUT OF LOAD SIDE	
7	Ø22	250.5	85.5	14	30	25	-	5	11.0	16.0	M6*10	6202ZZ	6202ZZ	11.5
10	Ø22	282.5	92.5	19	40	35	-	6	15.5	21.5	M6*12	6204ZZ	6204ZZ	15.5
10	Ø20	310.0	105.0	24	45	45	-	8	20.0	27.0	M8*16	6205ZZ	6204ZZ	18.5
10	Ø22	332.5	101.5	24	50	45	-	8	20.0	27.0	M8*16	6205ZZ	6205ZZ	24.5
12	Ø28	374.5	111.5	28	60	55	-	8	24.0	31.0	M10*20	6206ZZ	6305ZZ	36.0
12	Ø28	391.5	121.5	28	60	55	-	8	24.0	31.0	M10*20	6306ZZ	6306ZZ	46.0
12	Ø35	545.0	145.0	38	80	75	-	10	33.0	41.0	M12*24	6308ZZ	6306ZZ	68.0
12	Ø35	492.0										6308ZZ	6306ZZ	79.0
14.5	35	608.0	180.0	42	110	105	-	12	37.0	45.0	M16*32	6309ZZ	6307ZZ	125.0
		652.0										6309ZZ	6307ZZ	140.0
14.5	52	672.0	200.0	48	110	105	-	14	42.5	51.5	M16*32	6311ZZC3	6310ZZC3	179.0
												6311ZZ	6310ZZ	195.0
14.5	52	710.0	200.0	55	110	105	-	16	49.0	59.0	M20*40	6312ZZC3	6310ZZC3	198.0
												6312ZZ	6310ZZ	223.0
18.5	65	774.5	226.5	55	110	105	-	16	49.0	59.0	M20*10	6312ZZC3	6212ZZC3	312.0
		804.5		60	140	135	-	18	53.0	64.0	M20*10	6314ZZ	6312ZZ	324.0
	92	786.0	241.0	55	110	105	-	16	49.0	59.0	M20*10	6312ZZC3	6312ZZC3	400.0
		816.0		65	140	135	-	18	58.0	69.0	M20*10	6315ZZ	6313ZZ	412.0
24	92	852.5	263.5	55	110	105	-	16	49.0	59.0	M20*10	6313C3	6312ZZC3	449.0
		882.5		75	140	135	-	20	67.5	79.5	M20*10	NU316	6313	508.0

Note:

1. Shaft diameter of D common difference: Ø 11-Ø 28: J6, Ø 38-Ø 48: k6, Ø 55-Ø 75: m6.
2. Shaft height of H common difference: +0, -0.5
3. All figures will be in mm.